



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

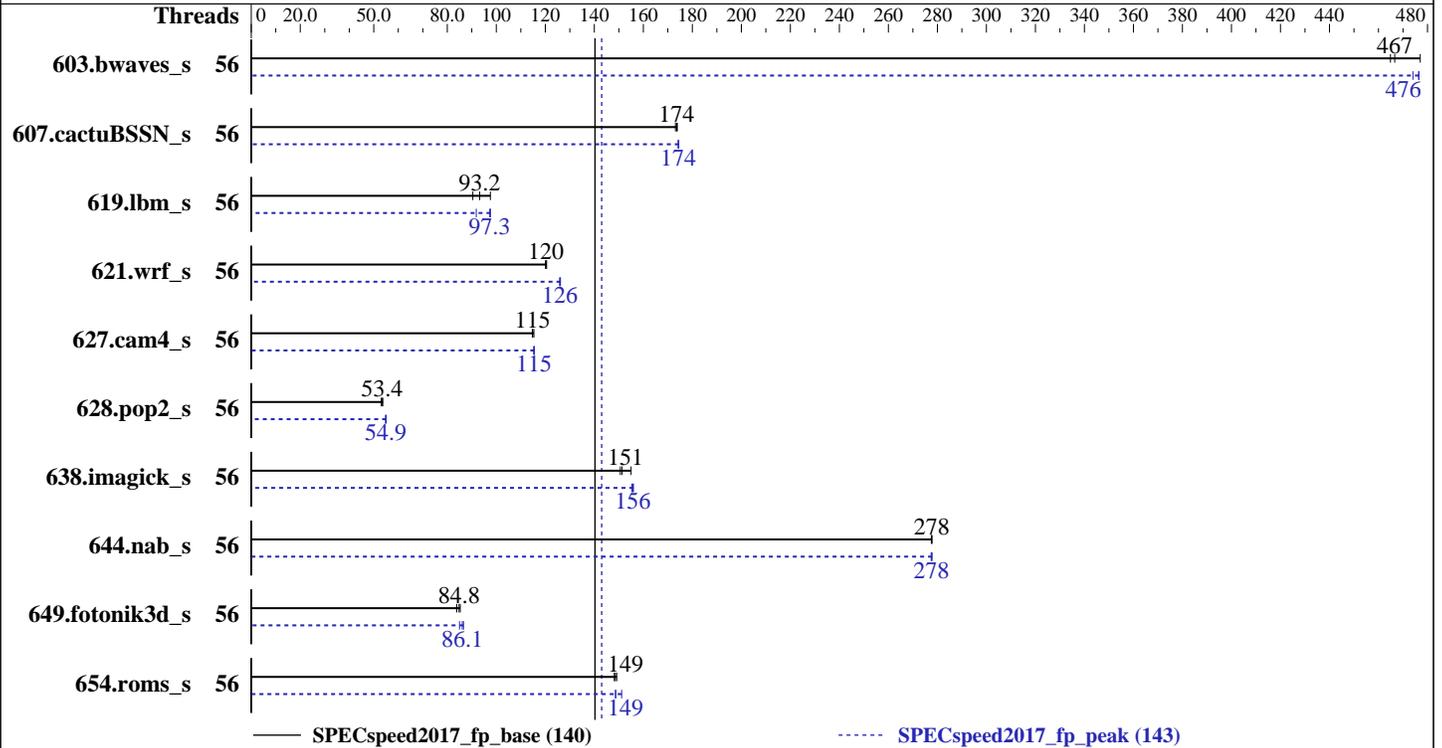

### Hardware

CPU Name: Intel Xeon Platinum 8276  
 Max MHz.: 4000  
 Nominal: 2200  
 Enabled: 56 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 3840 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64) 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: Yes  
 Firmware: Version 6.36 Released Feb-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	124	477	127	465	<b>126</b>	<b>467</b>	56	124	474	<b>124</b>	<b>476</b>	124	476
607.cactuBSSN_s	56	95.9	174	96.3	173	<b>96.0</b>	<b>174</b>	56	95.7	174	<b>95.6</b>	<b>174</b>	95.6	174
619.lbm_s	56	57.9	90.4	<b>56.2</b>	<b>93.2</b>	53.7	97.6	56	57.0	91.8	53.7	97.6	<b>53.8</b>	<b>97.3</b>
621.wrf_s	56	110	121	110	120	<b>110</b>	<b>120</b>	56	105	126	<b>105</b>	<b>126</b>	105	126
627.cam4_s	56	76.8	115	77.3	115	<b>77.1</b>	<b>115</b>	56	76.9	115	76.7	116	<b>76.8</b>	<b>115</b>
628.pop2_s	56	<b>223</b>	<b>53.4</b>	224	53.1	221	53.7	56	216	54.8	216	55.1	<b>216</b>	<b>54.9</b>
638.imagick_s	56	95.8	151	93.1	155	<b>95.3</b>	<b>151</b>	56	92.5	156	92.9	155	<b>92.7</b>	<b>156</b>
644.nab_s	56	<b>62.9</b>	<b>278</b>	63.0	278	62.9	278	56	<b>62.9</b>	<b>278</b>	63.0	277	62.9	278
649.fotonik3d_s	56	107	85.3	<b>108</b>	<b>84.8</b>	109	83.9	56	107	85.0	<b>106</b>	<b>86.1</b>	105	86.6
654.roms_s	56	106	149	<b>106</b>	<b>149</b>	106	148	56	<b>106</b>	<b>149</b>	104	151	106	149

SPECspeed2017\_fp\_base = 140

SPECspeed2017\_fp\_peak = 143

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### Platform Notes (Continued)

XPT Prefetch Set to Enabled  
Sysinfo program /spec2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-5bz9 Fri Apr 12 19:29:26 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 28
siblings       : 28
physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
physical 1:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
```

```
From lscpu:
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          56
On-line CPU(s) list:  0-55
Thread(s) per core:  1
Core(s) per socket:  28
Socket(s):       2
NUMA node(s):    2
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Platinum 8276 CPU @ 2.20GHz
Stepping:        6
CPU MHz:         1000.000
CPU max MHz:     2201.0000
CPU min MHz:     1000.0000
BogoMIPS:        4400.00
Virtualization:  VT-x
L1d cache:       32K
L1i cache:       32K
L2 cache:        1024K
L3 cache:        39424K
NUMA node0 CPU(s):  0-27
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Platform Notes (Continued)

```
NUMA node1 CPU(s):      28-55
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 95163 MB
node 0 free: 94713 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 96470 MB
node 1 free: 94815 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

```
From /proc/meminfo
MemTotal:      196232724 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

### Platform Notes (Continued)

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-5bz9 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

```
run-level 3 Apr 12 14:53
```

```
SPEC is set to: /spec2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        btrfs    2.5T   12G  2.4T   1% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS INSYDE Corp. 6.36 02/15/2019
Memory:
12x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
4x NO DIMM NO DIMM
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
FC 607.cactuBSSN_s(base, peak)
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----  
CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

-----  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64  
607.cactuBSSN_s: -DSPEC_LP64  
619.lbm_s: -DSPEC_LP64  
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG  
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
-assume byterecl  
638.imagick_s: -DSPEC_LP64  
644.nab_s: -DSPEC_LP64  
649.fotonik3d_s: -DSPEC_LP64  
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 140

Huawei XH628 V5 (Intel Xeon Platinum 8276)

SPECspeed2017\_fp\_peak = 143

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Peak Optimization Flags (Continued)

649.fotonik3d\_s: Same as 603.bwaves\_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-12 07:29:26-0400.

Report generated on 2019-05-15 13:36:26 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.