SPEC® CPU2017 Integer Rate Result

Lenovo Global Technology

ThinkSystem SR950
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_base = 1260

SPECrate2017_int_peak = Not Run

CPU2017 License:	9017	**Test Date:**	May-2019
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Apr-2019
Tested by:	Lenovo Global Technology	**Software Availability:**	Dec-2018

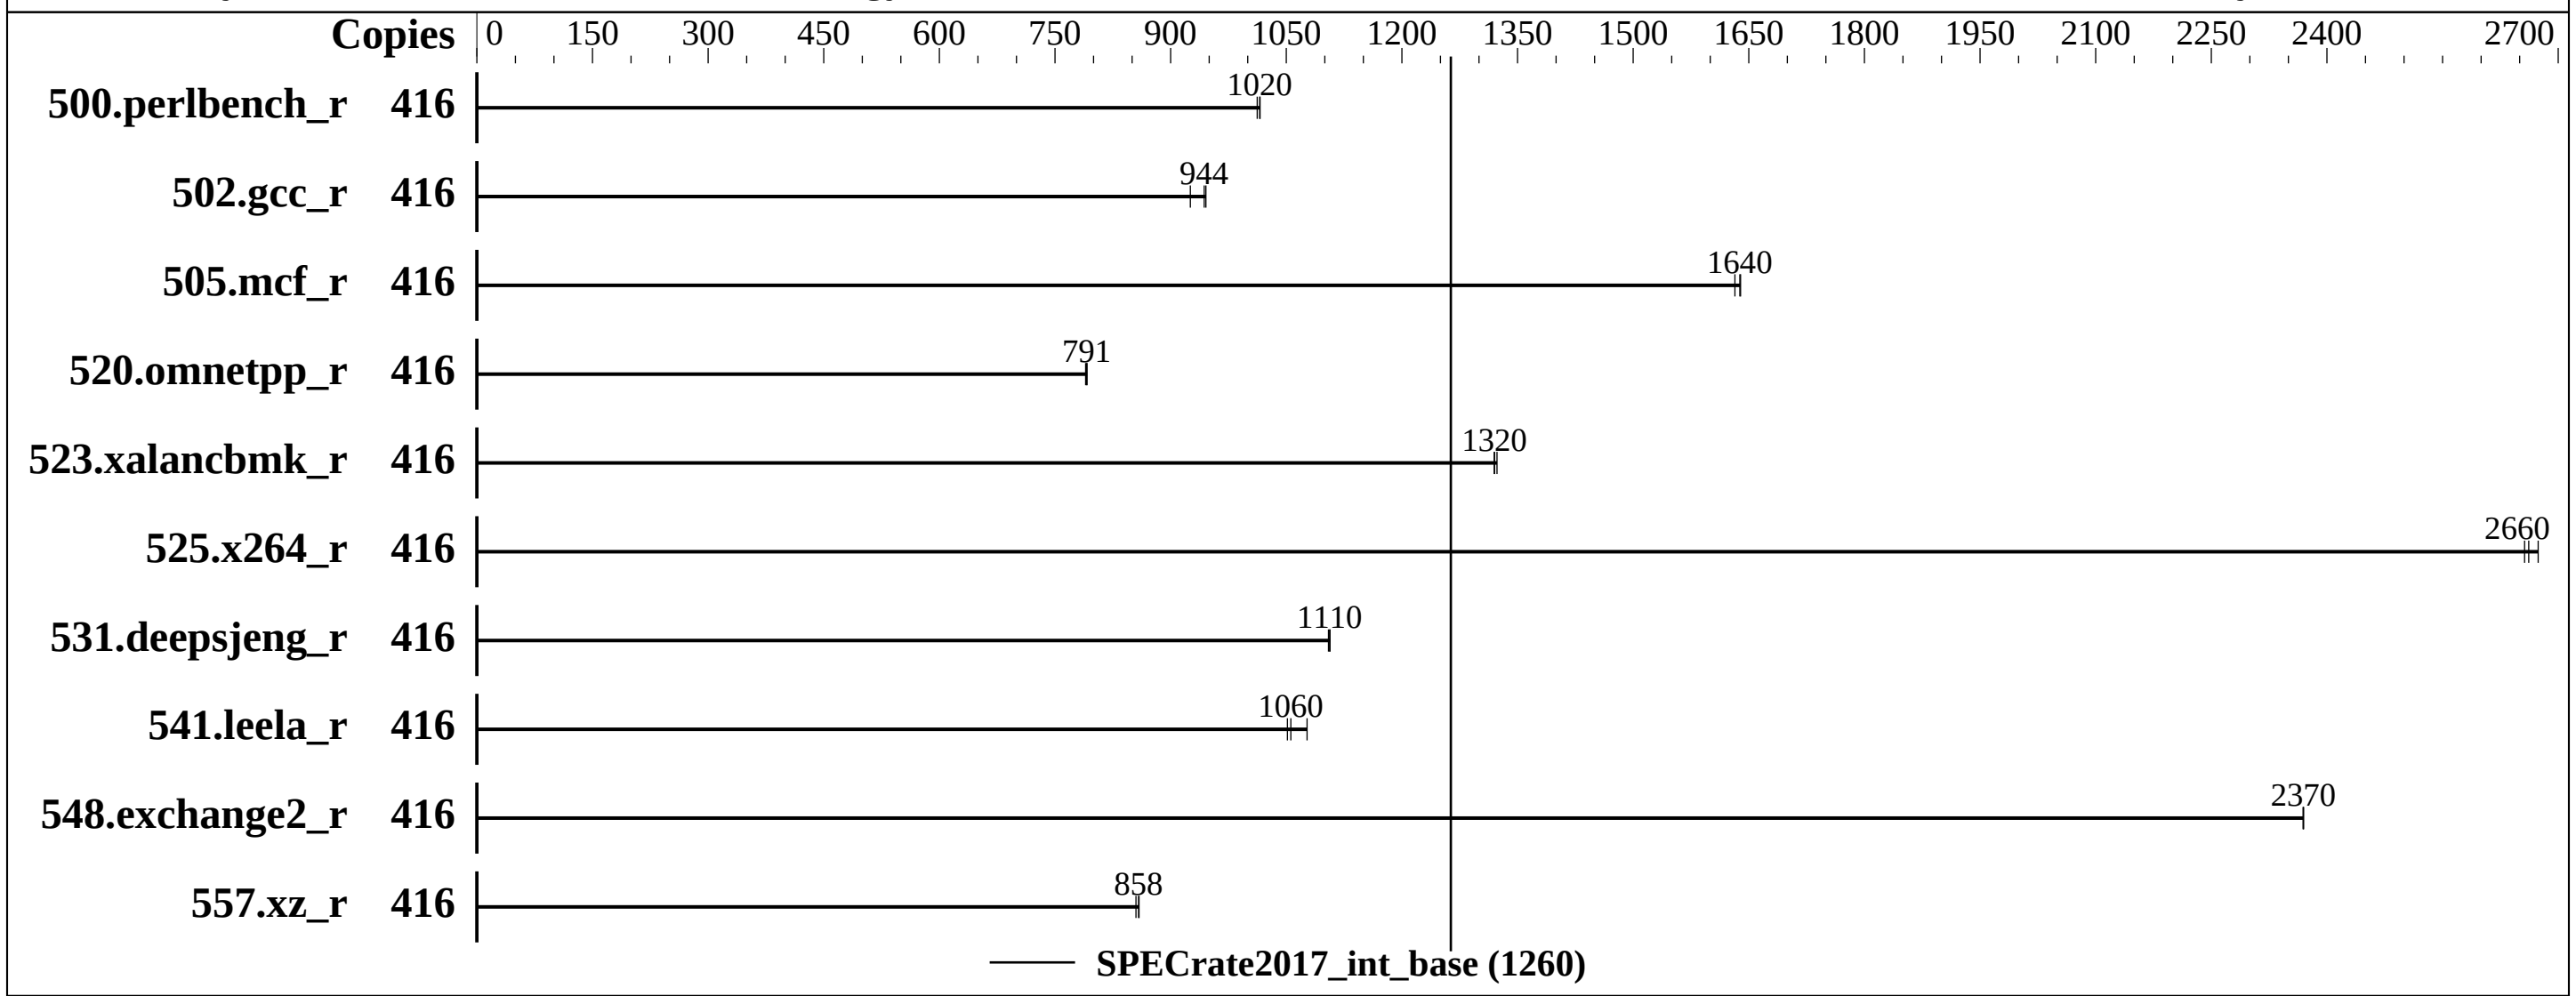

Hardware

CPU Name:	Intel Xeon Platinum 8270
Max MHz.:	4000
Nominal:	2700
Enabled:	208 cores, 8 chips, 2 threads/core
Orderable:	2,3,4,6,8 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	960 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version PSE121C 1.50 released Jan-2019
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	416	**652**	**1020**	654	1010	652	1020							
502.gcc_r	416	**624**	**944**	636	926	623	946							
505.mcf_r	416	**410**	**1640**	410	1640	412	1630							
520.omnetpp_r	416	**690**	**791**	691	790	690	792							
523.xalancbmk_r	416	333	1320	332	1320	**333**	**1320**							
525.x264_r	416	272	2670	274	2660	**274**	**2660**							
531.deepsjeng_r	416	431	1110	**431**	**1110**	432	1100							
541.leela_r	416	640	1080	655	1050	**652**	**1060**							
548.exchange2_r	416	460	2370	**460**	**2370**	460	2370							
557.xz_r	416	**523**	**858**	523	859	525	855							

SPECrate2017_int_base = 1260

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=960g tmpfs /home
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Trusted Execution Technology set to Enable
DCU Streamer Prefetcher set to Disable
SNC set to Enable
Patrol Scrub set to Disable
Stale AtoS set to Enable
 Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on sles12sp4 Thu May  2 08:44:22 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
       8  "physical id"s (chips)
       416 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 26
       siblings  : 52
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
       29
       physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
```

(Continued on next page)

Platform Notes (Continued)

```
        29
       physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
        29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                416
      On-line CPU(s) list:   0-415
      Thread(s) per core:    2
      Core(s) per socket:    26
      Socket(s):             8
      NUMA node(s):          16
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
      Stepping:              6
      CPU MHz:               2700.000
      CPU max MHz:           4000.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5400.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              36608K
      NUMA node0 CPU(s):     0-3,7-9,13-15,20-22,208-211,215-217,221-223,228-230
      NUMA node1 CPU(s):     4-6,10-12,16-19,23-25,212-214,218-220,224-227,231-233
      NUMA node2 CPU(s):     26-29,33-35,39-41,46-48,234-237,241-243,247-249,254-256
      NUMA node3 CPU(s):     30-32,36-38,42-45,49-51,238-240,244-246,250-253,257-259
      NUMA node4 CPU(s):     52-55,59-61,65-67,72-74,260-263,267-269,273-275,280-282
      NUMA node5 CPU(s):     56-58,62-64,68-71,75-77,264-266,270-272,276-279,283-285
      NUMA node6 CPU(s):     78-81,85-87,91-93,98-100,286-289,293-295,299-301,306-308
      NUMA node7 CPU(s):     82-84,88-90,94-97,101-103,290-292,296-298,302-305,309-311
      NUMA node8 CPU(s):
      104-107,111-113,117-119,124-126,312-315,319-321,325-327,332-334
      NUMA node9 CPU(s):
      108-110,114-116,120-123,127-129,316-318,322-324,328-331,335-337
      NUMA node10 CPU(s):
      130-133,137-139,143-145,150-152,338-341,345-347,351-353,358-360
      NUMA node11 CPU(s):
      134-136,140-142,146-149,153-155,342-344,348-350,354-357,361-363
      NUMA node12 CPU(s):
      156-159,163-165,169-171,176-178,364-367,371-373,377-379,384-386
      NUMA node13 CPU(s):
```

(Continued on next page)

Platform Notes (Continued)

```
      160-162,166-168,172-175,179-181,368-370,374-376,380-383,387-389
      NUMA node14 CPU(s):
      182-185,189-191,195-197,202-204,390-393,397-399,403-405,410-412
      NUMA node15 CPU(s):
      186-188,192-194,198-201,205-207,394-396,400-402,406-409,413-415
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
      avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 36608 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 208 209 210 211 215 216 217 221 222 223
   228 229 230
   node 0 size: 193120 MB
   node 0 free: 192321 MB
   node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 212 213 214 218 219 220 224 225 226
   227 231 232 233
   node 1 size: 193530 MB
   node 1 free: 192588 MB
   node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 234 235 236 237 241 242 243 247 248
   249 254 255 256
   node 2 size: 193530 MB
   node 2 free: 192866 MB
   node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 238 239 240 244 245 246 250 251 252
   253 257 258 259
   node 3 size: 193530 MB
   node 3 free: 192866 MB
   node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 260 261 262 263 267 268 269 273 274
   275 280 281 282
   node 4 size: 193530 MB
   node 4 free: 192868 MB
   node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 264 265 266 270 271 272 276 277 278
   279 283 284 285
   node 5 size: 193530 MB
   node 5 free: 192874 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 286 287 288 289 293 294 295 299
300 301 306 307 308
node 6 size: 193501 MB
node 6 free: 192846 MB
node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 290 291 292 296 297 298 302 303
304 305 309 310 311
node 7 size: 193530 MB
node 7 free: 192878 MB
node 8 cpus: 104 105 106 107 111 112 113 117 118 119 124 125 126 312 313 314 315 319
320 321 325 326 327 332 333 334
node 8 size: 193530 MB
node 8 free: 192874 MB
node 9 cpus: 108 109 110 114 115 116 120 121 122 123 127 128 129 316 317 318 322 323
324 328 329 330 331 335 336 337
node 9 size: 193530 MB
node 9 free: 192878 MB
node 10 cpus: 130 131 132 133 137 138 139 143 144 145 150 151 152 338 339 340 341 345
346 347 351 352 353 358 359 360
node 10 size: 193530 MB
node 10 free: 192870 MB
node 11 cpus: 134 135 136 140 141 142 146 147 148 149 153 154 155 342 343 344 348 349
350 354 355 356 357 361 362 363
node 11 size: 193530 MB
node 11 free: 192874 MB
node 12 cpus: 156 157 158 159 163 164 165 169 170 171 176 177 178 364 365 366 367 371
372 373 377 378 379 384 385 386
node 12 size: 193530 MB
node 12 free: 180133 MB
node 13 cpus: 160 161 162 166 167 168 172 173 174 175 179 180 181 368 369 370 374 375
376 380 381 382 383 387 388 389
node 13 size: 193530 MB
node 13 free: 192877 MB
node 14 cpus: 182 183 184 185 189 190 191 195 196 197 202 203 204 390 391 392 393 397
398 399 403 404 405 410 411 412
node 14 size: 193530 MB
node 14 free: 192876 MB
node 15 cpus: 186 187 188 192 193 194 198 199 200 201 205 206 207 394 395 396 400 401
402 406 407 408 409 413 414 415
node 15 size: 193527 MB
node 15 free: 192874 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  21  21  31  31  21  21  21  21  31  31  31  31  31  31
  1:  11  10  21  21  31  31  21  21  21  21  31  31  31  31  31  31
  2:  21  21  10  11  21  21  31  31  31  31  21  21  31  31  31  31
  3:  21  21  11  10  21  21  31  31  31  31  21  21  31  31  31  31
  4:  31  31  21  21  10  11  21  21  31  31  31  31  21  21  31  31
```

(Continued on next page)

Platform Notes (Continued)

```
     5:  31  31  21  21  11  10  21  21  31  31  31  31  21  21  31  31
     6:  21  21  31  31  21  21  10  11  31  31  31  31  31  31  21  21
     7:  21  21  31  31  21  21  11  10  31  31  31  31  31  31  21  21
     8:  21  21  31  31  31  31  31  31  10  11  21  21  21  21  31  31
     9:  21  21  31  31  31  31  31  31  11  10  21  21  21  21  31  31
    10:  31  31  21  21  31  31  31  31  21  21  10  11  31  31  21  21
    11:  31  31  21  21  31  31  31  31  21  21  11  10  31  31  21  21
    12:  31  31  31  31  21  21  31  31  21  21  31  31  10  11  21  21
    13:  31  31  31  31  21  21  31  31  21  21  31  31  11  10  21  21
    14:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  10  11
    15:  31  31  31  31  31  31  21  21  31  31  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       3170352592 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp4"

 uname -a:
    Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
 IBPB, IBRS_FW

 run-level 3 May 2 04:18

 SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1
```

(Continued on next page)

Platform Notes (Continued)

```
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  960G  8.3G  952G   1% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[PSE121C-1.50]- 01/16/2019
   Memory:
    96x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
      557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-01 20:44:22-0400.
Report generated on 2019-05-29 16:46:19 by CPU2017 PS formatter v6067.
Originally published on 2019-05-29.