



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

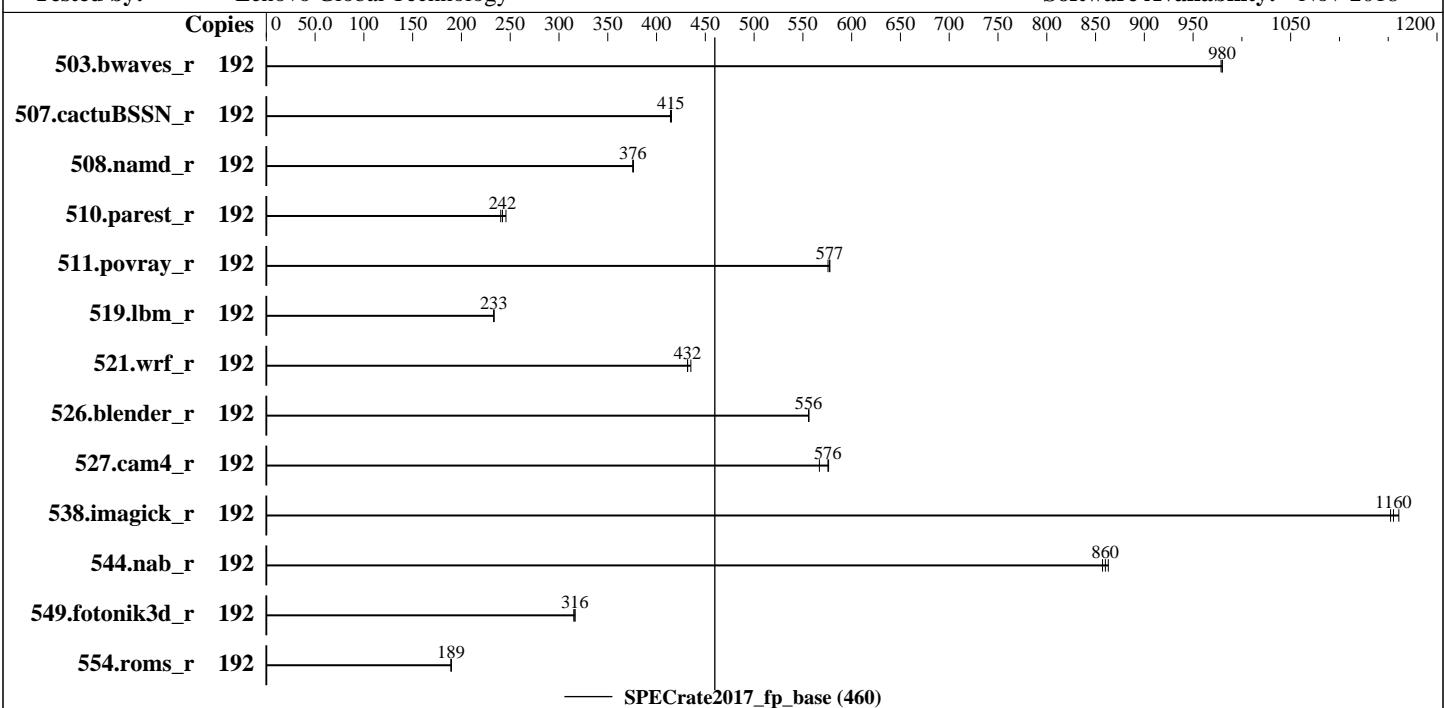

### Hardware

CPU Name: Intel Xeon Gold 6252  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 96 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
Compiler: Kernel 3.10.0-957.el7.x86\_64  
Parallel: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
Firmware: Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
File System: No  
System State: xfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

**SPECrate2017\_fp\_base = 460**

**SPECrate2017\_fp\_peak = Not Run**

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	1967	979	1965	980	<b>1965</b>	<b>980</b>							
507.cactuBSSN_r	192	587	414	585	415	<b>586</b>	<b>415</b>							
508.namd_r	192	<b>485</b>	<b>376</b>	485	376	485	376							
510.parest_r	192	2045	246	2090	240	<b>2075</b>	<b>242</b>							
511.povray_r	192	776	578	779	576	<b>776</b>	<b>577</b>							
519.lbm_r	192	<b>868</b>	<b>233</b>	867	233	868	233							
521.wrf_r	192	996	432	<b>996</b>	<b>432</b>	988	435							
526.blender_r	192	526	556	<b>526</b>	<b>556</b>	526	556							
527.cam4_r	192	592	567	583	576	<b>583</b>	<b>576</b>							
538.imagick_r	192	411	1160	<b>413</b>	<b>1160</b>	414	1150							
544.nab_r	192	377	857	374	863	<b>376</b>	<b>860</b>							
549.fotonik3d_r	192	2374	315	<b>2366</b>	<b>316</b>	2364	316							
554.roms_r	192	<b>1611</b>	<b>189</b>	1608	190	1611	189							

**SPECrate2017\_fp\_base = 460**

**SPECrate2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

LLC dead line alloc set to Disable

```
Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Wed May 8 01:15:01 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz
        4 "physical id"s (chips)
        192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 24 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             4
NUMA node(s):          8
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

**SPECrate2017\_fp\_base = 460**

**SPECrate2017\_fp\_peak = Not Run**

**CPU2017 License:** 9017

**Test Date:** May-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2018

## Platform Notes (Continued)

```

Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2100.000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,96-99,103-105,109-111,115,116
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,100-102,106-108,112-114,117-119
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,120-123,127-129,133-135,139,140
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,124-126,130-132,136-138,141-143
NUMA node4 CPU(s): 48-51,55,56,60-62,66-68,144-147,151,152,156-158,162-164
NUMA node5 CPU(s): 52-54,57-59,63-65,69-71,148-150,153-155,159-161,165-167
NUMA node6 CPU(s): 72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
NUMA node7 CPU(s): 76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc
cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 96 97 98 99 103 104 105 109 110 111 115 116
node 0 size: 97973 MB
node 0 free: 95527 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 100 101 102 106 107 108 112 113 114 117
118 119
node 1 size: 98304 MB
node 1 free: 95958 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 120 121 122 123 127 128 129 133 134
135 139 140

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Platform Notes (Continued)

```
node 2 size: 98304 MB
node 2 free: 95605 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 124 125 126 130 131 132 136 137 138
141 142 143
node 3 size: 98304 MB
node 3 free: 95939 MB
node 4 cpus: 48 49 50 51 55 56 60 61 62 66 67 68 144 145 146 147 151 152 156 157 158
162 163 164
node 4 size: 98304 MB
node 4 free: 95510 MB
node 5 cpus: 52 53 54 57 58 59 63 64 65 69 70 71 148 149 150 153 154 155 159 160 161
165 166 167
node 5 size: 98304 MB
node 5 free: 95948 MB
node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
183 187 188
node 6 size: 98304 MB
node 6 free: 95979 MB
node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
189 190 191
node 7 size: 98304 MB
node 7 free: 95947 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      792234904 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

run-level 3 May 8 01:11

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	839G	18G	822G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE135L-2.10]- 01/10/2019

Memory:

```
48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====
```

```
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
=====
```

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.10 GHz, Intel Xeon Gold 6252)

SPECrate2017\_fp\_base = 460

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: May-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Nov-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=4

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-05-07 13:15:00-0400.

Report generated on 2019-05-29 15:50:22 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-29.