



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

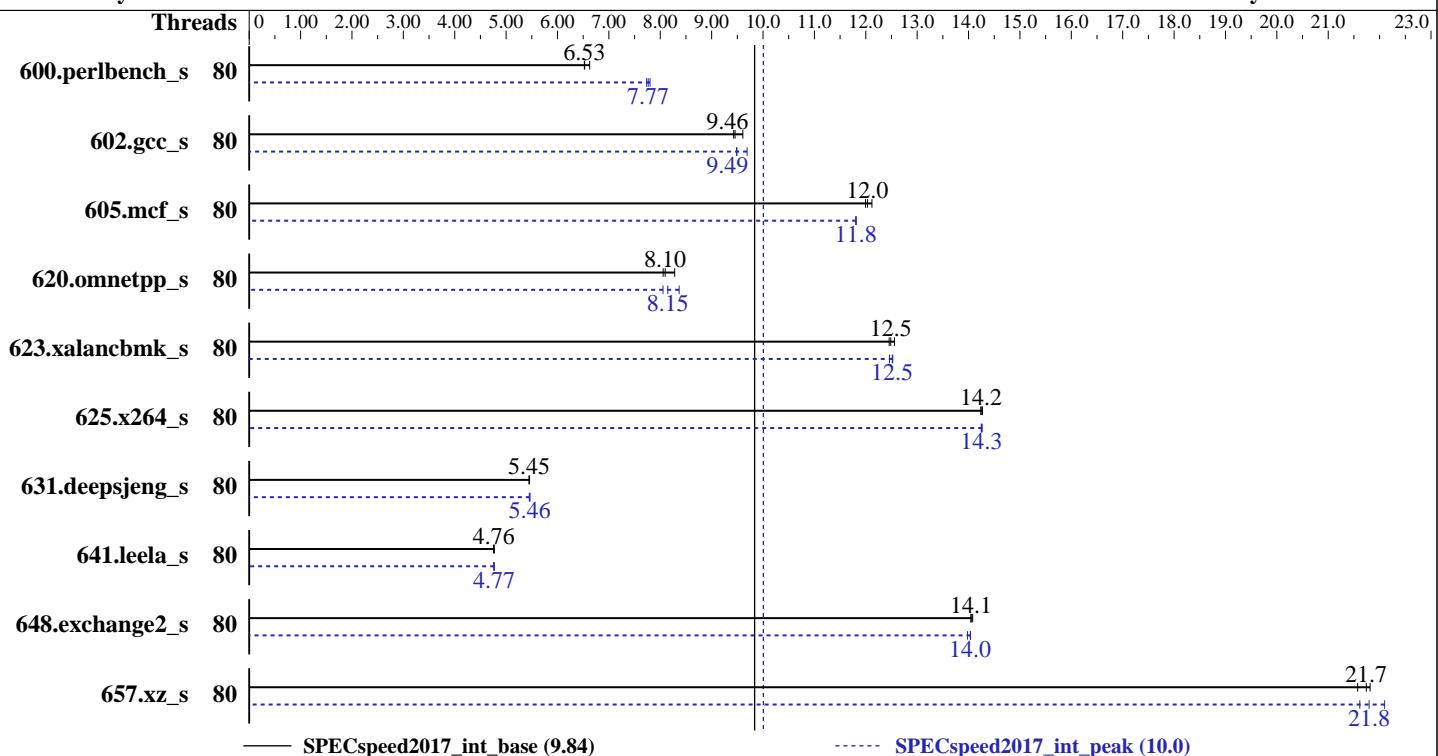

Hardware		Software	
CPU Name:	Intel Xeon Gold 6248	OS:	Ubuntu 18.04.2 LTS
Max MHz.:	3900		kernel 4.15.0-45-generic
Nominal:	2500	Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
Enabled:	40 cores, 2 chips, 2 threads/core		Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Orderable:	1,2 chips	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 2.2.2 released Mar-2019
L2:	1 MB I+D on chip per core	File System:	ext4
L3:	27.5 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)	Peak Pointers:	64-bit
Storage:	1 x 480 GB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None		



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECSpeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	80	268	6.63	272	6.52	<b>272</b>	<b>6.53</b>	80	229	7.73	228	7.80	<b>229</b>	<b>7.77</b>		
602.gcc_s	80	<b>421</b>	<b>9.46</b>	414	9.61	422	9.43	80	420	9.48	411	9.69	<b>419</b>	<b>9.49</b>		
605.mcf_s	80	390	12.1	<b>392</b>	<b>12.0</b>	394	12.0	80	<b>400</b>	<b>11.8</b>	400	11.8	400	11.8		
620.omnetpp_s	80	<b>201</b>	<b>8.10</b>	202	8.06	197	8.28	80	<b>200</b>	<b>8.15</b>	195	8.37	203	8.05		
623.xalancbmk_s	80	113	12.6	114	12.5	<b>113</b>	<b>12.5</b>	80	<b>113</b>	<b>12.5</b>	114	12.5	113	12.5		
625.x264_s	80	124	14.3	<b>124</b>	<b>14.2</b>	124	14.2	80	<b>124</b>	<b>14.2</b>	<b>124</b>	<b>14.3</b>	124	14.3		
631.deepsjeng_s	80	263	5.45	263	5.46	<b>263</b>	<b>5.45</b>	80	262	5.46	<b>262</b>	<b>5.46</b>	263	5.45		
641.leela_s	80	<b>358</b>	<b>4.76</b>	359	4.76	358	4.77	80	<b>358</b>	<b>4.76</b>	<b>358</b>	<b>4.77</b>	358	4.77		
648.exchange2_s	80	209	14.1	<b>209</b>	<b>14.1</b>	209	14.0	80	210	14.0	<b>209</b>	<b>14.0</b>	209	14.0		
657.xz_s	80	287	21.6	283	21.8	<b>284</b>	<b>21.7</b>	80	280	22.1	<b>284</b>	<b>21.8</b>	286	21.6		
SPECSpeed2017_int_base = 9.84								SPECSpeed2017_int_peak = 10.0								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

ADDDC setting disabled

Sub NUMA Cluster enabled

Virtualization Technology disabled

DCU Streamer Prefetcher enabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Fri Apr 26 16:55:22 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

**SPECspeed2017\_int\_base = 9.84**

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

**SPECspeed2017\_int\_peak = 10.0**

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
Stepping: 6
CPU MHz: 2109.830
BogoMIPS: 5000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s):
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58
,60,62,64,66,68,70,72,74,76,78
NUMA node1 CPU(s):
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59
,61,63,65,67,69,71,73,75,77,79
```

```
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpq rdt_a avx512f avx512dq rdseed adx
smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqmq_llc cqmq_occu_llc cqmq_mbmm_total cqmq_mbmm_local dtherm ida arat pln pts pku
ospke avx512_vnni flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50
52 54 56 58 60 62 64 66 68 70 72 74 76 78
node 0 size: 191929 MB
node 0 free: 191374 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51
53 55 57 59 61 63 65 67 69 71 73 75 77 79
node 1 size: 193506 MB
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```
node 1 free: 192980 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10

From /proc/meminfo
  MemTotal:      394685728 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Ubuntu 18.04.2 LTS

From /etc/*release* /etc/*version*
  debian_version: buster/sid
  os-release:
    NAME="Ubuntu"
    VERSION="18.04.2 LTS (Bionic Beaver)"
    ID=ubuntu
    ID_LIKE=debian
    PRETTY_NAME="Ubuntu 18.04.2 LTS"
    VERSION_ID="18.04"
    HOME_URL="https://www.ubuntu.com/"
    SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
  Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
  x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:
  CVE-2017-5754 (Meltdown):           Not affected
  CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2):  Mitigation: Enhanced IBRS, IBPB

run-level 3 Apr 26 16:54

SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2        ext4  439G   19G  398G   5%  /


Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Dell Inc. 2.2.2 03/05/2019
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

Memory:

6x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

6x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base,  
peak) 657.xz\_s(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base,  
peak) 641.leela\_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

CXXC 620.omnetpp\_s(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

FC 648.exchange2\_s(base, peak)

=====

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECspeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECSpeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-DSPEC\_SUPPRESS\_OPENMP  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkalloc

623.xalancbmk\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkalloc

631.deepsjeng\_s: Same as 623.xalancbmk\_s

641.leela\_s: Same as 623.xalancbmk\_s

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017\_int\_base = 9.84

PowerEdge M640 (Intel Xeon Gold 6248, 2.50GHz)

SPECSpeed2017\_int\_peak = 10.0

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-26 12:55:22-0400.

Report generated on 2019-06-11 17:19:07 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-11.