SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate2017_int_base = 444

SPECrate2017_int_peak = 463

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

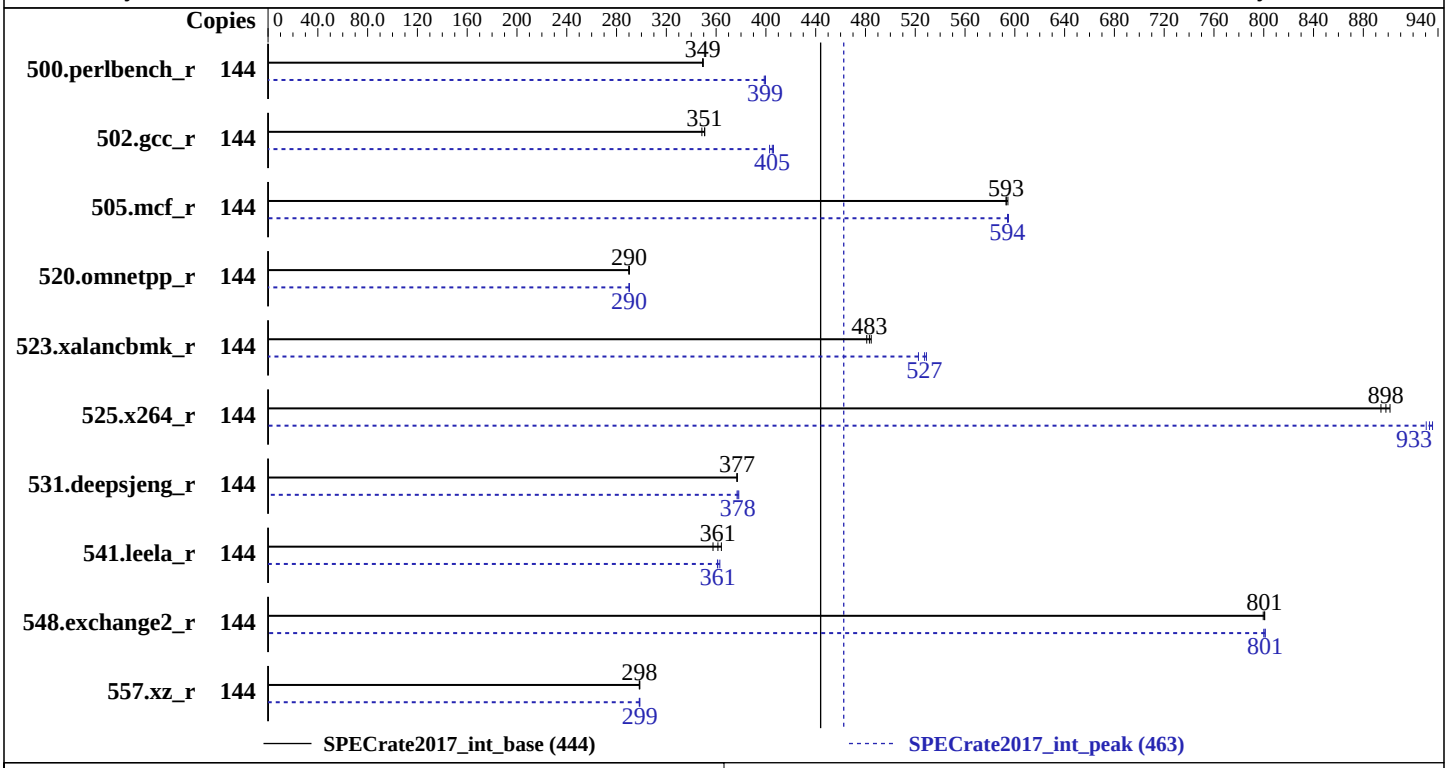

Hardware

CPU Name:	Intel Xeon Gold 6240M
Max MHz.:	3900
Nominal:	2600
Enabled:	72 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (48 x 16 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Ubuntu 18.04.2 LTS kernel 4.15.0-45-generic
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
Parallel:	No
Firmware:	Version 2.2.1 released Feb-2019
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1

SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate2017_int_base = 444

SPECrate2017_int_peak = 463

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	656	349	656	350	**656**	**349**	144	**574**	**399**	575	399	574	400
502.gcc_r	144	**581**	**351**	585	349	581	351	144	**503**	**405**	502	406	506	403
505.mcf_r	144	391	594	**392**	**593**	392	593	144	391	595	392	594	**392**	**594**
520.omnetpp_r	144	652	290	651	290	**651**	**290**	144	651	290	651	290	**651**	**290**
523.xalancbmk_r	144	314	485	**315**	**483**	316	481	144	**288**	**527**	291	523	287	529
525.x264_r	144	282	894	**281**	**898**	280	901	144	**270**	**933**	269	936	271	931
531.deepsjeng_r	144	438	377	**438**	**377**	438	377	144	436	378	438	377	**437**	**378**
541.leela_r	144	667	358	655	364	**660**	**361**	144	**660**	**361**	660	361	657	363
548.exchange2_r	144	471	801	472	800	**471**	**801**	144	**471**	**801**	471	801	472	800
557.xz_r	144	521	299	**521**	**298**	521	298	144	521	299	**521**	**299**	521	298

SPECrate2017_int_base = 444

SPECrate2017_int_peak = 463

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 Transparent Huge Pages enabled by default

 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
ADDDC setting disabled
Sub NUMA Cluster enabled
Virtualization Technology disabled
DCU Streamer Prefetcher disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on intel-sut Tue May 14 21:20:52 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
      4  "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
      Byte Order:            Little Endian
      CPU(s):                144
      On-line CPU(s) list:   0-143
      Thread(s) per core:    2
      Core(s) per socket:    18
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
      Stepping:              7
      CPU MHz:               2910.928
      BogoMIPS:              5200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136
      NUMA node1 CPU(s):     1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137
      NUMA node2 CPU(s):     2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138
      NUMA node3 CPU(s):     3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139
      NUMA node4 CPU(s):     4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140
      NUMA node5 CPU(s):     5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141
      NUMA node6 CPU(s):     6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142
      NUMA node7 CPU(s):     7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs
     ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
     bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx
     smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
     xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku
     ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136
    node 0 size: 95167 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 free: 94905 MB
   node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137
   node 1 size: 96764 MB
   node 1 free: 96516 MB
   node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138
   node 2 size: 96764 MB
   node 2 free: 96536 MB
   node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139
   node 3 size: 96764 MB
   node 3 free: 96540 MB
   node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140
   node 4 size: 96743 MB
   node 4 free: 96190 MB
   node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141
   node 5 size: 96764 MB
   node 5 free: 96541 MB
   node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142
   node 6 size: 96764 MB
   node 6 free: 96541 MB
   node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143
   node 7 size: 96763 MB
   node 7 free: 96566 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  21  21  21  11  21  21  21
     1:  21  10  21  21  21  11  21  21
     2:  21  21  10  21  21  21  11  21
     3:  21  21  21  10  21  21  21  11
     4:  11  21  21  21  10  21  21  21
     5:  21  11  21  21  21  10  21  21
     6:  21  21  11  21  21  21  10  21
     7:  21  21  21  11  21  21  21  10

 From /proc/meminfo
    MemTotal:       791036484 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Ubuntu 18.04.2 LTS

 From /etc/*release* /etc/*version*
    debian_version: buster/sid
    os-release:
       NAME="Ubuntu"
       VERSION="18.04.2 LTS (Bionic Beaver)"
       ID=ubuntu
```


(Continued on next page)

Platform Notes (Continued)

```
       ID_LIKE=debian
       PRETTY_NAME="Ubuntu 18.04.2 LTS"
       VERSION_ID="18.04"
       HOME_URL="https://www.ubuntu.com/"
       SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
    Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB

 run-level 3 May 14 21:19

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  439G   19G  398G   5% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Dell Inc. 2.2.1 02/19/2019
   Memory:
    26x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
    2x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
    1x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
    19x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
CC   502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```


(Continued on next page)

Compiler Version Notes (Continued)

```
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CC   500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
CXXC 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
      peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64 -std=c11`

502.gcc_r: `icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m64`

523.xalancbmk_r: `icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin`

Fortran benchmarks:
`ifort -m64`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-D_FILE_OFFSET_BITS=64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -fno-strict-overflow -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64 -lqkmalloc`

502.gcc_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib -ljemalloc`

505.mcf_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4`

(Continued on next page)

Peak Optimization Flags (Continued)

505.mcf_r (continued):
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-14 17:20:51-0400.
Report generated on 2019-07-09 15:48:45 by CPU2017 PS formatter v6067.
Originally published on 2019-07-09.