SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7542)

SPECrate®2017_fp_base = 190

SPECrate®2017_fp_peak = 207

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

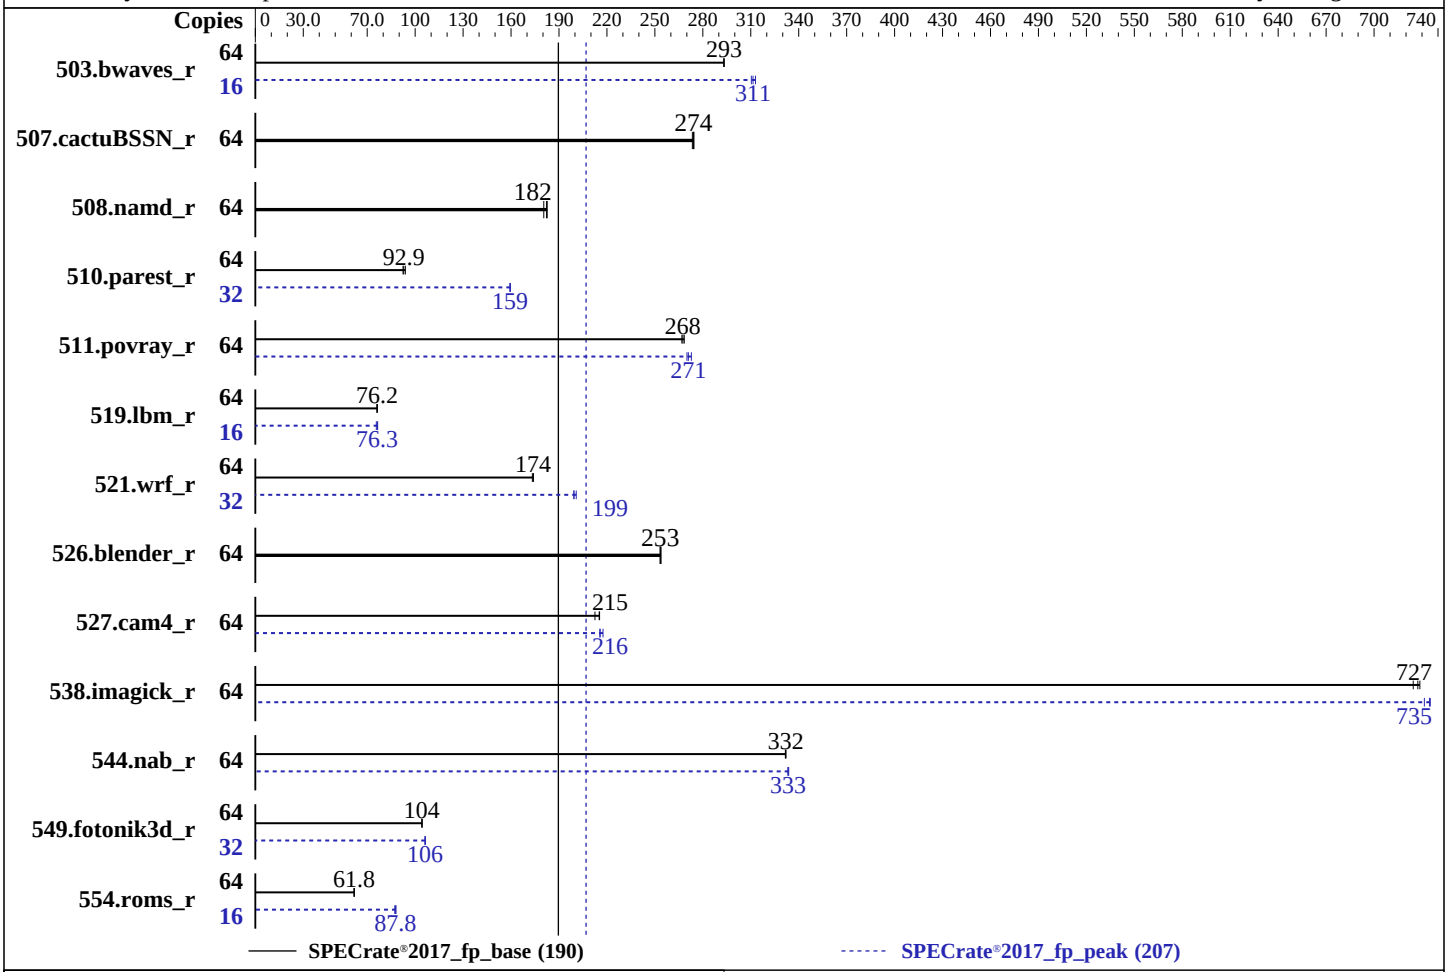

Hardware

CPU Name:	AMD EPYC 7542
Max MHz:	3400
Nominal:	2900
Enabled:	32 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 2 TB SATA III SSD
Other:	None

Software

OS:	Ubuntu 19.04 kernel 5.0.0-25-generic
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	No
Firmware:	Version 1.0 released Jul-2019
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	--

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7542)

SPECrate®2017_fp_base = 190

SPECrate®2017_fp_peak = 207

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	2188	293	2190	293	**2188**	**293**	16	**515**	**311**	517	310	513	313
507.cactuBSSN_r	64	296	273	295	274	**296**	**274**	64	296	273	295	274	**296**	**274**
508.namd_r	64	337	180	**334**	**182**	333	183	64	337	180	**334**	**182**	333	183
510.parest_r	64	1783	93.9	1812	92.4	**1802**	**92.9**	32	525	160	**525**	**159**	525	159
511.povray_r	64	557	268	560	267	**559**	**268**	64	553	270	548	273	**552**	**271**
519.lbm_r	64	884	76.3	**885**	**76.2**	886	76.1	16	220	76.5	223	75.7	**221**	**76.3**
521.wrf_r	64	824	174	827	173	**824**	**174**	32	**360**	**199**	357	201	360	199
526.blender_r	64	**385**	**253**	384	254	385	253	64	**385**	**253**	384	254	385	253
527.cam4_r	64	527	213	**520**	**215**	520	215	64	519	216	515	218	**519**	**216**
538.imagick_r	64	**219**	**727**	220	725	218	729	64	217	735	218	731	**217**	**735**
544.nab_r	64	**324**	**332**	324	332	325	332	64	323	333	**323**	**333**	323	334
549.fotonik3d_r	64	2391	104	2393	104	**2392**	**104**	32	1174	106	1173	106	**1173**	**106**
554.roms_r	64	1645	61.8	1642	61.9	**1645**	**61.8**	16	289	88.0	**290**	**87.8**	291	87.2

SPECrate®2017_fp_base = 190

SPECrate®2017_fp_peak = 207

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
```

(Continued on next page)

Operating System Notes (Continued)

```
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/20190805/ppog-binaries-master/cpu2017/amd_rate_aocc200_rome_B_lib/64;
/root/20190805/ppog-binaries-master/cpu2017/amd_rate_aocc200_rome_B_lib/32:"
MALLOC_CONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
APBDIS = 1
NUMA Nodes Per Socket = NPS4
 Sysinfo program /root/20190805/ppog-binaries-master/cpu2017/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on sys2-bravo Fri Aug 30 01:53:20 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7542 32-Core Processor
       1  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)

Platform Notes (Continued)

```
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31

  From lscpu:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       Address sizes:       43 bits physical, 48 bits virtual
       CPU(s):              64
       On-line CPU(s) list: 0-63
       Thread(s) per core:  2
       Core(s) per socket:  32
       Socket(s):           1
       NUMA node(s):        4
       Vendor ID:           AuthenticAMD
       CPU family:          23
       Model:               49
       Model name:          AMD EPYC 7542 32-Core Processor
       Stepping:            0
       CPU MHz:             3353.192
       CPU max MHz:         2900.0000
       CPU min MHz:         1500.0000
       BogoMIPS:            5799.80
       Virtualization:      AMD-V
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            512K
       L3 cache:            16384K
       NUMA node0 CPU(s):   0-7,32-39
       NUMA node1 CPU(s):   8-15,40-47
       NUMA node2 CPU(s):   16-23,48-55
       NUMA node3 CPU(s):   24-31,56-63
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
       constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
       pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
      smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
      wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
      decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
      overflow_recov succor smca
```

(Continued on next page)

Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
   node 0 size: 128866 MB
   node 0 free: 127704 MB
   node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
   node 1 size: 129011 MB
   node 1 free: 128469 MB
   node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
   node 2 size: 129011 MB
   node 2 free: 128531 MB
   node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
   node 3 size: 128997 MB
   node 3 free: 128028 MB
   node distances:
   node   0   1   2   3
     0:  10  12  12  12
     1:  12  10  12  12
     2:  12  12  10  12
     3:  12  12  12  10

 From /proc/meminfo
    MemTotal:       528267728 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Ubuntu 19.04

 From /etc/*release* /etc/*version*
    debian_version: buster/sid
    os-release:
       NAME="Ubuntu"
       VERSION="19.04 (Disco Dingo)"
       ID=ubuntu
       ID_LIKE=debian
       PRETTY_NAME="Ubuntu 19.04"
       VERSION_ID="19.04"
       HOME_URL="https://www.ubuntu.com/"
       SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux sys2-bravo 5.0.0-25-generic #26-Ubuntu SMP Thu Aug 1 12:04:58 UTC 2019 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and __user
 pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
 IBRS_FW, STIBP: conditional, RSB filling

 run-level 5 Aug 29 18:13

 SPEC is set to: /root/20190805/ppog-binaries-master/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      ext4  1.8T   15G  1.7T   1% /

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS American Megatrends Inc. 1.0 07/19/2019
   Memory:
    8x SK Hynix HMAA8GR7AJR4N-XN 64 kB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```


(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both C and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r (continued):
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:

503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both C and C++:

511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r (continued):
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-30 04:53:19-0400.
Report generated on 2019-09-17 16:14:38 by CPU2017 PS formatter v6255.
Originally published on 2019-09-17.