SPEC CPU®2017 Floating Point Rate Result

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_fp_base = 342

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Aug-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

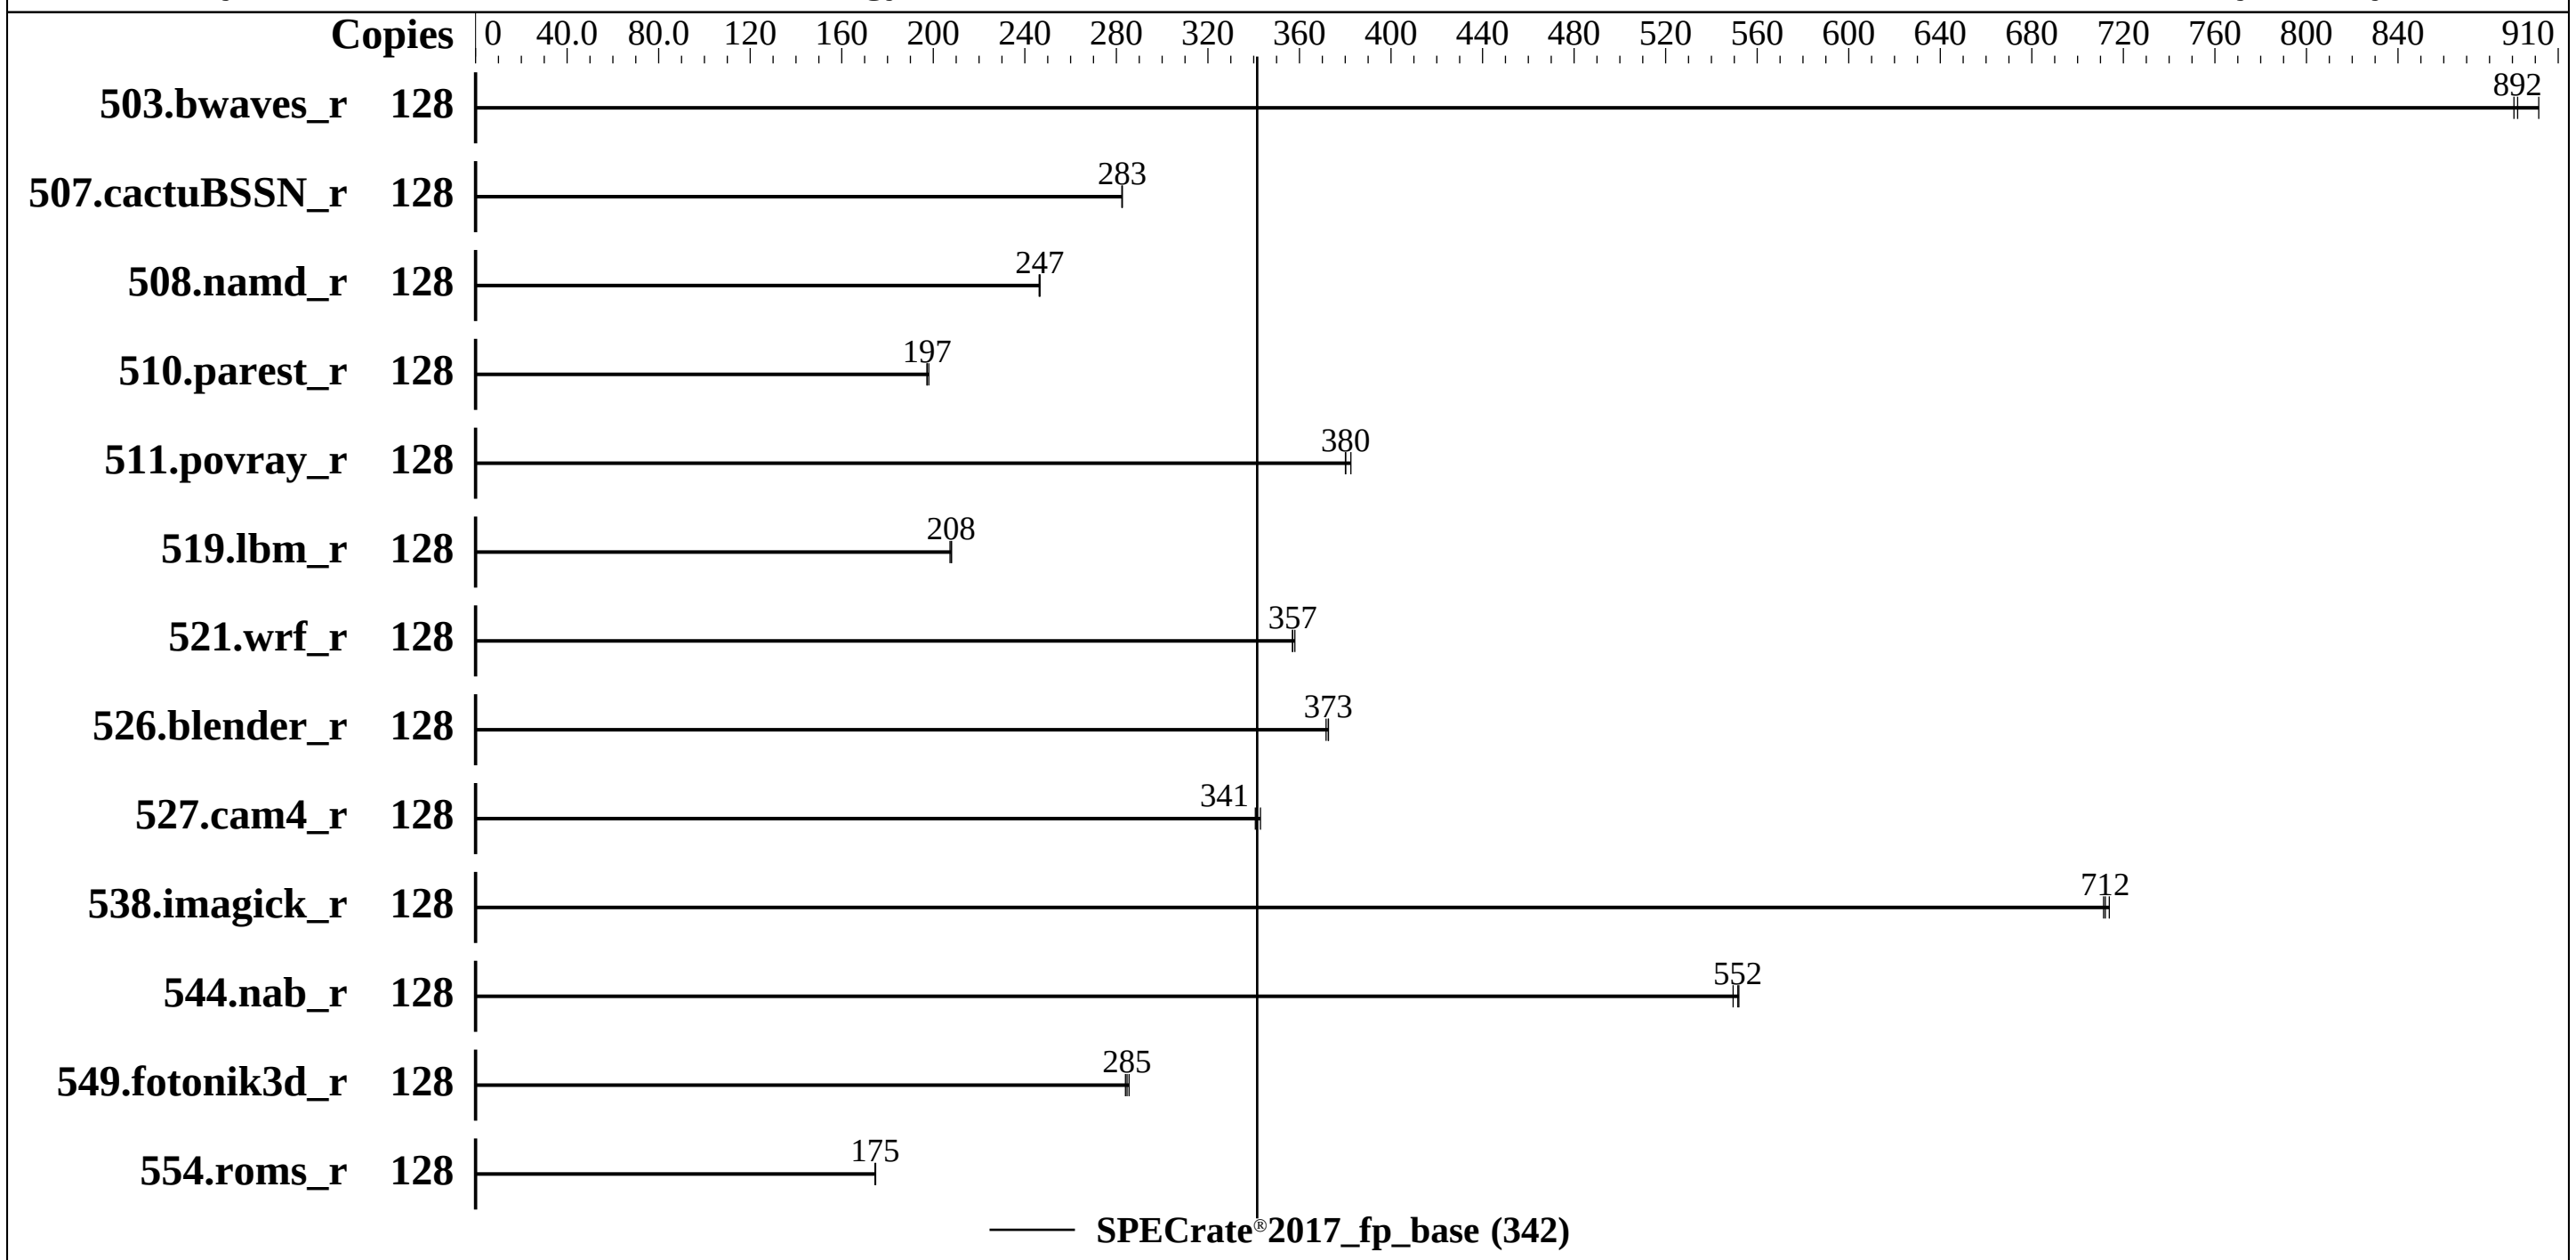

Hardware

CPU Name:	Intel Xeon Gold 5218T
Max MHz:	3800
Nominal:	2100
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,3,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	1 x 800 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) Kernel 4.12.14-25.13-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version PSE122R 1.53 released Aug-2019 tested as PSE121R 1.53 Jul-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	--

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_fp_base = 342

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Aug-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1424	902	1441	891	**1439**	**892**							
507.cactuBSSN_r	128	**574**	**283**	574	283	574	282							
508.namd_r	128	493	247	**493**	**247**	494	246							
510.parest_r	128	1691	198	1698	197	**1697**	**197**							
511.povray_r	128	**786**	**380**	786	380	781	382							
519.lbm_r	128	651	207	**649**	**208**	649	208							
521.wrf_r	128	803	357	**803**	**357**	801	358							
526.blender_r	128	**523**	**373**	523	373	525	372							
527.cam4_r	128	**656**	**341**	657	341	653	343							
538.imagick_r	128	**447**	**712**	448	711	446	714							
544.nab_r	128	392	549	**391**	**552**	390	552							
549.fotonik3d_r	128	1747	286	1757	284	**1752**	**285**							
554.roms_r	128	1165	175	**1164**	**175**	1164	175							

SPECrate®2017_fp_base = 342

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Choose Operating Mode set to Custom Mode
Intel Virtualization Technology set to Disable
MONITOR/MWAIT set to Enable
SNC set to Enable
 Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-i7o2 Tue Aug 27 18:16:08 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5218T CPU @ 2.10GHz
       4  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              128
      On-line CPU(s) list: 0-127
      Thread(s) per core:  2
```

(Continued on next page)

Platform Notes (Continued)

```
      Core(s) per socket:  16
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 5218T CPU @ 2.10GHz
      Stepping:            7
      CPU MHz:             2100.000
      CPU max MHz:         3800.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            4200.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            22528K
      NUMA node0 CPU(s):   0-3,8-11,64-67,72-75
      NUMA node1 CPU(s):   4-7,12-15,68-71,76-79
      NUMA node2 CPU(s):   16-19,24-27,80-83,88-91
      NUMA node3 CPU(s):   20-23,28-31,84-87,92-95
      NUMA node4 CPU(s):   32-35,40-43,96-99,104-107
      NUMA node5 CPU(s):   36-39,44-47,100-103,108-111
      NUMA node6 CPU(s):   48-51,56-59,112-115,120-123
      NUMA node7 CPU(s):   52-55,60-63,116-119,124-127
      Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
      avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 22528 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
   node 0 size: 193116 MB
   node 0 free: 192446 MB
   node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
```

(Continued on next page)

Platform Notes (Continued)

```
    node 1 size: 193525 MB
    node 1 free: 190086 MB
    node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
    node 2 size: 193525 MB
    node 2 free: 193363 MB
    node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
    node 3 size: 193525 MB
    node 3 free: 193374 MB
    node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
    node 4 size: 193525 MB
    node 4 free: 193335 MB
    node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
    node 5 size: 193496 MB
    node 5 free: 193306 MB
    node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
    node 6 size: 193525 MB
    node 6 free: 193362 MB
    node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
    node 7 size: 193522 MB
    node 7 free: 193306 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  31  31  21  21  21  21
      1:  11  10  31  31  21  21  21  21
      2:  31  31  10  11  21  21  21  21
      3:  31  31  11  10  21  21  21  21
      4:  21  21  21  21  10  11  31  31
      5:  21  21  21  21  11  10  31  31
      6:  21  21  21  21  31  31  10  11
      7:  21  21  21  21  31  31  11  10

  From /proc/meminfo
     MemTotal:       1584909048 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15"
        VERSION_ID="15"
        PRETTY_NAME="SUSE Linux Enterprise Server 15"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15"
```

(Continued on next page)

Platform Notes (Continued)

```
 uname -a:
    Linux linux-i7o2 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
 IBPB, IBRS_FW

 run-level 3 Aug 27 18:13

 SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda2      btrfs  742G   57G  685G   8% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS Lenovo -[PSE121R-1.53]- 07/03/2019
   Memory:
    48x NO DIMM NO DIMM
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-27 06:16:07-0400.
Report generated on 2019-09-17 16:13:55 by CPU2017 PS formatter v6255.
Originally published on 2019-09-17.