SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R5300 (Intel Xeon Gold 6148)

SPECrate®2017_fp_base = 203

SPECrate®2017_fp_peak = 215

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

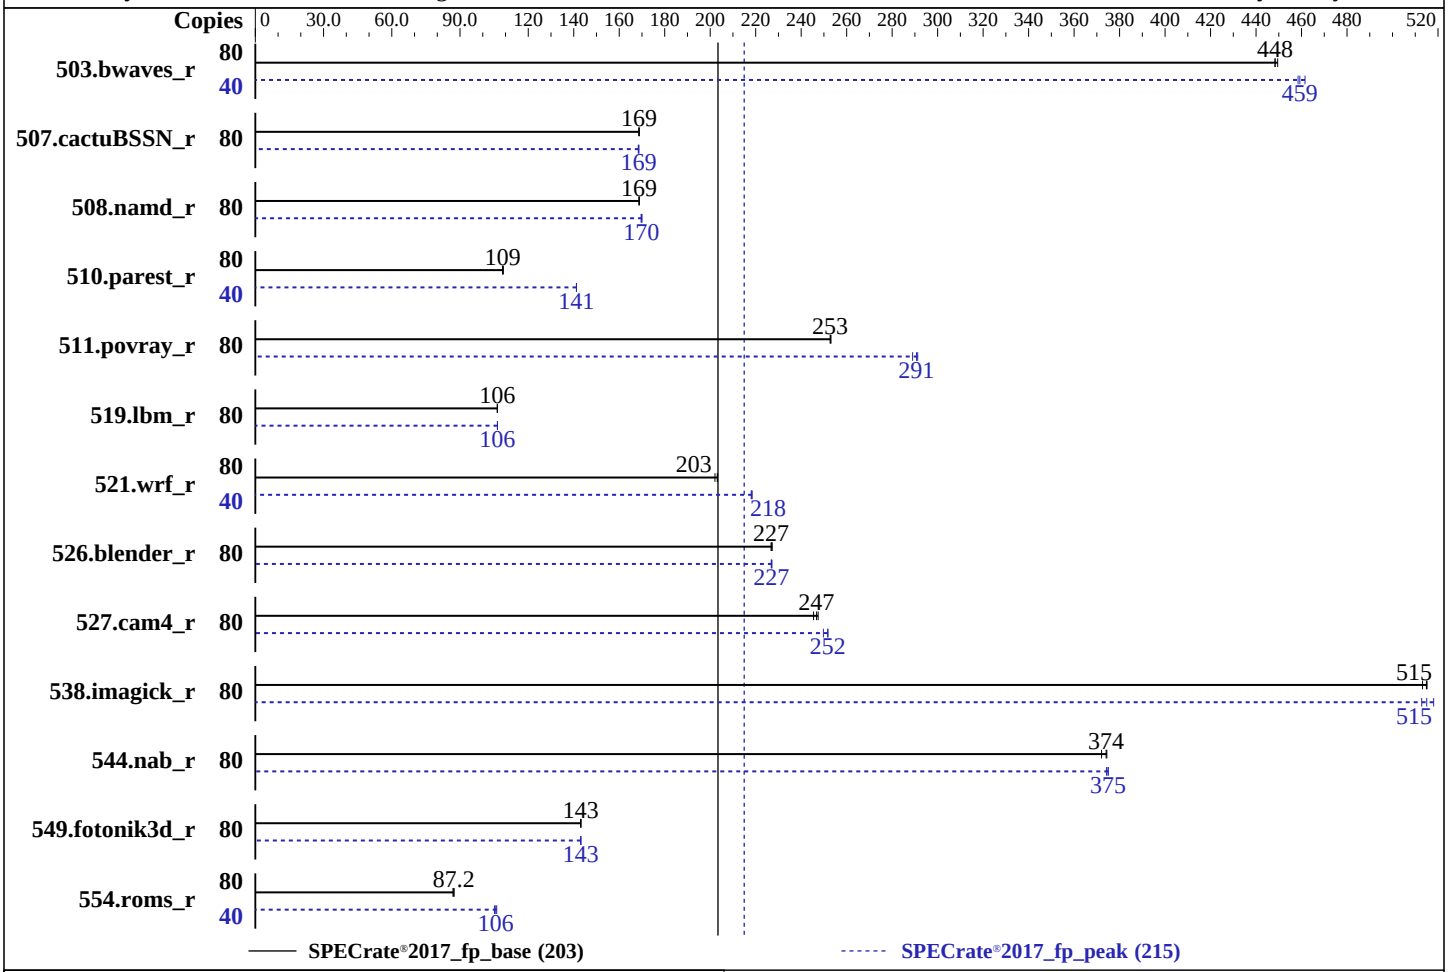

Hardware

CPU Name:	Intel Xeon Gold 6148
Max MHz:	3700
Nominal:	2400
Enabled:	40 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)
Storage:	1 x 1TB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 2.00.33 released Aug-2019 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	--

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R5300 (Intel Xeon Gold 6148)

SPECrate®2017_fp_base = 203

SPECrate®2017_fp_peak = 215

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2019
Hardware Availability: Jun-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1789	448	1785	450	**1789**	**448**	40	869	462	**873**	**459**	875	458
507.cactuBSSN_r	80	600	169	**600**	**169**	601	169	80	**601**	**169**	601	169	602	168
508.namd_r	80	451	169	**450**	**169**	450	169	80	447	170	448	170	**448**	**170**
510.parest_r	80	**1924**	**109**	1925	109	1919	109	40	741	141	**741**	**141**	741	141
511.povray_r	80	738	253	**739**	**253**	739	253	80	**643**	**291**	646	289	641	291
519.lbm_r	80	**792**	**106**	793	106	792	106	80	792	106	**792**	**106**	792	106
521.wrf_r	80	882	203	**882**	**203**	887	202	40	**410**	**218**	411	218	410	218
526.blender_r	80	**537**	**227**	537	227	536	227	80	537	227	536	227	**537**	**227**
527.cam4_r	80	565	247	**567**	**247**	570	245	80	560	250	556	252	**556**	**252**
538.imagick_r	80	**386**	**515**	388	513	386	515	80	384	518	**386**	**515**	388	513
544.nab_r	80	**360**	**374**	360	374	362	372	80	**359**	**375**	360	374	359	375
549.fotonik3d_r	80	2178	143	2179	143	**2179**	**143**	80	2179	143	2178	143	**2179**	**143**
554.roms_r	80	1455	87.4	**1457**	**87.2**	1463	86.9	40	605	105	599	106	**601**	**106**

SPECrate®2017_fp_base = 203

SPECrate®2017_fp_peak = 215

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS Settings:
 Set SNC to Enabled
 Set IMC Interleaving to 1-way Interleave
 Set DCU Streamer Prefetch to Disabled
 Set XPT Prefetch to Enabled
 Set Package C state to No limit
 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on localhost.localdomain Fri Sep  6 02:52:38 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
       2  "physical id"s (chips)
       80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                80
      On-line CPU(s) list:   0-79
      Thread(s) per core:    2
      Core(s) per socket:    20
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
```

(Continued on next page)

Platform Notes (Continued)

```
      Stepping:              4
      CPU MHz:               999.902
      CPU max MHz:           3700.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4800.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              28160K
      NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
      NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
      NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
      NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
      intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_l1d

  /proc/cpuinfo cache data
     cache size : 28160 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
    node 0 size: 47769 MB
    node 0 free: 46019 MB
    node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
    node 1 size: 49152 MB
    node 1 free: 47735 MB
    node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
    node 2 size: 49152 MB
    node 2 free: 47862 MB
    node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
    node 3 size: 49152 MB
    node 3 free: 47680 MB
    node distances:
    node   0   1   2   3
      0:  10  11  21  21
```


(Continued on next page)

Platform Notes (Continued)

```
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

  From /proc/meminfo
     MemTotal:       196457868 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.6 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VARIANT="Server"
        VARIANT_ID="server"
        VERSION_ID="7.6"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
     redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2017-5754 (Meltdown):          Mitigation: PTI
  CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

  run-level 3 Sep 6 02:35

  SPEC is set to: /home/speccpu
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   876G   72G  805G   9% /home

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    BIOS American Megatrends Inc. 2.00.33 08/22/2019
    Memory:
     12x Hynix HMA82GR7AFR8N-VK 16 GB 2 rank 2666
     12x NO DIMM NO DIMM
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Fortran benchmarks:

503.bwaves_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.00.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-06 02:52:37-0400.
Report generated on 2019-10-01 14:11:26 by CPU2017 PS formatter v6255.
Originally published on 2019-10-01.