SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_int_base = 484

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

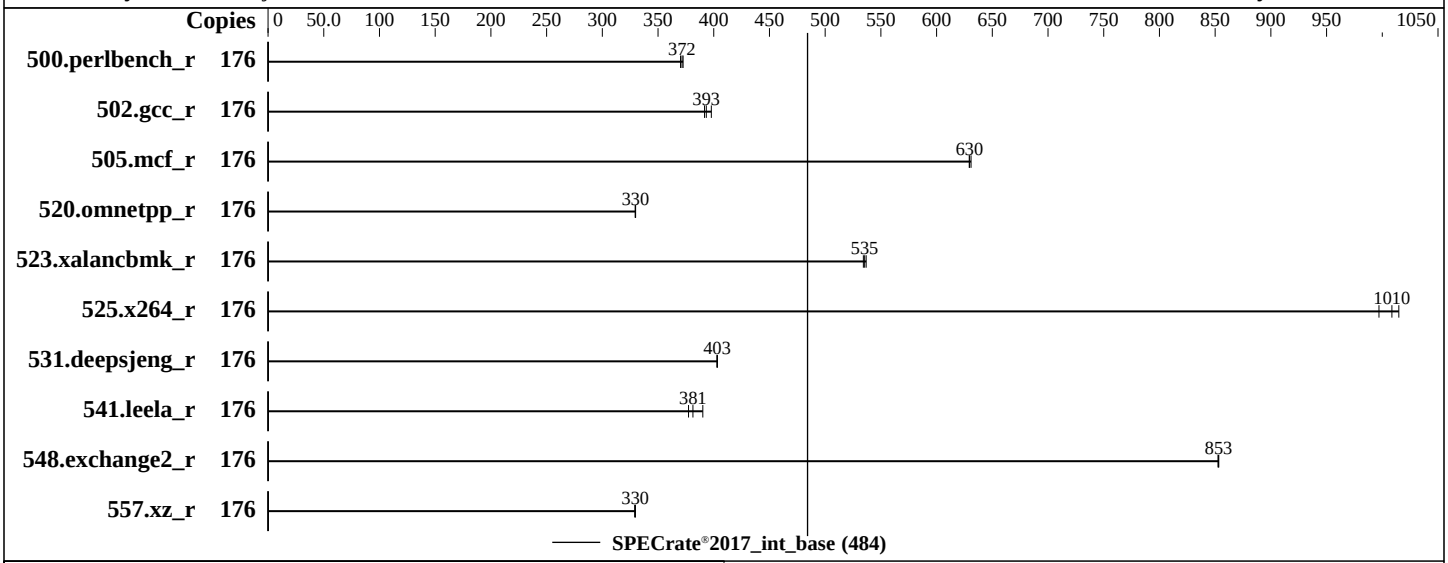

Hardware

CPU Name:	Intel Xeon Gold 6238
Max MHz:	3700
Nominal:	2100
Enabled:	88 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	30.25 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x SATA M.2 SSD, 480 GB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 4.12.14-25.28-default
Compiler:	C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Fujitsu BIOS for D3753-C1x Version V5.0.0.14 R1.8.0 released Jun-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	--

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 6238, 2.10GHz

SPECrate®2017_int_base = 484

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	752	372	**754**	**372**	757	370							
502.gcc_r	176	626	398	636	392	**634**	**393**							
505.mcf_r	176	**452**	**630**	451	631	452	629							
520.omnetpp_r	176	**700**	**330**	700	330	701	330							
523.xalancbmk_r	176	348	534	346	537	**347**	**535**							
525.x264_r	176	309	997	**306**	**1010**	304	1010							
531.deepsjeng_r	176	500	403	501	403	**500**	**403**							
541.leela_r	176	**764**	**381**	747	390	772	377							
548.exchange2_r	176	**541**	**853**	540	853	541	853							
557.xz_r	176	577	330	578	329	**577**	**330**							

SPECrate®2017_int_base = **484**

SPECrate®2017_int_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-175
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS configuration:
 DCU Streamer Prefetcher = Disabled
 Fan Control = Full
 Energy Performance = Performance
 HWPM = Native Mode with no legacy
 LLC Prefetcher = Disable
 Override OS Energy Performance = Enable
 Patrol Scrub  = Disabled
 WR CRC feature Control = Disabled
 XPT Prefetch = Enable
 Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-z2gf Thu Jun 21 22:39:36 2018

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
       4  "physical id"s (chips)
       176 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 22
       siblings  : 44
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
       physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
       physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              176
      On-line CPU(s) list: 0-175
      Thread(s) per core:  2
      Core(s) per socket:  22
```

(Continued on next page)

Platform Notes (Continued)

```
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
      Stepping:              7
      CPU MHz:               2100.000
      CPU max MHz:           3700.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              30976K
      NUMA node0 CPU(s):     0-2,6-8,11-13,17,18,88-90,94-96,99-101,105,106
      NUMA node1 CPU(s):     3-5,9,10,14-16,19-21,91-93,97,98,102-104,107-109
      NUMA node2 CPU(s):     22-24,28-30,33-35,39,40,110-112,116-118,121-123,127,128
      NUMA node3 CPU(s):     25-27,31,32,36-38,41-43,113-115,119,120,124-126,129-131
      NUMA node4 CPU(s):     44-46,50-52,55-57,61,62,132-134,138-140,143-145,149,150
      NUMA node5 CPU(s):     47-49,53,54,58-60,63-65,135-137,141,142,146-148,151-153
      NUMA node6 CPU(s):     66-68,72-74,77-79,83,84,154-156,160-162,165-167,171,172
      NUMA node7 CPU(s):     69-71,75,76,80-82,85-87,157-159,163,164,168-170,173-175
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
      ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 30976 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 6 7 8 11 12 13 17 18 88 89 90 94 95 96 99 100 101 105 106
    node 0 size: 191854 MB
    node 0 free: 188502 MB
    node 1 cpus: 3 4 5 9 10 14 15 16 19 20 21 91 92 93 97 98 102 103 104 107 108 109
```

(Continued on next page)

Platform Notes (Continued)

```
   node 1 size: 193531 MB
   node 1 free: 193222 MB
   node 2 cpus: 22 23 24 28 29 30 33 34 35 39 40 110 111 112 116 117 118 121 122 123 127
   128
   node 2 size: 193531 MB
   node 2 free: 193317 MB
   node 3 cpus: 25 26 27 31 32 36 37 38 41 42 43 113 114 115 119 120 124 125 126 129 130
   131
   node 3 size: 193531 MB
   node 3 free: 193346 MB
   node 4 cpus: 44 45 46 50 51 52 55 56 57 61 62 132 133 134 138 139 140 143 144 145 149
   150
   node 4 size: 193531 MB
   node 4 free: 193321 MB
   node 5 cpus: 47 48 49 53 54 58 59 60 63 64 65 135 136 137 141 142 146 147 148 151 152
   153
   node 5 size: 193531 MB
   node 5 free: 193256 MB
   node 6 cpus: 66 67 68 72 73 74 77 78 79 83 84 154 155 156 160 161 162 165 166 167 171
   172
   node 6 size: 193531 MB
   node 6 free: 193320 MB
   node 7 cpus: 69 70 71 75 76 80 81 82 85 86 87 157 158 159 163 164 168 169 170 173 174
   175
   node 7 size: 193312 MB
   node 7 free: 192674 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  21  21
     1:  11  10  21  21  21  21  21  21
     2:  21  21  10  11  21  21  21  21
     3:  21  21  11  10  21  21  21  21
     4:  21  21  21  21  10  11  21  21
     5:  21  21  21  21  11  10  21  21
     6:  21  21  21  21  21  21  10  11
     7:  21  21  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       1583469544 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15"
       VERSION_ID="15"
```


(Continued on next page)

Platform Notes (Continued)

```
       PRETTY_NAME="SUSE Linux Enterprise Server 15"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15"

 uname -a:
    Linux linux-z2gf 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2017-5754 (Meltdown):          Not affected
 CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
 filling

 run-level 3 Jun 21 22:37

 SPEC is set to: /home/Benchmark/speccpu2017-int
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/sda2      btrfs  445G   46G  399G  11% /home

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.8.0 for D3753-C1x
       06/06/2019
   Memory:
    33x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
    15x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
         | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2018-06-21 09:39:35-0400.
Report generated on 2019-10-01 14:31:36 by CPU2017 PS formatter v6255.
Originally published on 2019-10-01.