SPEC CPU®2017 Integer Rate Result

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_int_base = 349

SPECrate®2017_int_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Oct-2019
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Jul-2019
Tested by:	Lenovo Global Technology	**Software Availability:**	May-2019

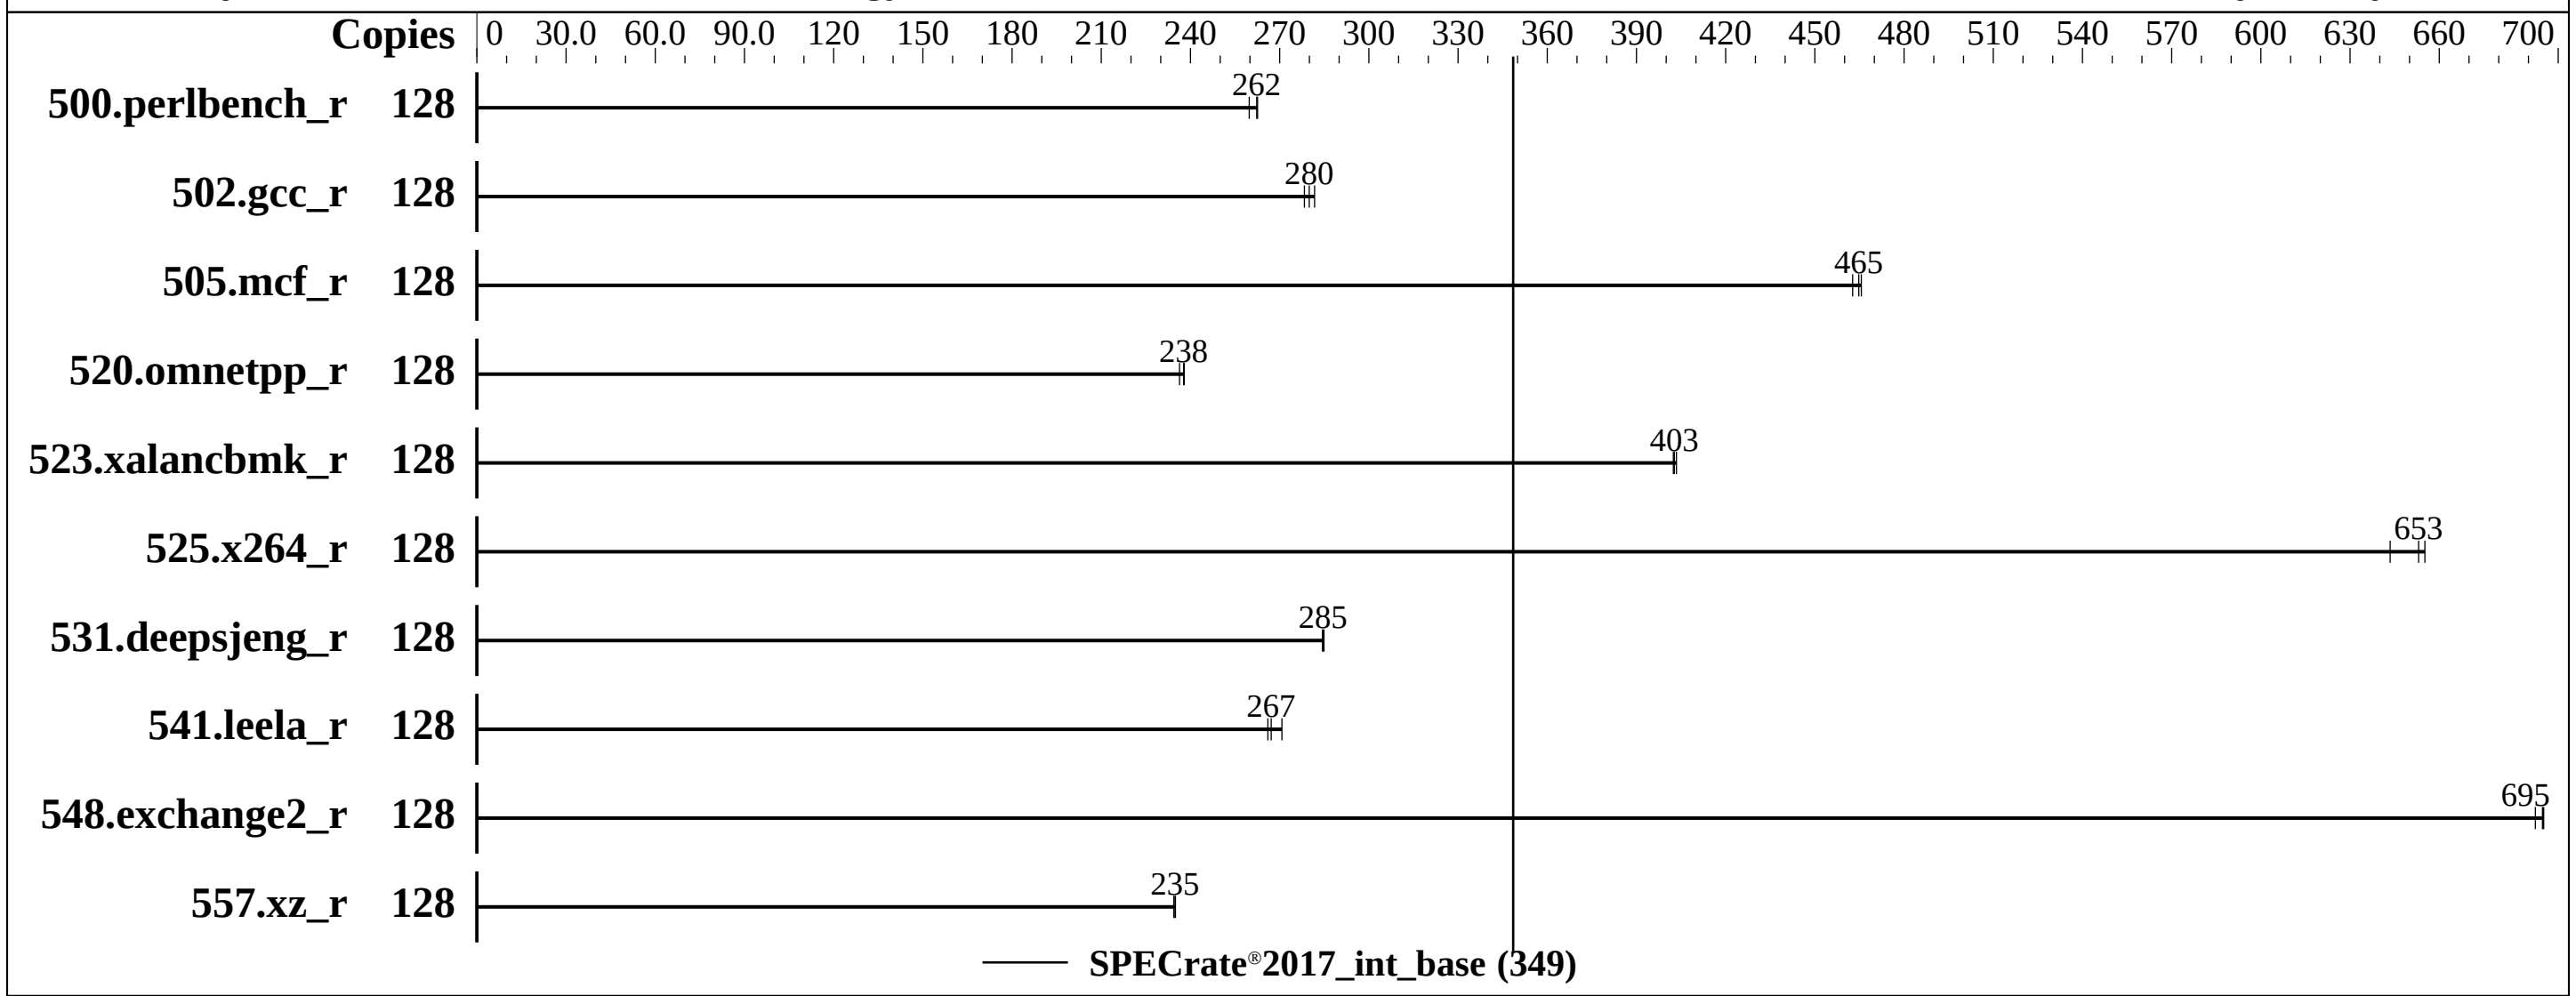

Hardware

CPU Name:	Intel Xeon Gold 5218T
Max MHz:	3800
Nominal:	2100
Enabled:	64 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	800 GB tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	--

Lenovo Global Technology
ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_int_base = 349
SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Oct-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
500.perlbench_r	128	784	260	776	263	**777**	**262**							
502.gcc_r	128	**647**	**280**	643	282	651	278							
505.mcf_r	128	447	463	444	466	**445**	**465**							
520.omnetpp_r	128	706	238	711	236	**707**	**238**							
523.xalancbmk_r	128	**336**	**403**	336	402	335	403							
525.x264_r	128	**343**	**653**	342	655	348	643							
531.deepsjeng_r	128	**516**	**285**	516	284	515	285							
541.leela_r	128	797	266	783	271	**793**	**267**							
548.exchange2_r	128	482	695	484	692	**483**	**695**							
557.xz_r	128	**589**	**235**	588	235	590	234							

SPECrate®2017_int_base = 349
SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
 mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
 echo 50000     > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
 echo 240000000 > /proc/sys/kernel/sched_latency_ns
 echo 5000000   > /proc/sys/kernel/sched_migration_cost_ns
 echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
 echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
 echo 0 > /proc/sys/kernel/numa_balancing
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
```

(Continued on next page)

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_int_base = 349

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Oct-2019
Hardware Availability: Jul-2019
Software Availability: May-2019

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Trusted Execution Technology set to Enable
SNC set to Enable
 Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
 running on linux-qcq6 Mon Oct 14 10:55:29 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5218T CPU @ 2.10GHz
       4  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
```

(Continued on next page)

Platform Notes (Continued)

```
     CPU(s):                128
     On-line CPU(s) list:   0-127
     Thread(s) per core:    2
     Core(s) per socket:    16
     Socket(s):             4
     NUMA node(s):          8
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 85
     Model name:            Intel(R) Xeon(R) Gold 5218T CPU @ 2.10GHz
     Stepping:              7
     CPU MHz:               2100.000
     CPU max MHz:           3800.0000
     CPU min MHz:           1000.0000
     BogoMIPS:              4200.00
     Virtualization:        VT-x
     L1d cache:             32K
     L1i cache:             32K
     L2 cache:              1024K
     L3 cache:              22528K
     NUMA node0 CPU(s):     0-3,8-11,64-67,72-75
     NUMA node1 CPU(s):     4-7,12-15,68-71,76-79
     NUMA node2 CPU(s):     16-19,24-27,80-83,88-91
     NUMA node3 CPU(s):     20-23,28-31,84-87,92-95
     NUMA node4 CPU(s):     32-35,40-43,96-99,104-107
     NUMA node5 CPU(s):     36-39,44-47,100-103,108-111
     NUMA node6 CPU(s):     48-51,56-59,112-115,120-123
     NUMA node7 CPU(s):     52-55,60-63,116-119,124-127
     Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
     pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
     rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
     intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
     tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
     rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
     xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
     pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 22528 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 size: 193136 MB
   node 0 free: 192822 MB
   node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
   node 1 size: 193498 MB
   node 1 free: 193078 MB
   node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
   node 2 size: 193527 MB
   node 2 free: 193273 MB
   node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
   node 3 size: 193527 MB
   node 3 free: 180610 MB
   node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
   node 4 size: 193527 MB
   node 4 free: 193286 MB
   node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
   node 5 size: 193527 MB
   node 5 free: 193305 MB
   node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
   node 6 size: 193527 MB
   node 6 free: 193327 MB
   node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
   node 7 size: 193525 MB
   node 7 free: 193311 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  31  31
     1:  11  10  21  21  21  21  31  31
     2:  21  21  10  11  31  31  21  21
     3:  21  21  11  10  31  31  21  21
     4:  21  21  31  31  10  11  21  21
     5:  21  21  31  31  11  10  21  21
     6:  31  31  21  21  21  21  10  11
     7:  31  31  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       1584946172 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
```

(Continued on next page)

Platform Notes (Continued)

```
      NAME="SLES"
      VERSION="12-SP4"
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux linux-qcq6 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Oct 14 10:52

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  800G  8.3G  792G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[IVE141E-2.30]- 07/02/2019
  Memory:
   48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_int_base = 349

SPECrate®2017_int_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Oct-2019
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Jul-2019
Tested by:	Lenovo Global Technology	**Software Availability:**	May-2019

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Lenovo Global Technology

ThinkSystem SN850
(2.10 GHz, Intel Xeon Gold 5218T)

SPECrate®2017_int_base = 349

SPECrate®2017_int_peak = Not Run

CPU2017 License:	9017	**Test Date:**	Oct-2019
Test Sponsor:	Lenovo Global Technology	**Hardware Availability:**	Jul-2019
Tested by:	Lenovo Global Technology	**Software Availability:**	May-2019

Base Optimization Flags

C benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:
```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-13 22:55:28-0400.
Report generated on 2019-10-29 16:13:19 by CPU2017 PS formatter v6255.
Originally published on 2019-10-29.