



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

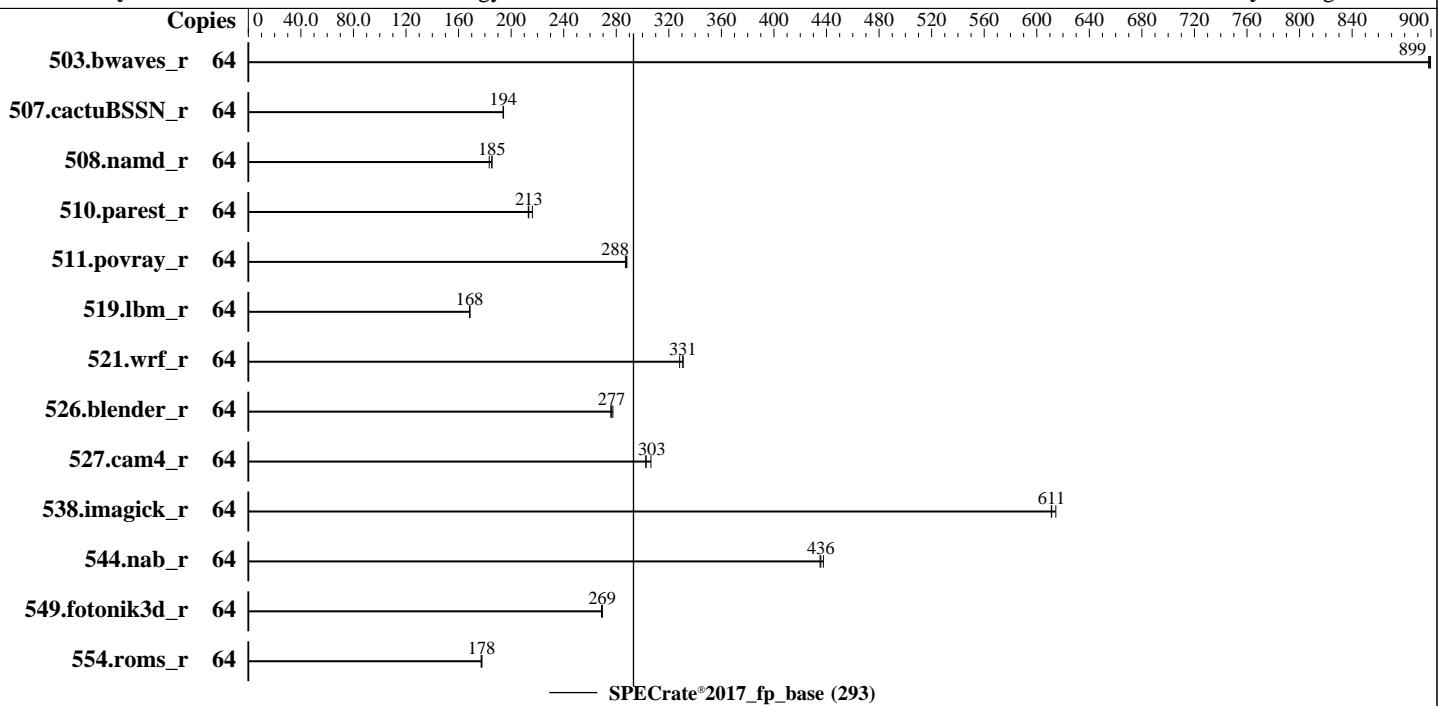

### Hardware

CPU Name: Intel Xeon Gold 6244  
Max MHz: 4400  
Nominal: 3600  
Enabled: 32 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 24.75 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### OS:

Red Hat Enterprise Linux Server release 7.6 (Maipo)

Kernel 3.10.0-957.el7.x86\_64

### Compiler:

C/C++: Version 19.0.4.227 of Intel

C/C++

Compiler for Linux;

Fortran: Version 19.0.4.227 of

Intel Fortran

Compiler for Linux

No

Lenovo BIOS Version IVE142E 2.30 released Aug-2019 tested as IVE141E 2.30 Jul-2019

### Parallel:

xfs

### Firmware:

Run level 3 (multi-user)

### File System:

64-bit

### System State:

Not Applicable

### Base Pointers:

None

### Peak Pointers:

None

### Other:

None

### Power Management:

Disable

### Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	713	900	<b>714</b>	<b>899</b>	715	898									
507.cactusBSSN_r	64	418	194	<b>418</b>	<b>194</b>	417	194									
508.namd_r	64	332	183	<b>328</b>	<b>185</b>	328	185									
510.parest_r	64	775	216	<b>784</b>	<b>213</b>	786	213									
511.povray_r	64	519	288	521	287	<b>520</b>	<b>288</b>									
519.lbm_r	64	<b>401</b>	<b>168</b>	400	169	401	168									
521.wrf_r	64	433	331	437	328	<b>434</b>	<b>331</b>									
526.blender_r	64	<b>353</b>	<b>277</b>	351	277	353	276									
527.cam4_r	64	365	306	370	302	<b>370</b>	<b>303</b>									
538.imagick_r	64	260	611	<b>260</b>	<b>611</b>	259	614									
544.nab_r	64	248	435	246	438	<b>247</b>	<b>436</b>									
549.fotonik3d_r	64	928	269	<b>926</b>	<b>269</b>	926	269									
554.roms_r	64	574	177	572	178	<b>573</b>	<b>178</b>									

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

LLC dead line alloc set to Disable

```
Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Fri Oct 25 05:35:02 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 4 8 17 18 19 24 25 27
physical 1: cores 2 3 4 8 17 20 24 26
physical 2: cores 2 4 9 20 24 25 26 27
physical 3: cores 2 3 17 18 19 20 24 25
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6244 CPU @ 3.60GHz
Stepping: 6
CPU MHz: 3600.000
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,2,5,6,33,34,37,38
NUMA node1 CPU(s): 1,3,4,7,32,35,36,39
NUMA node2 CPU(s): 8,11,12,14,40,43,44,46
NUMA node3 CPU(s): 9,10,13,15,41,42,45,47
NUMA node4 CPU(s): 16,18,20,21,48,50,52,53
NUMA node5 CPU(s): 17,19,22,23,49,51,54,55
NUMA node6 CPU(s): 24,26,30,31,56,58,62,63
NUMA node7 CPU(s): 25,27-29,57,59-61
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin intel_pt ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_ll1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 2 5 6 33 34 37 38
node 0 size: 97973 MB
node 0 free: 95647 MB
node 1 cpus: 1 3 4 7 32 35 36 39
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 1 size: 98304 MB
node 1 free: 96025 MB
node 2 cpus: 8 11 12 14 40 43 44 46
node 2 size: 98304 MB
node 2 free: 96057 MB
node 3 cpus: 9 10 13 15 41 42 45 47
node 3 size: 98304 MB
node 3 free: 95491 MB
node 4 cpus: 16 18 20 21 48 50 52 53
node 4 size: 98304 MB
node 4 free: 96075 MB
node 5 cpus: 17 19 22 23 49 51 54 55
node 5 size: 98304 MB
node 5 free: 96045 MB
node 6 cpus: 24 26 30 31 56 58 62 63
node 6 size: 98304 MB
node 6 free: 96076 MB
node 7 cpus: 25 27 28 29 57 59 60 61
node 7 size: 98304 MB
node 7 free: 96049 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      792235420 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS

```
run-level 3 Oct 25 05:33
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	839G	52G	788G	7%	/home

```
From /sys/devices/virtual/dmi/id
```

BIOS:	Lenovo -[IVE141E-2.30]-	07/02/2019
Vendor:	Lenovo	
Product:	Lenovo ThinkSystem SN850	-[7X15NVz000]-
Serial:	1234567890	

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base) 510.parest\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(3.60 GHz, Intel Xeon Gold 6244)

SPECrate®2017\_fp\_base = 293

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-24 17:35:02-0400.

Report generated on 2019-11-12 14:58:44 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.