



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

**SPECrate®2017\_fp\_base = 88.9**

**SPECrate®2017\_fp\_peak = 89.7**

CPU2017 License: 006042


**Test Date:** Oct-2019

**Test Sponsor:** Netweb Pte Ltd

**Hardware Availability:** Sep-2019

**Tested by:** Netweb

**Software Availability:** Aug-2019

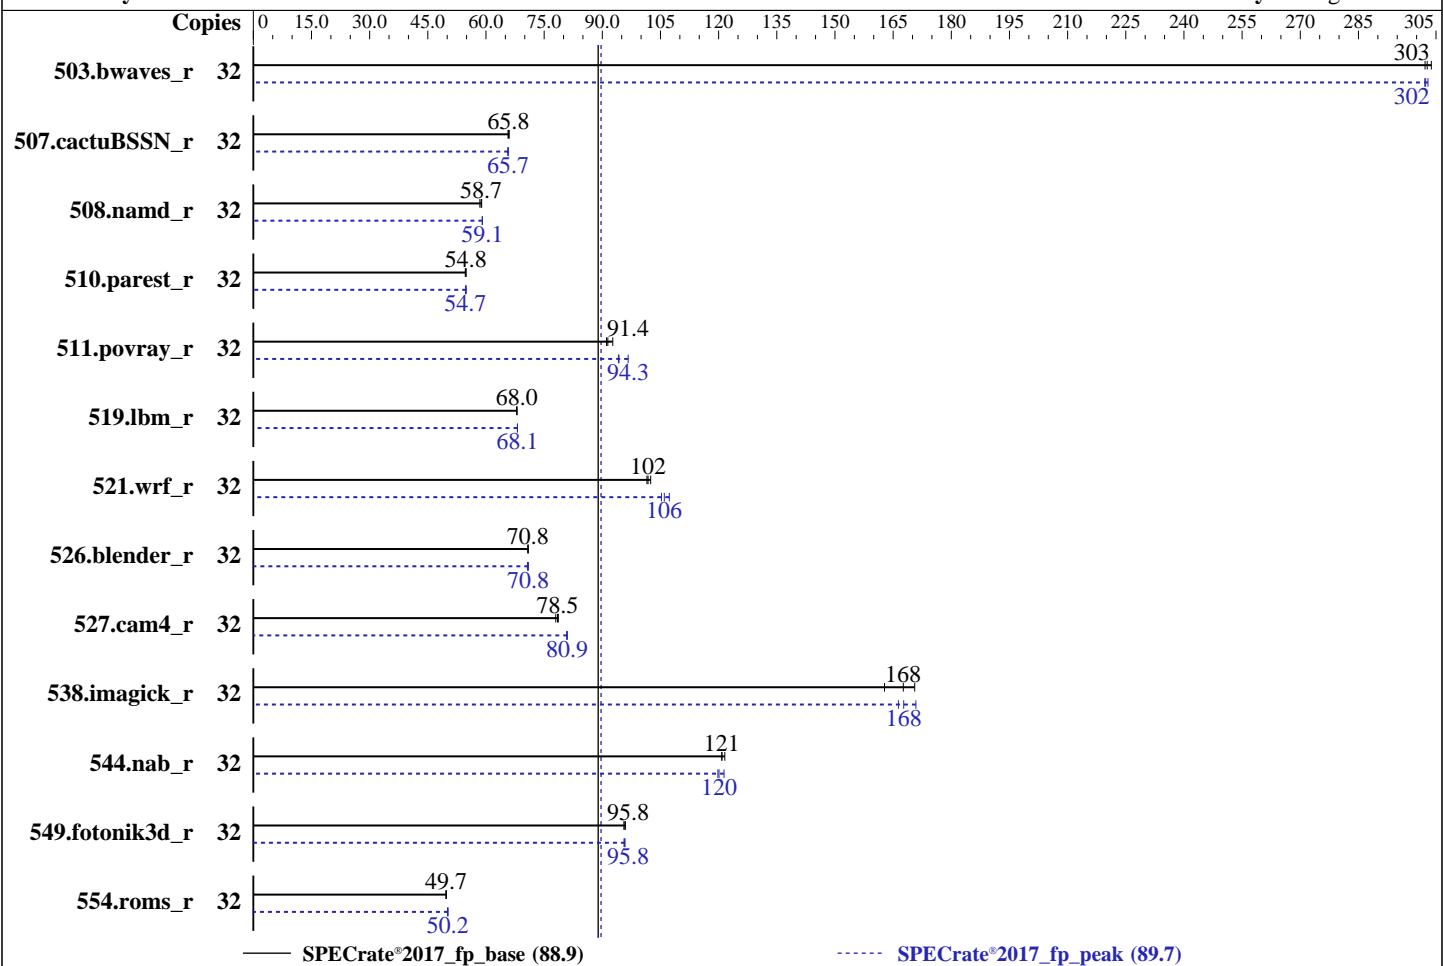

## Hardware

CPU Name: Intel Xeon Silver 4208  
 Max MHz: 3200  
 Nominal: 2100  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 (chip)s  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933P-R, running at 2400)  
 Storage: 1 x 480 GB SSD  
 Other: None

## OS:

CentOS Linux release 7.7.1908 (Core) 3.10.0-1062.el7.x86\_64

## Compiler:

C/C++: Version 19.0.4.243 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.243 of Intel Fortran Compiler Build 20190416 for Linux

## Parallel:

No

## Firmware:

Version 5.14 released May-2019

## File System:

xfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

None

## Power Management:

None

## Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

**SPECrate®2017\_fp\_base = 88.9**

**SPECrate®2017\_fp\_peak = 89.7**

CPU2017 License: 006042

Test Date: Oct-2019

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	<b>1060</b>	<b>303</b>	1056	304	1062	302	32	1062	302	1059	303	<b>1061</b>	<b>302</b>
507.cactuBSSN_r	32	617	65.7	614	66.0	<b>615</b>	<b>65.8</b>	32	617	65.7	<b>617</b>	<b>65.7</b>	616	65.7
508.namd_r	32	516	58.9	<b>518</b>	<b>58.7</b>	520	58.4	32	<b>515</b>	<b>59.1</b>	515	59.0	<b>515</b>	59.1
510.parest_r	32	1526	54.9	<b>1527</b>	<b>54.8</b>	1532	54.7	32	<b>1529</b>	<b>54.7</b>	1524	54.9	1530	54.7
511.povray_r	32	806	92.7	820	91.1	<b>817</b>	<b>91.4</b>	32	794	94.2	773	96.7	<b>792</b>	<b>94.3</b>
519.lbm_r	32	497	67.9	<b>496</b>	<b>68.0</b>	496	68.0	32	495	68.1	<b>495</b>	<b>68.1</b>	495	68.1
521.wrf_r	32	699	102	706	102	<b>704</b>	<b>102</b>	32	681	105	<b>676</b>	<b>106</b>	668	107
526.blender_r	32	688	70.8	<b>688</b>	<b>70.8</b>	688	70.9	32	689	70.7	<b>688</b>	<b>70.8</b>	687	70.9
527.cam4_r	32	718	78.0	<b>713</b>	<b>78.5</b>	711	78.7	32	693	80.8	691	81.0	<b>692</b>	<b>80.9</b>
538.imagick_r	32	<b>475</b>	<b>168</b>	489	163	467	171	32	<b>474</b>	<b>168</b>	466	171	478	166
544.nab_r	32	443	122	446	121	<b>446</b>	<b>121</b>	32	444	121	450	120	<b>448</b>	<b>120</b>
549.fotonik3d_r	32	<b>1301</b>	<b>95.8</b>	1300	95.9	1305	95.6	32	<b>1302</b>	<b>95.8</b>	1304	95.6	1301	95.8
554.roms_r	32	<b>1023</b>	<b>49.7</b>	1023	49.7	1021	49.8	32	<b>1014</b>	<b>50.2</b>	1013	50.2	1015	50.1

**SPECrate®2017\_fp\_base = 88.9**

**SPECrate®2017\_fp\_peak = 89.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has learned that this result, which used an evaluation compiler, was submitted contrary to the compiler license terms.

Intel has granted a one-time waiver for this result.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T  
(2.10 GHz, Intel Xeon Silver 4208)

**SPECrate®2017\_fp\_base = 88.9**

**SPECrate®2017\_fp\_peak = 89.7**

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

**Test Date:** Oct-2019

**Hardware Availability:** Sep-2019

**Software Availability:** Aug-2019

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on NODE5 Sat Oct 12 04:15:32 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz  
2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	32
On-line CPU(s) list:	0-31
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	2

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Date: Oct-2019

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

## Platform Notes (Continued)

NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 800.061  
CPU max MHz: 3200.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 11264K  
NUMA node0 CPU(s): 0-7,16-23  
NUMA node1 CPU(s): 8-15,24-31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_13 cdp\_13 intel\_ppin intel\_pt ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm ida arat pln pts pkru ospke avx512\_vnni md\_clear spec\_ctrl intel\_stibp flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 11264 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 195240 MB
node 0 free: 180141 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 196608 MB
node 1 free: 183782 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T  
(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Date: Oct-2019

Test Sponsor: Netweb Pte Ltd

Hardware Availability: Sep-2019

Tested by: Netweb

Software Availability: Aug-2019

## Platform Notes (Continued)

MemTotal: 394671156 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 7.7.1908 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.7.1908 (Core)
system-release: CentOS Linux release 7.7.1908 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux NODE5 3.10.0-1062.el7.x86_64 #1 SMP Wed Aug 7 18:08:02 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

run-level 3 Oct 12 01:42

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/centos-home	xfs	392G	121G	272G	31%	/home

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 5.14 05/16/2019
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T  
(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM

12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

=====

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.243 Build 20190416

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icpc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

---

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

---

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

ifort: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.243 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

icc: NOTE: The evaluation period for this product ends on 2-nov-2019 UTC.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T  
(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T  
(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

```
544.nab_r: Same as 538.imagick_r
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

```
549.fotonik3d_r: Same as 503.bwaves_r
```

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

AD400TR-28/R/T

(2.10 GHz, Intel Xeon Silver 4208)

SPECrate®2017\_fp\_base = 88.9

SPECrate®2017\_fp\_peak = 89.7

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Netweb

Test Date: Oct-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

526.blender\_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-15.html>  
<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-15.xml>  
<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-11 18:45:30-0400.

Report generated on 2020-10-06 19:33:08 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.