



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

CPU2017 License: 9006


Test Date: Oct-2019

Test Sponsor: NEC Corporation

Hardware Availability: Nov-2019

Tested by: NEC Corporation

Software Availability: Aug-2019

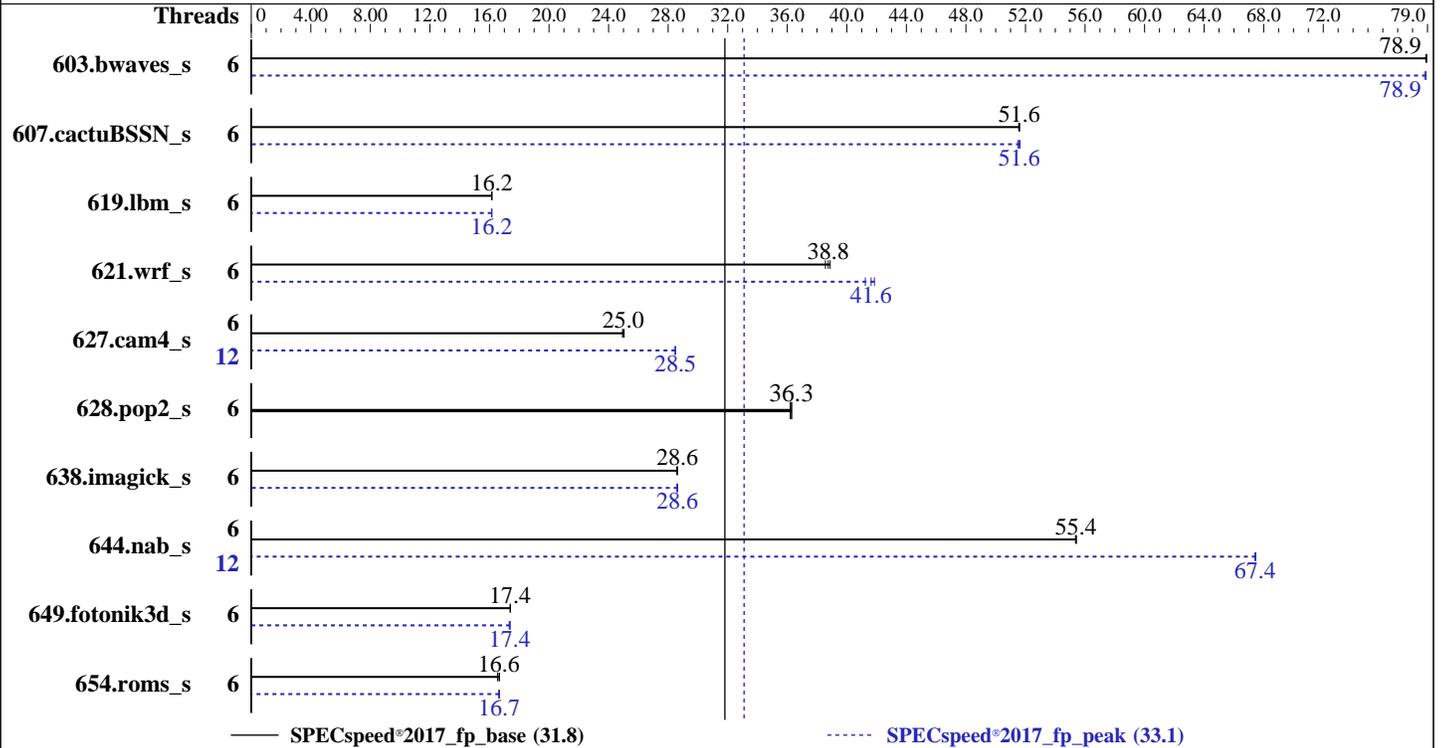

### Hardware

CPU Name: Intel Xeon E-2236  
 Max MHz: 4800  
 Nominal: 3400  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 1 TB SATA, 7200 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)  
 Kernel 3.10.0-1062.el7.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: NEC BIOS Version F01 08/21/2019 released Nov-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

CPU2017 License: 9006  
Test Sponsor: NEC Corporation  
Tested by: NEC Corporation

Test Date: Oct-2019  
Hardware Availability: Nov-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	6	748	78.9	747	78.9	<b>748</b>	<b>78.9</b>	6	<b>748</b>	<b>78.9</b>	749	78.8	748	78.9
607.cactuBSSN_s	6	<b>323</b>	<b>51.6</b>	323	51.6	323	51.5	6	<b>323</b>	<b>51.6</b>	323	51.6	324	51.5
619.lbm_s	6	324	16.2	324	16.2	<b>324</b>	<b>16.2</b>	6	324	16.2	<b>324</b>	<b>16.2</b>	324	16.2
621.wrf_s	6	340	38.9	343	38.6	<b>341</b>	<b>38.8</b>	6	321	41.2	316	41.9	<b>318</b>	<b>41.6</b>
627.cam4_s	6	<b>355</b>	<b>25.0</b>	354	25.0	355	24.9	12	311	28.5	<b>311</b>	<b>28.5</b>	311	28.5
628.pop2_s	6	327	36.3	<b>327</b>	<b>36.3</b>	328	36.2	6	327	36.3	<b>327</b>	<b>36.3</b>	328	36.2
638.imagick_s	6	<b>504</b>	<b>28.6</b>	505	28.6	504	28.6	6	<b>504</b>	<b>28.6</b>	504	28.6	505	28.6
644.nab_s	6	315	55.4	316	55.4	<b>315</b>	<b>55.4</b>	12	259	67.5	259	67.4	<b>259</b>	<b>67.4</b>
649.fotonik3d_s	6	524	17.4	<b>524</b>	<b>17.4</b>	524	17.4	6	<b>525</b>	<b>17.4</b>	526	17.3	524	17.4
654.roms_s	6	944	16.7	<b>946</b>	<b>16.6</b>	952	16.5	6	945	16.7	947	16.6	<b>945</b>	<b>16.7</b>

SPECspeed®2017\_fp\_base = **31.8**

SPECspeed®2017\_fp\_peak = **33.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes

BIOS Settings:

VT-x: Disabled  
Energy Efficient P-state: Disabled  
Energy Efficient Turbo: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on t110js Thu Oct 31 19:45:34 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz  
1 "physical id"s (chips)  
12 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 12  
physical 0: cores 0 1 2 3 4 5

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 12  
On-line CPU(s) list: 0-11  
Thread(s) per core: 2  
Core(s) per socket: 6  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Xeon(R) E-2236 CPU @ 3.40GHz  
Stepping: 10  
CPU MHz: 4714.221  
CPU max MHz: 4800.0000  
CPU min MHz: 800.0000  
BogoMIPS: 6816.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K  
L3 cache: 12288K

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

```
NUMA node0 CPU(s):      0-11
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcml cid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch intel_pt ssbd ibrs ibpb stibp
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2
erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida
arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear spec_ctrl intel_stibp
flush_lld
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 65283 MB
node 0 free: 63374 MB
node distances:
node    0
0:     10
```

```
From /proc/meminfo
MemTotal:      65716964 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux t110js 3.10.0-1062.el7.x86_64 #1 SMP Thu Jul 18 20:25:13 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion
Microarchitectural Data Sampling:	Mitigation: Clear CPU buffers; SMT vulnerable
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

run-level 3 Oct 31 19:39

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	76G	786G	9%	/

```

From /sys/devices/virtual/dmi/id
BIOS: American Megatrends Inc. F01 08/21/2019
Vendor: NEC
Product: Express5800/T110j-S [N8100-2806Y]
Serial: 0000002

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## NEC Corporation

SPECspeed®2017\_fp\_base = 31.8

### Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

```

-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

```

=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

## Base Compiler Invocation

### C benchmarks:

icc -m64 -std=c11

### Fortran benchmarks:

ifort -m64

### Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

### Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_fp\_base = 31.8

Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006  
**Test Sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2019  
**Software Availability:** Aug-2019

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_fp\_base = 31.8

Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Oct-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d\_s: Same as 603.bwaves\_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**NEC Corporation**

SPECspeed®2017\_fp\_base = 31.8

Express5800/T110j-S (Intel Xeon E-2236)

SPECspeed®2017\_fp\_peak = 33.1

**CPU2017 License:** 9006

**Test Sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2019

**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevF.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-31 06:45:34-0400.

Report generated on 2019-11-26 12:49:40 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.