



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECSpeed®2017\_int\_base = 8.19

SPECSpeed®2017\_int\_peak = 8.93

CPU2017 License: 55


Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

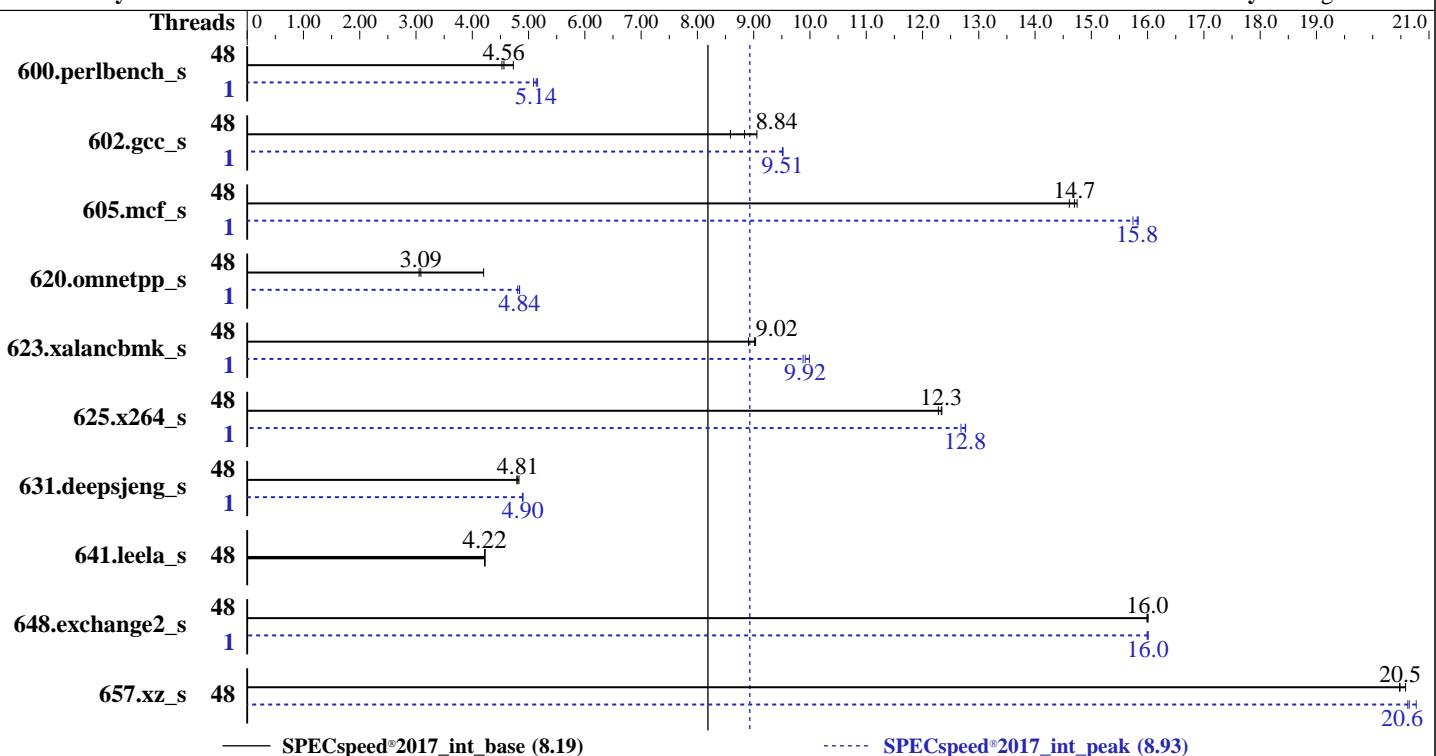

Hardware		Software	
CPU Name:	AMD EPYC 7402	OS:	SUSE Linux Enterprise Server 15 SP1
Max MHz:	3350		kernel 4.12.14-197.7-default
Nominal:	2800	Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Enabled:	48 cores, 2 chips, 2 threads/core	Parallel:	Yes
Orderable:	1,2 chips	Firmware:	Version 0.4.4 released Aug-2019
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	512 KB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	128 MB I+D on chip per chip, 16 MB shared / 3 cores	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)	Other:	jemalloc: jemalloc memory allocator library v5.2.0
Storage:	1 x 480 GB SATA SSD	Power Management:	--
Other:	None		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Sep-2019  
Hardware Availability: Sep-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	375	4.73	<b>389</b>	<b>4.56</b>	392	4.53	1	<b>346</b>	<b>5.14</b>	349	5.09	344	5.16		
602.gcc_s	48	464	8.59	<b>451</b>	<b>8.84</b>	440	9.06	1	418	9.52	<b>419</b>	<b>9.51</b>	419	9.51		
605.mcf_s	48	320	14.7	323	14.6	<b>321</b>	<b>14.7</b>	1	<b>299</b>	<b>15.8</b>	300	15.7	298	15.8		
620.omnetpp_s	48	388	4.20	534	3.05	<b>529</b>	<b>3.09</b>	1	339	4.81	337	4.84	<b>337</b>	<b>4.84</b>		
623.xalancbmk_s	48	159	8.91	<b>157</b>	<b>9.02</b>	157	9.03	1	142	9.99	<b>143</b>	<b>9.92</b>	143	9.88		
625.x264_s	48	<b>143</b>	<b>12.3</b>	143	12.3	144	12.3	1	<b>138</b>	<b>12.8</b>	138	12.8	139	12.7		
631.deepsjeng_s	48	299	4.79	297	4.83	<b>298</b>	<b>4.81</b>	1	292	4.90	<b>293</b>	<b>4.90</b>	293	4.89		
641.leela_s	48	404	4.23	404	4.22	<b>404</b>	<b>4.22</b>	48	404	4.23	404	4.22	<b>404</b>	<b>4.22</b>		
648.exchange2_s	48	184	16.0	<b>184</b>	<b>16.0</b>	184	16.0	1	<b>184</b>	<b>16.0</b>	184	16.0	184	16.0		
657.xz_s	48	300	20.6	<b>302</b>	<b>20.5</b>	302	20.5	48	300	20.6	<b>299</b>	<b>20.6</b>	298	20.8		
SPECspeed®2017_int_base = <b>8.19</b>								SPECspeed®2017_int_peak = <b>8.93</b>								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/root/cpu2017-1.0.5/amd\_rate\_aocc200\_rome\_B\_lib/64  
;/root/cpu2017-1.0.5/amd\_rate\_aocc200\_rome\_B\_lib/32:  
MALLOC\_CONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fllto  
jemalloc 5.2.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

NUMA Nodes Per Socket set to 4

CCX as NUMA Domain set to Enabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost Enabled

Cstates set to Enabled

Memory Patrol Scrub Disabled

Memory Refresh Rate set to 1x

PCI ASPM L1 Link Power Management Disabled

Determinism Slider set to Power Determinism

Efficiency Optimized Mode Disabled

Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on suse15-spl Wed Aug 28 08:49:41 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7402 24-Core Processor

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings   : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7402 24-Core Processor
Stepping:               0
CPU MHz:               2794.662
BogoMIPS:              5589.32
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-2,48-50
NUMA node1 CPU(s):    3-5,51-53
NUMA node2 CPU(s):    6-8,54-56
NUMA node3 CPU(s):    9-11,57-59
NUMA node4 CPU(s):    12-14,60-62
NUMA node5 CPU(s):    15-17,63-65
NUMA node6 CPU(s):    18-20,66-68
NUMA node7 CPU(s):    21-23,69-71
NUMA node8 CPU(s):    24-26,72-74
NUMA node9 CPU(s):    27-29,75-77
NUMA node10 CPU(s):   30-32,78-80
NUMA node11 CPU(s):   33-35,81-83
NUMA node12 CPU(s):   36-38,84-86
NUMA node13 CPU(s):   39-41,87-89
NUMA node14 CPU(s):   42-44,90-92
NUMA node15 CPU(s):   45-47,93-95
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_13
cdp_13 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bni2
cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 48 49 50
node 0 size: 31820 MB
node 0 free: 31625 MB
node 1 cpus: 3 4 5 51 52 53
node 1 size: 32254 MB
node 1 free: 32162 MB
node 2 cpus: 6 7 8 54 55 56
node 2 size: 32254 MB
node 2 free: 32128 MB
node 3 cpus: 9 10 11 57 58 59
node 3 size: 32254 MB
node 3 free: 32172 MB
node 4 cpus: 12 13 14 60 61 62
node 4 size: 32254 MB
node 4 free: 32188 MB
node 5 cpus: 15 16 17 63 64 65
node 5 size: 32254 MB
node 5 free: 32191 MB
node 6 cpus: 18 19 20 66 67 68
node 6 size: 32254 MB
node 6 free: 32147 MB
node 7 cpus: 21 22 23 69 70 71
node 7 size: 32242 MB
node 7 free: 32165 MB
node 8 cpus: 24 25 26 72 73 74
node 8 size: 32254 MB
node 8 free: 32200 MB
node 9 cpus: 27 28 29 75 76 77
node 9 size: 32254 MB
node 9 free: 32202 MB
node 10 cpus: 30 31 32 78 79 80
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 10 size: 32254 MB
node 10 free: 32201 MB
node 11 cpus: 33 34 35 81 82 83
node 11 size: 32254 MB
node 11 free: 32199 MB
node 12 cpus: 36 37 38 84 85 86
node 12 size: 32254 MB
node 12 free: 32200 MB
node 13 cpus: 39 40 41 87 88 89
node 13 size: 32224 MB
node 13 free: 32167 MB
node 14 cpus: 42 43 44 90 91 92
node 14 size: 32254 MB
node 14 free: 32200 MB
node 15 cpus: 45 46 47 93 94 95
node 15 size: 32252 MB
node 15 free: 32197 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  11  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  1: 11  10  12  12  12  12  12  32  32  32  32  32  32  32  32  32
  2: 12  12  10  11  12  12  12  32  32  32  32  32  32  32  32  32
  3: 12  12  11  10  12  12  12  32  32  32  32  32  32  32  32  32
  4: 12  12  12  12  10  11  12  32  32  32  32  32  32  32  32  32
  5: 12  12  12  12  11  10  12  32  32  32  32  32  32  32  32  32
  6: 12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
  7: 12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
  9: 32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
 10: 32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
 11: 32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
 12: 32  32  32  32  32  32  32  32  12  12  12  12  12  10  11  12
 13: 32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
 14: 32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 15: 32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
```

From /proc/meminfo

```
MemTotal:      527968208 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
ID="sles"  
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux suse15-sp1 4.12.14-197.7-default #1 SMP Mon Jun 24 08:33:54 UTC 2019 (650fd32)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,  
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Nov 25 12:46

```
SPEC is set to: /home/cpu2017-1.0.5  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 444G 20G 425G 5% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.4 08/05/2019

Memory:

```
16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aoxx-compiler-2.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

C++ | 623.xalancbmk\_s(peak)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
     | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

C++ | 623.xalancbmk\_s(peak)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
     | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

=====
Fortran | 648.exchange2\_s(base, peak)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC\_OPENMP -fopenmp  
-DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -D\_FILE\_OFFSET\_BITS=64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver2  
-mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fiv-function-specialization -DSPEC\_OPENMP -fopenmp  
-DUSE\_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp  
-lpthread -ldl -ljemalloc -lflang

602.gcc\_s: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fvl-function-specialization -z muldefs -DSPEC_OPENMP  
-fopenmp -DUSE_OPENMP -fgnu89-inline -fopenmp=libomp  
-lomp -lpthread -ldl -ljemalloc
```

605.mcf\_s: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fvl-function-specialization -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp  
-lpthread -ldl -ljemalloc -lflang
```

625.x264\_s: Same as 600.perlbench\_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fvl-function-specialization -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-lmvec -lamdlibm -ljemalloc -lflang
```

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 8.19

PowerEdge C6525 (AMD EPYC 7402, 2.80 GHz)

SPECspeed®2017\_int\_peak = 8.93

CPU2017 License: 55

Test Date: Sep-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk\_s: -Wno-return-type

-L/sppo/dev/cpu2017/amd\_speed\_aocc200\_rome/amd\_speed\_aocc200\_rome\_B\_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-28 09:49:40-0400.

Report generated on 2019-11-26 12:52:35 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.