# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_int_base = 452

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019
**Hardware Availability:** Apr-2019
**Software Availability:** May-2019

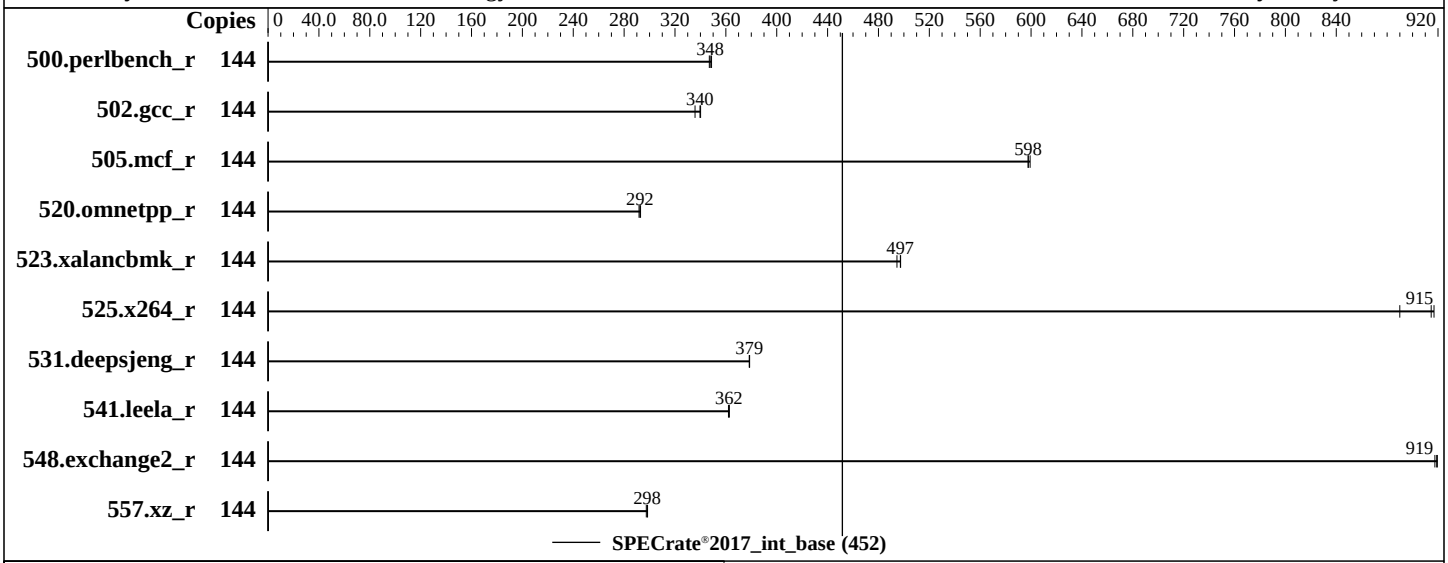


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6240 |
| Max MHz: | 3900 |
| Nominal: | 2600 |
| Enabled: | 72 cores, 4 chips, 2 threads/core |
| Orderable: | 2,4 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 24.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R) |
| Storage: | 1 x 800 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default |
| Compiler: | C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version TEE142E 2.30 released Aug-2019 tested as TEE141E 2.30 Jul-2019 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |
| Power Management: | Disable |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850
(2.60 GHz, Intel Xeon Gold 6240)

SPECrate®2017_int_base = 452

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2019
**Hardware Availability:** Apr-2019
**Software Availability:** May-2019

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 144 | 657 | 349 | **659** | **348** | 661 | 347 | | | | | | | |
| 502.gcc_r | 144 | 607 | 336 | **600** | **340** | 599 | 340 | | | | | | | |
| 505.mcf_r | 144 | 388 | 599 | **389** | **598** | 389 | 598 | | | | | | | |
| 520.omnetpp_r | 144 | 648 | 292 | **646** | **292** | 645 | 293 | | | | | | | |
| 523.xalancbmk_r | 144 | **306** | **497** | 306 | 497 | 307 | 495 | | | | | | | |
| 525.x264_r | 144 | 283 | 890 | **276** | **915** | 275 | 917 | | | | | | | |
| 531.deepsjeng_r | 144 | 436 | 378 | 436 | 379 | **436** | **379** | | | | | | | |
| 541.leela_r | 144 | **658** | **362** | 657 | 363 | 659 | 362 | | | | | | | |
| 548.exchange2_r | 144 | 410 | 919 | 411 | 918 | **411** | **919** | | | | | | | |
| 557.xz_r | 144 | 521 | 298 | 523 | 297 | **522** | **298** | | | | | | | |

**SPECrate®2017_int_base = 452**

**SPECrate®2017_int_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64:/home/cpu2017-1.1.0-ic19.0u4/l
     ib/ia32:/home/cpu2017-1.1.0-ic19.0u4/je5.0.1-32"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

**(Continued on next page)**

## General Notes (Continued)

```
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
DCU Streamer Prefetcher set to Disable
SNC set to Enable

 Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-9o83 Thu Nov  7 10:39:28 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
       4  "physical id"s (chips)
       144 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 18
       siblings  : 36
       physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
       physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                144
      On-line CPU(s) list:   0-143
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Thread(s) per core:    2
      Core(s) per socket:    18
      Socket(s):             4
      NUMA node(s):          8
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6240 CPU @ 2.60GHz
      Stepping:              6
      CPU MHz:               2600.000
      CPU max MHz:           3900.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              25344K
      NUMA node0 CPU(s):     0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
      NUMA node1 CPU(s):     3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
      NUMA node2 CPU(s):     18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
      NUMA node3 CPU(s):     21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
      NUMA node4 CPU(s):     36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
      NUMA node5 CPU(s):     39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
      NUMA node6 CPU(s):     54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
      NUMA node7 CPU(s):     57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
      rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts pku ospke avx512_vnni flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
    node 0 size: 193131 MB
    node 0 free: 192182 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
   node 1 size: 193527 MB
   node 1 free: 193077 MB
   node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
   node 2 size: 193527 MB
   node 2 free: 192984 MB
   node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
   node 3 size: 193527 MB
   node 3 free: 193114 MB
   node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
   node 4 size: 193498 MB
   node 4 free: 192899 MB
   node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
   node 5 size: 193527 MB
   node 5 free: 193074 MB
   node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
   node 6 size: 193527 MB
   node 6 free: 193085 MB
   node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
   node 7 size: 193524 MB
   node 7 free: 193093 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  31  31
     1:  11  10  21  21  21  21  31  31
     2:  21  21  10  11  31  31  21  21
     3:  21  21  11  10  31  31  21  21
     4:  21  21  31  31  10  11  21  21
     5:  21  21  31  31  11  10  21  21
     6:  31  31  21  21  21  21  10  11
     7:  31  31  21  21  21  21  11  10

  From /proc/meminfo
     MemTotal:       1584938164 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 4
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP4"
```


**(Continued on next page)**

## Platform Notes (Continued)

```
      VERSION_ID="12.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
   Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
                                          Speculation, IBPB, IBRS_FW

run-level 3 Nov 7 01:55

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  744G  146G  597G  20% /home

From /sys/devices/virtual/dmi/id
    BIOS:    Lenovo -[TEE141E-2.30]- 07/02/2019
    Vendor:  Lenovo
    Product: ThinkSystem SR850 -[7X1925Z000]-
    Product Family: ThinkSystem
    Serial:  1234567890

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

## Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`

**(Continued on next page)**

## Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-06 21:39:27-0500.
Report generated on 2019-11-26 12:53:47 by CPU2017 PS formatter v6255.
Originally published on 2019-11-26.