SPEC CPU®2017 Integer Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.70 GHz, Intel Xeon Platinum 8280M)

SPECrate®2017_int_base = 648

SPECrate®2017_int_peak = Not Run

CPU2017 License:	3	**Test Date:**	Jun-2019
Test Sponsor:	HPE	**Hardware Availability:**	Apr-2019
Tested by:	HPE	**Software Availability:**	Feb-2019

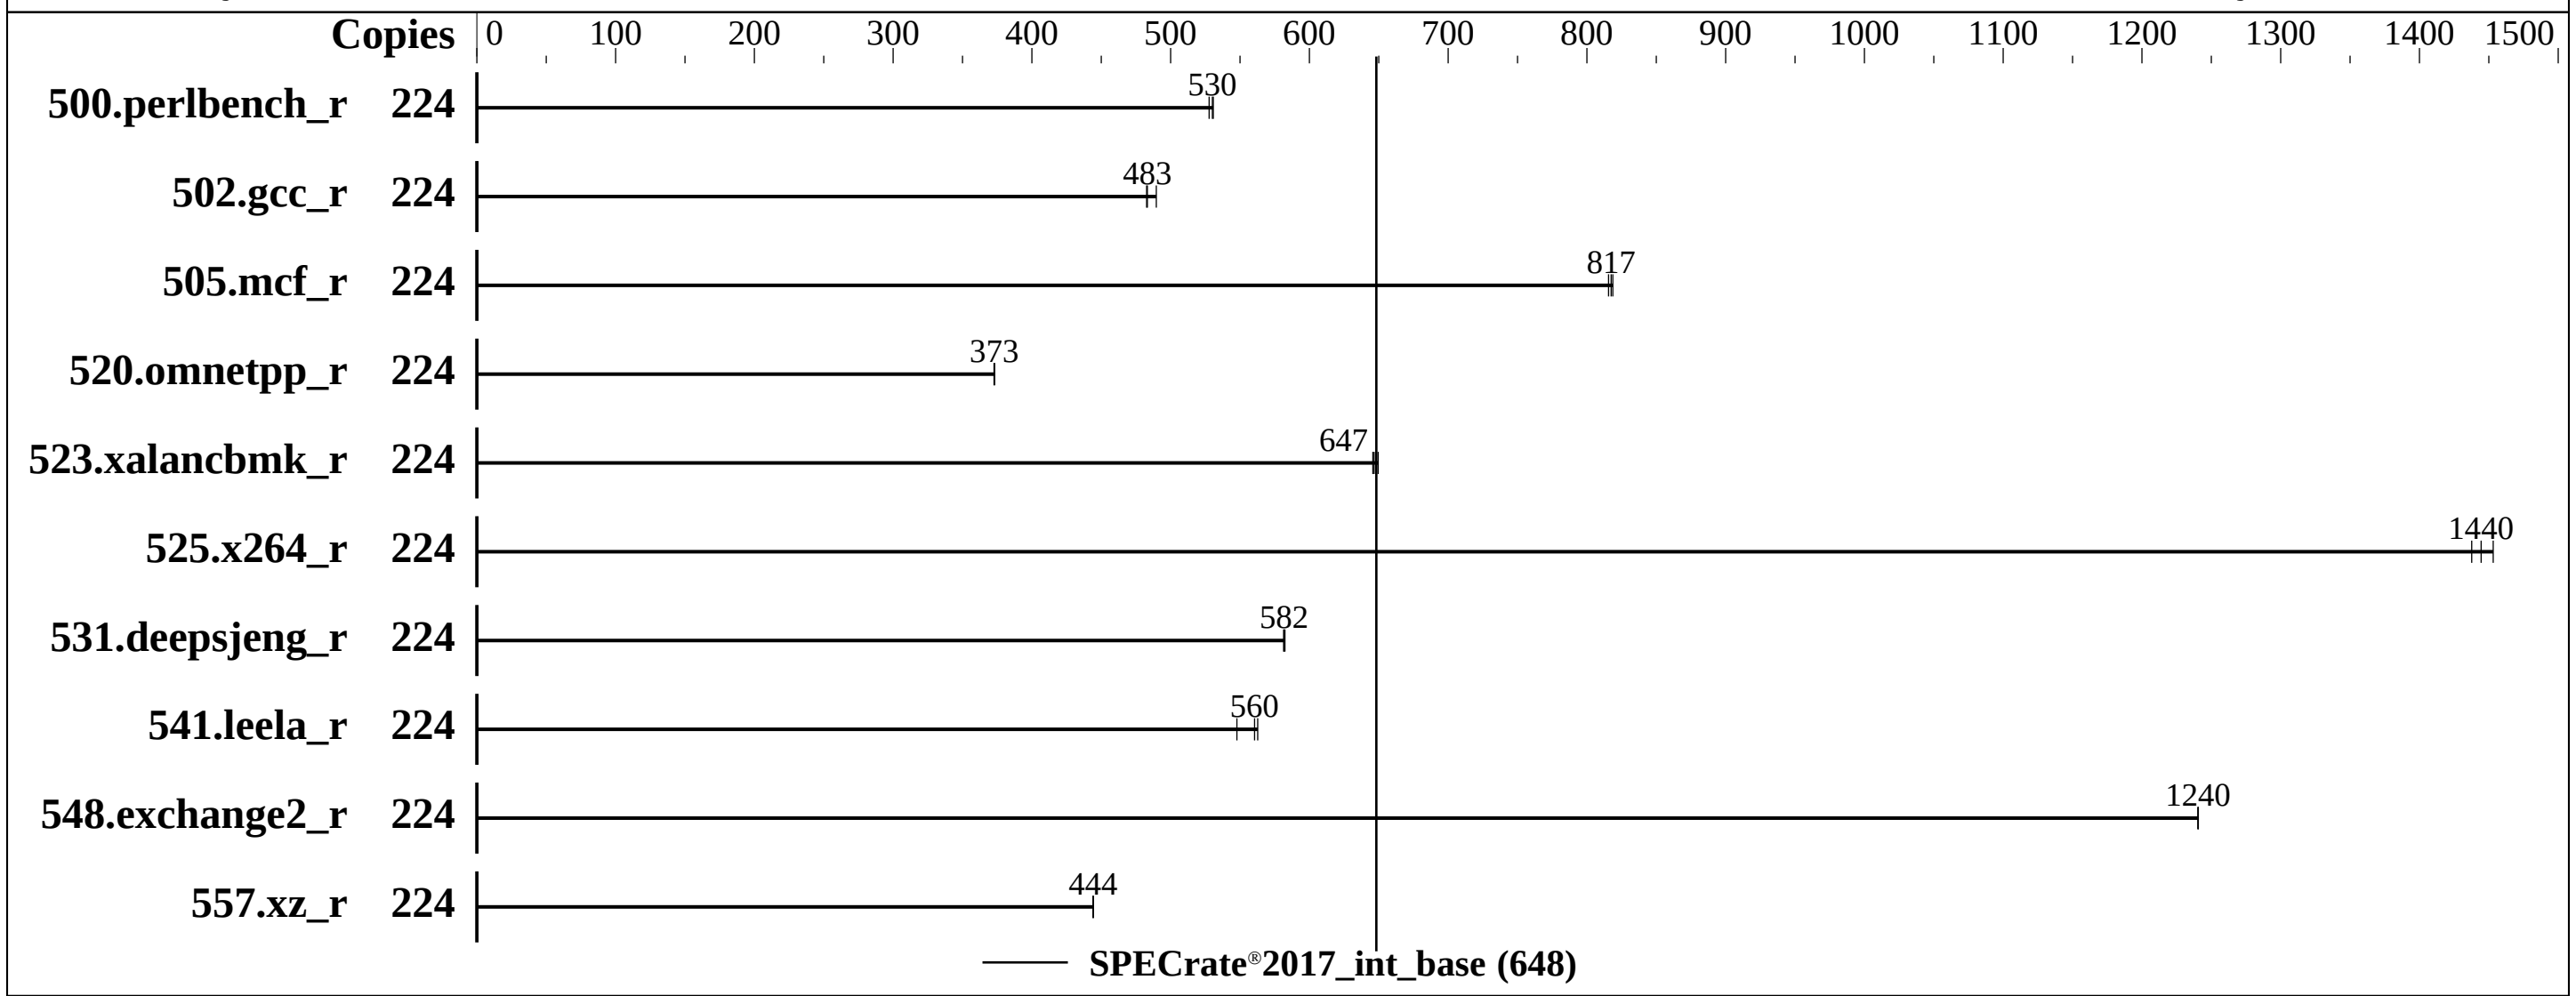

Hardware

CPU Name:	Intel Xeon Platinum 8280M
Max MHz:	4000
Nominal:	2700
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	1, 2, 3, 4 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 400 GB SAS SSD, RAID 0
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) Kernel 4.12.14-23-default
Compiler:	C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux; Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux
Parallel:	No
Firmware:	HPE BIOS Version U34 04/19/2019 released Apr-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	--

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.70 GHz, Intel Xeon Platinum 8280M)

SPECrate®2017_int_base = 648

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE
Test Date: Jun-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	**673**	**530**	676	528	672	531							
502.gcc_r	224	648	490	**656**	**483**	657	483							
505.mcf_r	224	442	819	**443**	**817**	444	816							
520.omnetpp_r	224	788	373	**788**	**373**	788	373							
523.xalancbmk_r	224	366	646	364	650	**366**	**647**							
525.x264_r	224	273	1440	270	1450	**272**	**1440**							
531.deepsjeng_r	224	441	581	441	582	**441**	**582**							
541.leela_r	224	677	548	659	563	**662**	**560**							
548.exchange2_r	224	**473**	**1240**	473	1240	473	1240							
557.xz_r	224	545	444	545	444	**545**	**444**							

SPECrate®2017_int_base = 648

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
```

General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64"

 Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.70 GHz, Intel Xeon Platinum 8280M)

SPECrate®2017_int_base = 648

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3		**Test Date:**	Jun-2019
Test Sponsor:	HPE	**Hardware Availability:**	Apr-2019
Tested by:	HPE	**Software Availability:**	Feb-2019

General Notes (Continued)

```
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 Memory Patrol Scrubbing set to Disabled
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Enhanced Processor Performance set to Enabled
 Workload Profile set to General Throughput Compute
 Workload Profile set to Custom
  Energy/Performance Bias set to Balanced Performance
  Advanced Memory Protection set to Advanced ECC
Sysinfo program /home/cpu2017_u2/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on dl580-sles15 Fri Jun  7 04:34:45 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
      4  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
      30
      physical 1: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
      30
      physical 2: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
      30
      physical 3: cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29
      30

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              224
     On-line CPU(s) list: 0-223
     Thread(s) per core:  2
```

(Continued on next page)

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL580 Gen10
(2.70 GHz, Intel Xeon Platinum 8280M)

SPECrate®2017_int_base = 648

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3		**Test Date:**	Jun-2019
Test Sponsor:	HPE	**Hardware Availability:**	Apr-2019
Tested by:	HPE	**Software Availability:**	Feb-2019

Platform Notes (Continued)

```
     Core(s) per socket:  28
     Socket(s):           4
     NUMA node(s):        8
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
     Stepping:            6
     CPU MHz:             2700.000
     BogoMIPS:            5400.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            39424K
     NUMA node0 CPU(s):   0-13,112-125
     NUMA node1 CPU(s):   14-27,126-139
     NUMA node2 CPU(s):   28-41,140-153
     NUMA node3 CPU(s):   42-55,154-167
     NUMA node4 CPU(s):   56-69,168-181
     NUMA node5 CPU(s):   70-83,182-195
     NUMA node6 CPU(s):   84-97,196-209
     NUMA node7 CPU(s):   98-111,210-223
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
     sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
     tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
     epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
     vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
     avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
     xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
     ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 112 113 114 115 116 117 118 119 120 121
   122 123 124 125
   node 0 size: 96348 MB
   node 0 free: 95792 MB
   node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 126 127 128 129 130 131 132 133
   134 135 136 137 138 139
```

(Continued on next page)

Platform Notes (Continued)

```
    node 1 size: 96762 MB
    node 1 free: 96533 MB
    node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 140 141 142 143 144 145 146 147
    148 149 150 151 152 153
    node 2 size: 96762 MB
    node 2 free: 96618 MB
    node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 154 155 156 157 158 159 160 161
    162 163 164 165 166 167
    node 3 size: 96762 MB
    node 3 free: 96607 MB
    node 4 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 168 169 170 171 172 173 174 175
    176 177 178 179 180 181
    node 4 size: 96733 MB
    node 4 free: 96598 MB
    node 5 cpus: 70 71 72 73 74 75 76 77 78 79 80 81 82 83 182 183 184 185 186 187 188 189
    190 191 192 193 194 195
    node 5 size: 96762 MB
    node 5 free: 96617 MB
    node 6 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 196 197 198 199 200 201 202 203
    204 205 206 207 208 209
    node 6 size: 96762 MB
    node 6 free: 96641 MB
    node 7 cpus: 98 99 100 101 102 103 104 105 106 107 108 109 110 111 210 211 212 213 214
    215 216 217 218 219 220 221 222 223
    node 7 size: 96760 MB
    node 7 free: 96640 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  21  31  31  31  31  31  31
      1:  21  10  31  31  31  31  31  31
      2:  31  31  10  21  31  31  31  31
      3:  31  31  21  10  31  31  31  31
      4:  31  31  31  31  10  21  31  31
      5:  31  31  31  31  21  10  31  31
      6:  31  31  31  31  31  31  10  21
      7:  31  31  31  31  31  31  21  10

  From /proc/meminfo
     MemTotal:       792223068 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15"
        VERSION_ID="15"
```

(Continued on next page)

Platform Notes (Continued)

```
      PRETTY_NAME="SUSE Linux Enterprise Server 15"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
   Linux dl580-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Jun 7 04:33

SPEC is set to: /home/cpu2017_u2
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  371G   82G  288G  23% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS HPE U34 04/19/2019
  Memory:
   24x UNKNOWN NOT AVAILABLE
   24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64`
`-lqkmalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64`
`-lqkmalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte`
`-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64`
`-lqkmalloc`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml

Tested with SPEC CPU®2017 v1.0.5 on 2019-06-06 19:04:44-0400.
Report generated on 2019-12-10 14:55:52 by CPU2017 PS formatter v6255.
Originally published on 2019-12-10.