



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066


Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

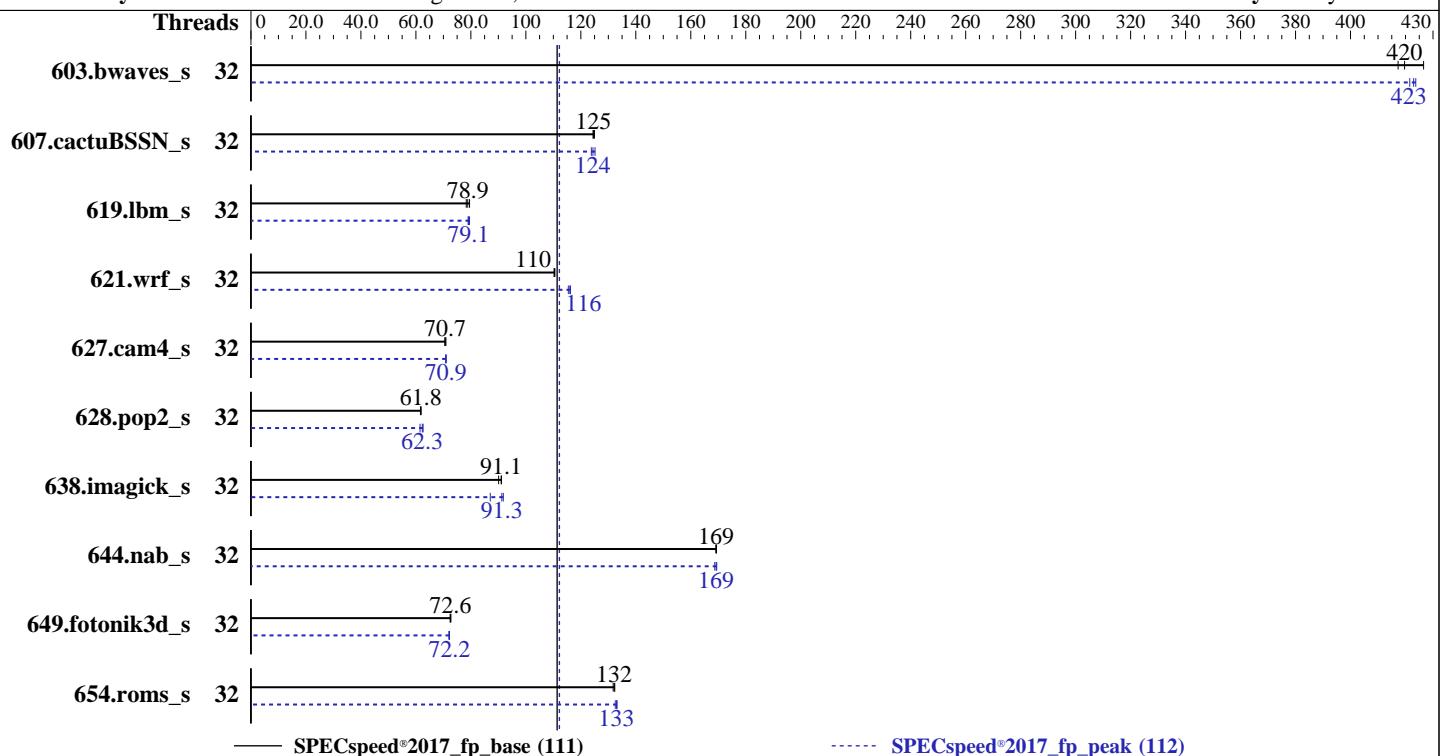

Hardware		Software	
CPU Name:	Intel Xeon Silver 4216	OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo)
Max MHz:	3200		3.10.0-957.el7.x86_64
Nominal:	2100	Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Enabled:	32 cores, 2 chips		Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Orderable:	1,2 chips	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 2.00.32P05 released Sep-2019 BIOS
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	22 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2933P-R, running at 2400)	Peak Pointers:	64-bit
Storage:	1 x 240 GB SATA SSD	Other:	None
Other:	None	Power Management:	--



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	138	427	141	417	<u>141</u>	<u>420</u>	32	<u>139</u>	<u>423</u>	140	422	139	424
607.cactuBSSN_s	32	133	125	<u>134</u>	<u>125</u>	134	124	32	133	125	135	124	<u>134</u>	<u>124</u>
619.lbm_s	32	65.9	79.5	66.9	78.3	<u>66.4</u>	<u>78.9</u>	32	<u>66.2</u>	<u>79.1</u>	65.9	79.5	66.3	79.0
621.wrf_s	32	120	111	<u>120</u>	<u>110</u>	120	110	32	<u>114</u>	<u>116</u>	114	116	115	115
627.cam4_s	32	126	70.5	125	70.9	<u>125</u>	<u>70.7</u>	32	<u>125</u>	<u>70.9</u>	125	70.9	125	71.0
628.pop2_s	32	193	61.7	192	61.9	<u>192</u>	<u>61.8</u>	32	193	61.5	190	62.6	<u>190</u>	<u>62.3</u>
638.imagick_s	32	158	91.1	<u>158</u>	<u>91.1</u>	160	90.1	32	166	87.1	157	91.8	<u>158</u>	<u>91.3</u>
644.nab_s	32	103	169	<u>103</u>	<u>169</u>	103	169	32	103	169	104	169	<u>103</u>	<u>169</u>
649.fotonik3d_s	32	<u>126</u>	<u>72.6</u>	125	72.7	126	72.5	32	127	72.0	126	72.2	<u>126</u>	<u>72.2</u>
654.roms_s	32	119	132	<u>119</u>	<u>132</u>	119	132	32	119	133	118	133	<u>118</u>	<u>133</u>
SPECSpeed®2017_fp_base = 111														
SPECSpeed®2017_fp_peak = 112														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/speccpu/lib/intel64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7990X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Set Hyper-Threading to Disabled

Set XPT Prefetch to Enabled

Set LLC dead line alloc to Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

Set Stale AtoS to Enabled

Set Intel VT for Directed I/O (VT-d) to Disabled

Set Package C State to No Limit

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Tue Nov 12 04:55:27 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 1

Core(s) per socket: 16

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4216 CPU @ 2.10GHz

Stepping: 6

CPU MHz: 800.061

CPU max MHz: 3200.0000

CPU min MHz: 800.0000

BogoMIPS: 4200.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 22528K

NUMA node0 CPU(s): 0-15

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECspeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

```
NUMA node1 CPU(s):      16-31
Flags:          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
               pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
               lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
               aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
               fma cxl16 xptr pdcm pcid dca sse4_1 sse4_2 x2apic movebe popcnt tsc_deadline_timer aes
               xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
               intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
               vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
               avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
               xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
               pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni spec_ctrl
               intel_stibp flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 96921 MB
node 0 free: 94051 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 98304 MB
node 1 free: 95642 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

From /proc/meminfo

```
MemTotal:       196458628 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.6 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.6"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

```
run-level 3 Nov 12 04:54
```

```
SPEC is set to: /home/speccpu
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	169G	79G	90G	47%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.00.32P05 09/21/2019
```

```
Memory:
```

```
12x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933, configured at 2400
12x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
| C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
|   | 644.nab_s(base, peak)
=====
```

```
=====
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
=====
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====
```

```
=====
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2_s: Same as 621.wrf_s

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed®2017_fp_base = 111

H3C UniServer R4900 G3 (Intel Xeon Silver 4216)

SPECSpeed®2017_fp_peak = 112

CPU2017 License: 9066

Test Date: Nov-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: May-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.xml

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-11-12 04:55:26-0500.

Report generated on 2019-12-10 14:56:48 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-10.