SPEC CPU®2017 Floating Point Rate Result

Lenovo Global Technology

ThinkSystem SR850
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017_fp_base = 232

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

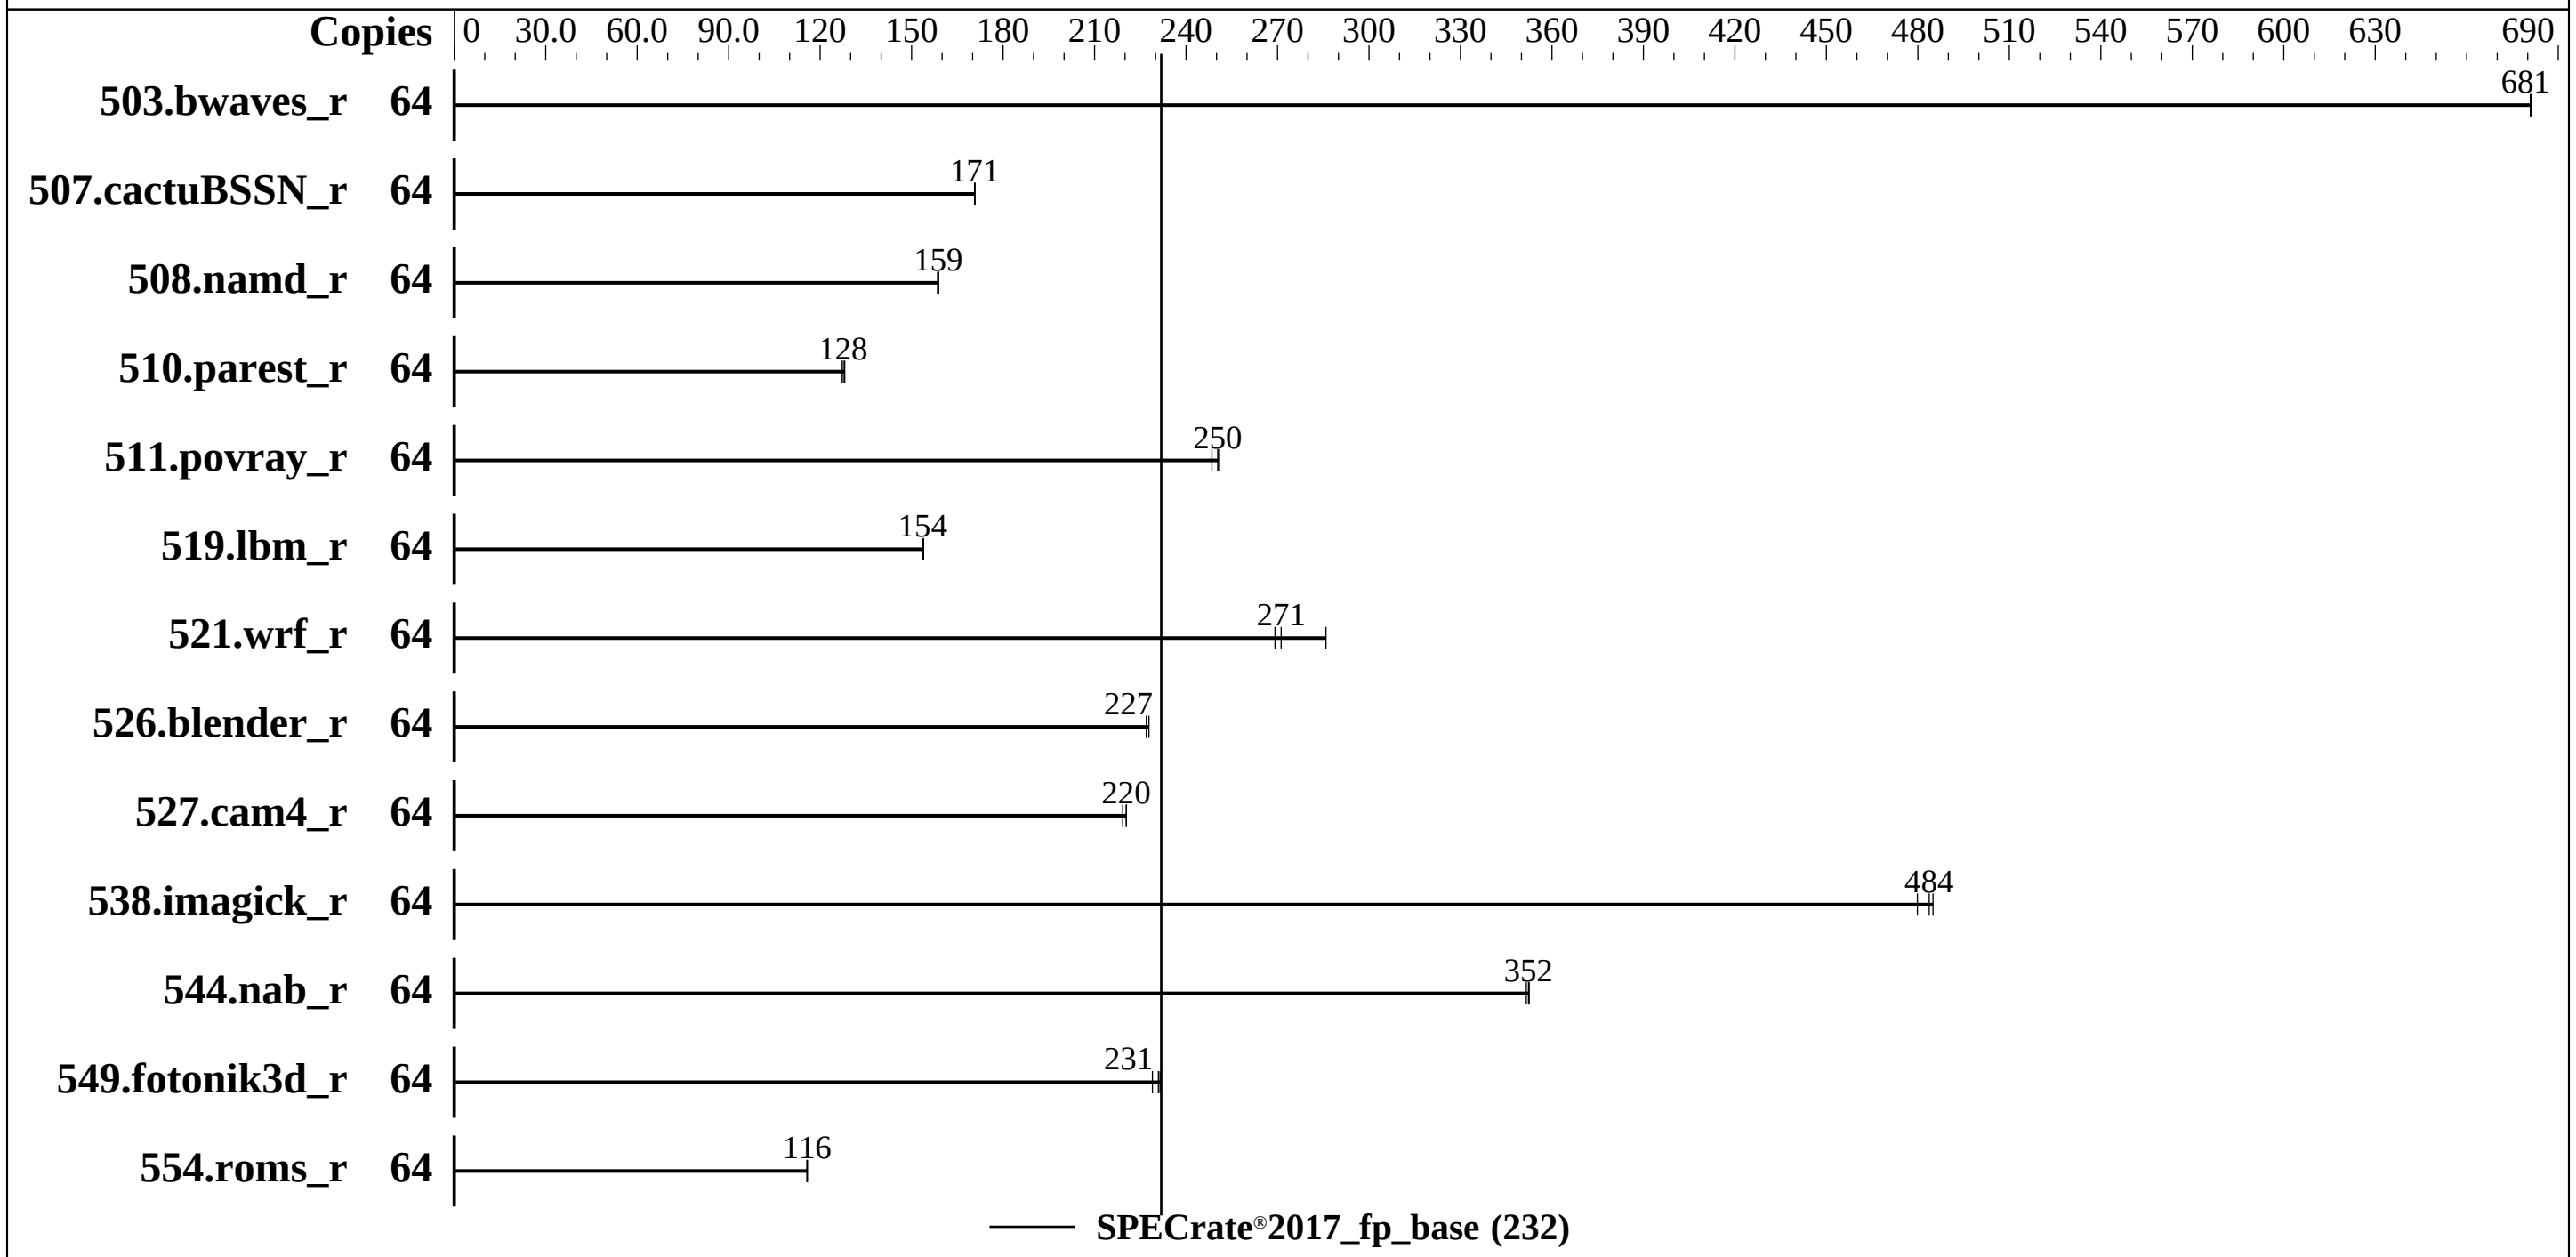

Hardware

CPU Name:	Intel Xeon Gold 5217
Max MHz:	3700
Nominal:	3000
Enabled:	32 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	11 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	1 x 800 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 (x86_64) Kernel 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Lenovo BIOS Version TEE142E 2.30 released Aug-2019 tested as TEE141E 2.30 Jul-2019
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Lenovo Global Technology

ThinkSystem SR850
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017_fp_base = 232

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology
Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	943	681	942	681	**943**	**681**							
507.cactuBSSN_r	64	474	171	475	171	**475**	**171**							
508.namd_r	64	384	159	**383**	**159**	383	159							
510.parest_r	64	1307	128	**1312**	**128**	1318	127							
511.povray_r	64	601	248	596	251	**597**	**250**							
519.lbm_r	64	**439**	**154**	438	154	439	153							
521.wrf_r	64	533	269	501	286	**529**	**271**							
526.blender_r	64	428	228	429	227	**429**	**227**							
527.cam4_r	64	508	220	**508**	**220**	511	219							
538.imagick_r	64	328	485	**329**	**484**	332	480							
544.nab_r	64	306	353	**306**	**352**	306	352							
549.fotonik3d_r	64	**1080**	**231**	1078	231	1089	229							
554.roms_r	64	879	116	**879**	**116**	878	116							

SPECrate®2017_fp_base = 232

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy

 Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-9o83 Tue Nov 12 21:19:40 2019

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
       4  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7
       physical 2: cores 0 1 2 3 4 5 6 7
       physical 3: cores 0 1 2 3 4 5 6 7

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                64
      On-line CPU(s) list:   0-63
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:    2
      Core(s) per socket:    8
      Socket(s):             4
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
      Stepping:              6
      CPU MHz:               3000.000
      CPU max MHz:           3700.0000
      CPU min MHz:           1200.0000
      BogoMIPS:              6000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              11264K
      NUMA node0 CPU(s):     0-7,32-39
      NUMA node1 CPU(s):     8-15,40-47
      NUMA node2 CPU(s):     16-23,48-55
      NUMA node3 CPU(s):     24-31,56-63
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 11264 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
   node 0 size: 386664 MB
   node 0 free: 386160 MB
   node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
   node 1 size: 387029 MB
   node 1 free: 386721 MB
   node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
```

(Continued on next page)

Platform Notes (Continued)

```
    node 2 size: 387058 MB
    node 2 free: 386770 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
    node 3 size: 387055 MB
    node 3 free: 386739 MB
    node distances:
    node   0   1   2   3
      0:  10  21  21  31
      1:  21  10  31  21
      2:  21  31  10  21
      3:  31  21  21  10

  From /proc/meminfo
     MemTotal:       1584955472 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 4
        # This file is deprecated and will be removed in a future service pack or release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP4"
        VERSION_ID="12.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp4"

  uname -a:
     Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):         Not affected
  Microarchitectural Data Sampling:          No status reported
  CVE-2017-5754 (Meltdown):                  Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                             via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2):         Mitigation: Indirect Branch Restricted
                                             Speculation, IBPB, IBRS_FW
```

(Continued on next page)

Platform Notes (Continued)

```
run-level 3 Nov 12 21:13

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda2      btrfs  744G  147G  598G  20% /home

From /sys/devices/virtual/dmi/id
    BIOS:    Lenovo -[TEE141E-2.30]- 07/02/2019
    Vendor:  Lenovo
    Product: ThinkSystem SR850 -[7X1925Z000]-
    Product Family: ThinkSystem
    Serial:  1234567890

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
```

(Continued on next page)

Lenovo Global Technology

ThinkSystem SR850
(3.00 GHz, Intel Xeon Gold 5217)

SPECrate®2017_fp_base = 232

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-12 08:19:39-0500.
Report generated on 2019-12-11 12:48:23 by CPU2017 PS formatter v6255.
Originally published on 2019-12-11.