SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_fp_base = 257

SPECrate®2017_fp_peak = 285

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

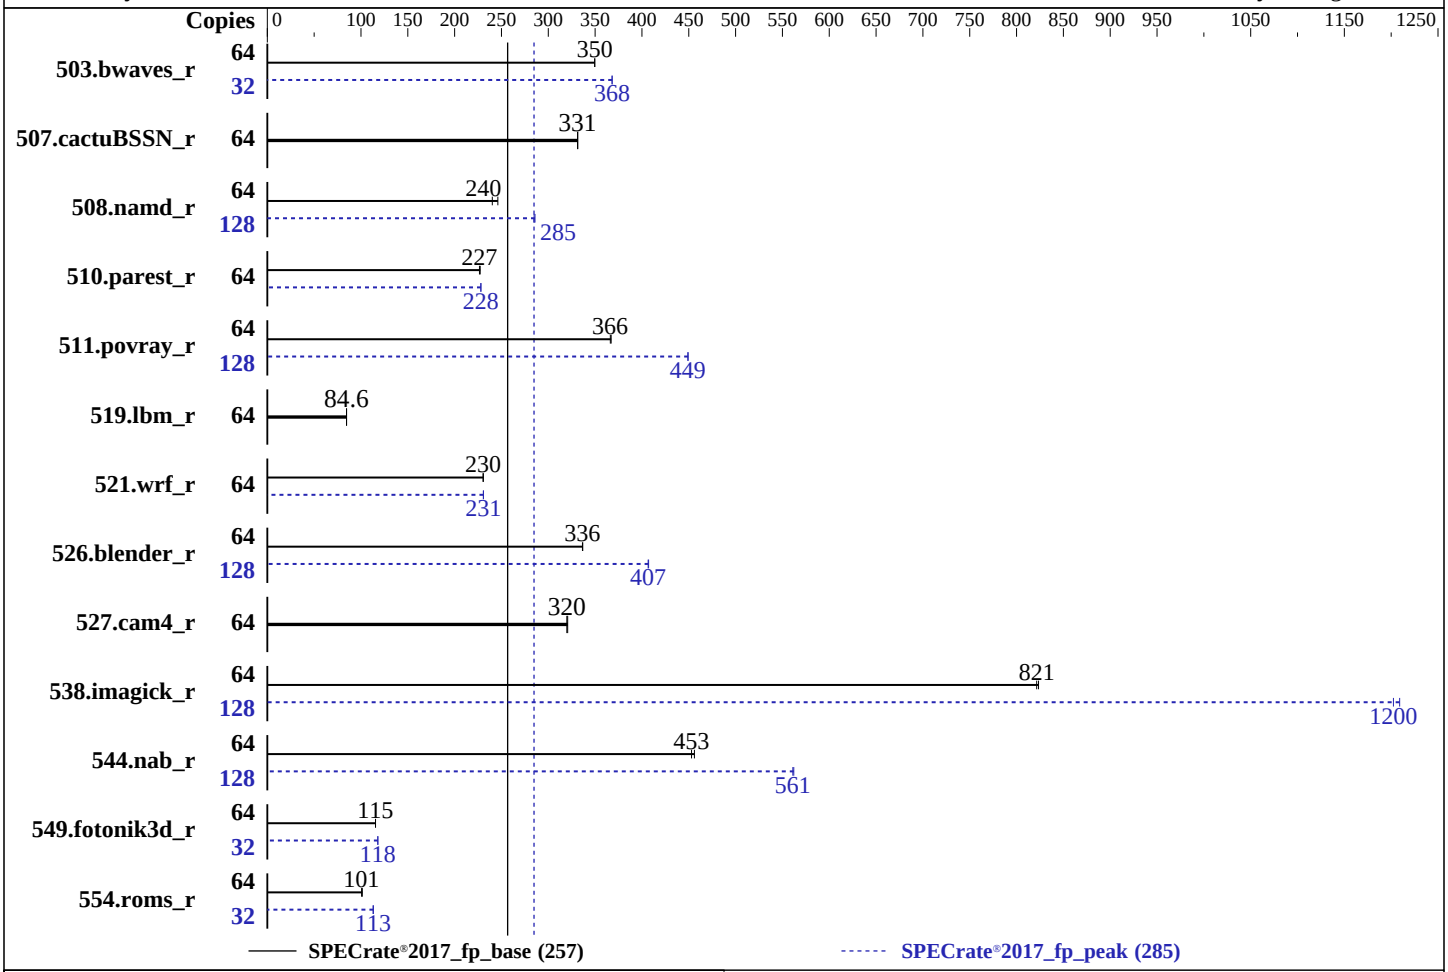

Hardware

CPU Name:	AMD EPYC 7662
Max MHz:	3300
Nominal:	2000
Enabled:	64 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-195-default
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	No
Firmware:	Version 1.2.7 released Oct-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6515 (AMD EPYC 7662, 2.00 GHz)

SPECrate®2017_fp_base = 257

SPECrate®2017_fp_peak = 285

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1836	350	**1836**	**350**			32	871	368	**872**	**368**		
507.cactuBSSN_r	64	**245**	**331**	244	332			64	**245**	**331**	244	332		
508.namd_r	64	247	246	**253**	**240**			128	**427**	**285**	425	286		
510.parest_r	64	**739**	**227**	737	227			64	**735**	**228**	734	228		
511.povray_r	64	407	367	**408**	**366**			128	**666**	**449**	665	449		
519.lbm_r	64	797	84.6	**798**	**84.6**			64	797	84.6	**798**	**84.6**		
521.wrf_r	64	621	231	**623**	**230**			64	621	231	**622**	**231**		
526.blender_r	64	**290**	**336**	289	337			128	**479**	**407**	479	407		
527.cam4_r	64	349	321	**350**	**320**			64	349	321	**350**	**320**		
538.imagick_r	64	193	823	**194**	**821**			128	**265**	**1200**	263	1210		
544.nab_r	64	**238**	**453**	236	456			128	**384**	**561**	383	562		
549.fotonik3d_r	64	**2159**	**115**	2159	116			32	**1057**	**118**	1056	118		
554.roms_r	64	**1011**	**101**	1003	101			32	**450**	**113**	449	113		

SPECrate®2017_fp_base = 257

SPECrate®2017_fp_peak = 285

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu
```

(Continued on next page)

Operating System Notes (Continued)

```
dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.0/amd_rate_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0/
     amd_rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
  NUMA Nodes Per Socket set to 4
  CCX as NUMA Domain set to Enabled
  System Profile set to Custom
  CPU Power Management set to Maximum Performance
  Memory Frequency set to Maximum Performance
  Turbo Boost Enabled
  Cstates set to Enabled
  Memory Patrol Scrub Disabled
  Memory Refresh Rate set to 1x
  PCI ASPM L1 Link Power Management Disabled
  Determinism Slider set to Power Determinism
  Efficiency Optimized Mode Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
 Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-g3ob Tue Nov  5 22:06:36 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7662 64-Core Processor
      1  "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 128
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       43 bits physical, 48 bits virtual
     CPU(s):              128
     On-line CPU(s) list: 0-127
     Thread(s) per core:  2
     Core(s) per socket:  64
     Socket(s):           1
     NUMA node(s):        16
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7662 64-Core Processor
     Stepping:            0
     CPU MHz:             1996.348
     BogoMIPS:            3992.69
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            16384K
     NUMA node0 CPU(s):   0-3,64-67
     NUMA node1 CPU(s):   4-7,68-71
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node2 CPU(s):   8-11,72-75
      NUMA node3 CPU(s):   12-15,76-79
      NUMA node4 CPU(s):   16-19,80-83
      NUMA node5 CPU(s):   20-23,84-87
      NUMA node6 CPU(s):   24-27,88-91
      NUMA node7 CPU(s):   28-31,92-95
      NUMA node8 CPU(s):   32-35,96-99
      NUMA node9 CPU(s):   36-39,100-103
      NUMA node10 CPU(s):  40-43,104-107
      NUMA node11 CPU(s):  44-47,108-111
      NUMA node12 CPU(s):  48-51,112-115
      NUMA node13 CPU(s):  52-55,116-119
      NUMA node14 CPU(s):  56-59,120-123
      NUMA node15 CPU(s):  60-63,124-127
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
      f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
      3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
      perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
      flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip
      rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 64 65 66 67
    node 0 size: 15548 MB
    node 0 free: 15284 MB
    node 1 cpus: 4 5 6 7 68 69 70 71
    node 1 size: 16096 MB
    node 1 free: 15855 MB
    node 2 cpus: 8 9 10 11 72 73 74 75
    node 2 size: 16126 MB
    node 2 free: 15915 MB
    node 3 cpus: 12 13 14 15 76 77 78 79
    node 3 size: 16125 MB
    node 3 free: 15915 MB
    node 4 cpus: 16 17 18 19 80 81 82 83
    node 4 size: 16126 MB
```


(Continued on next page)

Platform Notes (Continued)

```
node 4 free: 15916 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 16126 MB
node 5 free: 15920 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 16126 MB
node 6 free: 15918 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 16125 MB
node 7 free: 15918 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 16126 MB
node 8 free: 15884 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 16126 MB
node 9 free: 15896 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 16126 MB
node 10 free: 15910 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 16125 MB
node 11 free: 15883 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 16126 MB
node 12 free: 15907 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 16126 MB
node 13 free: 15921 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 16126 MB
node 14 free: 15919 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 16111 MB
node 15 free: 15907 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12
  9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12
 10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12
```

(Continued on next page)

Platform Notes (Continued)

```
    11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12
    12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11
    13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11
    14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11
    15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10

  From /proc/meminfo
     MemTotal:       263574096 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP1"
        VERSION_ID="15.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp1"

  uname -a:
     Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Not affected
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                           conditional, IBRS_FW, STIBP: conditional, RSB
                                            filling

  run-level 3 Nov 5 09:25 last=5

  SPEC is set to: /root/cpu2017-1.1.0
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   440G   41G  400G  10% /

  From /sys/devices/virtual/dmi/id
      BIOS:    Dell Inc. 1.2.7 10/31/2019
      Vendor:  Dell Inc.
```

(Continued on next page)

Platform Notes (Continued)

```
     Product: PowerEdge R6515
     Product Family: PowerEdge

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      8x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
      8x Not Specified Not Specified

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:
```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:
```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -z muldefs
-lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-lmvec -lamdlibm -ljemalloc -lflang

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang

510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r (continued):
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:

503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang

Benchmarks using both Fortran and C:

521.wrf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm -ljemalloc -lflang`

526.blender_r: `-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm -ljemalloc -lflang`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE8.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE8.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-05 23:06:36-0500.
Report generated on 2020-02-04 17:53:13 by CPU2017 PS formatter v6255.
Originally published on 2020-02-04.