SPEC CPU®2017 Floating Point Speed Result

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2234, 3.60 GHz

SPECspeed®2017_fp_base = 27.6

SPECspeed®2017_fp_peak = 28.0

CPU2017 License:	19	**Test Date:**	Dec-2019
Test Sponsor:	Fujitsu	**Hardware Availability:**	Oct-2019
Tested by:	Fujitsu	**Software Availability:**	Sep-2019

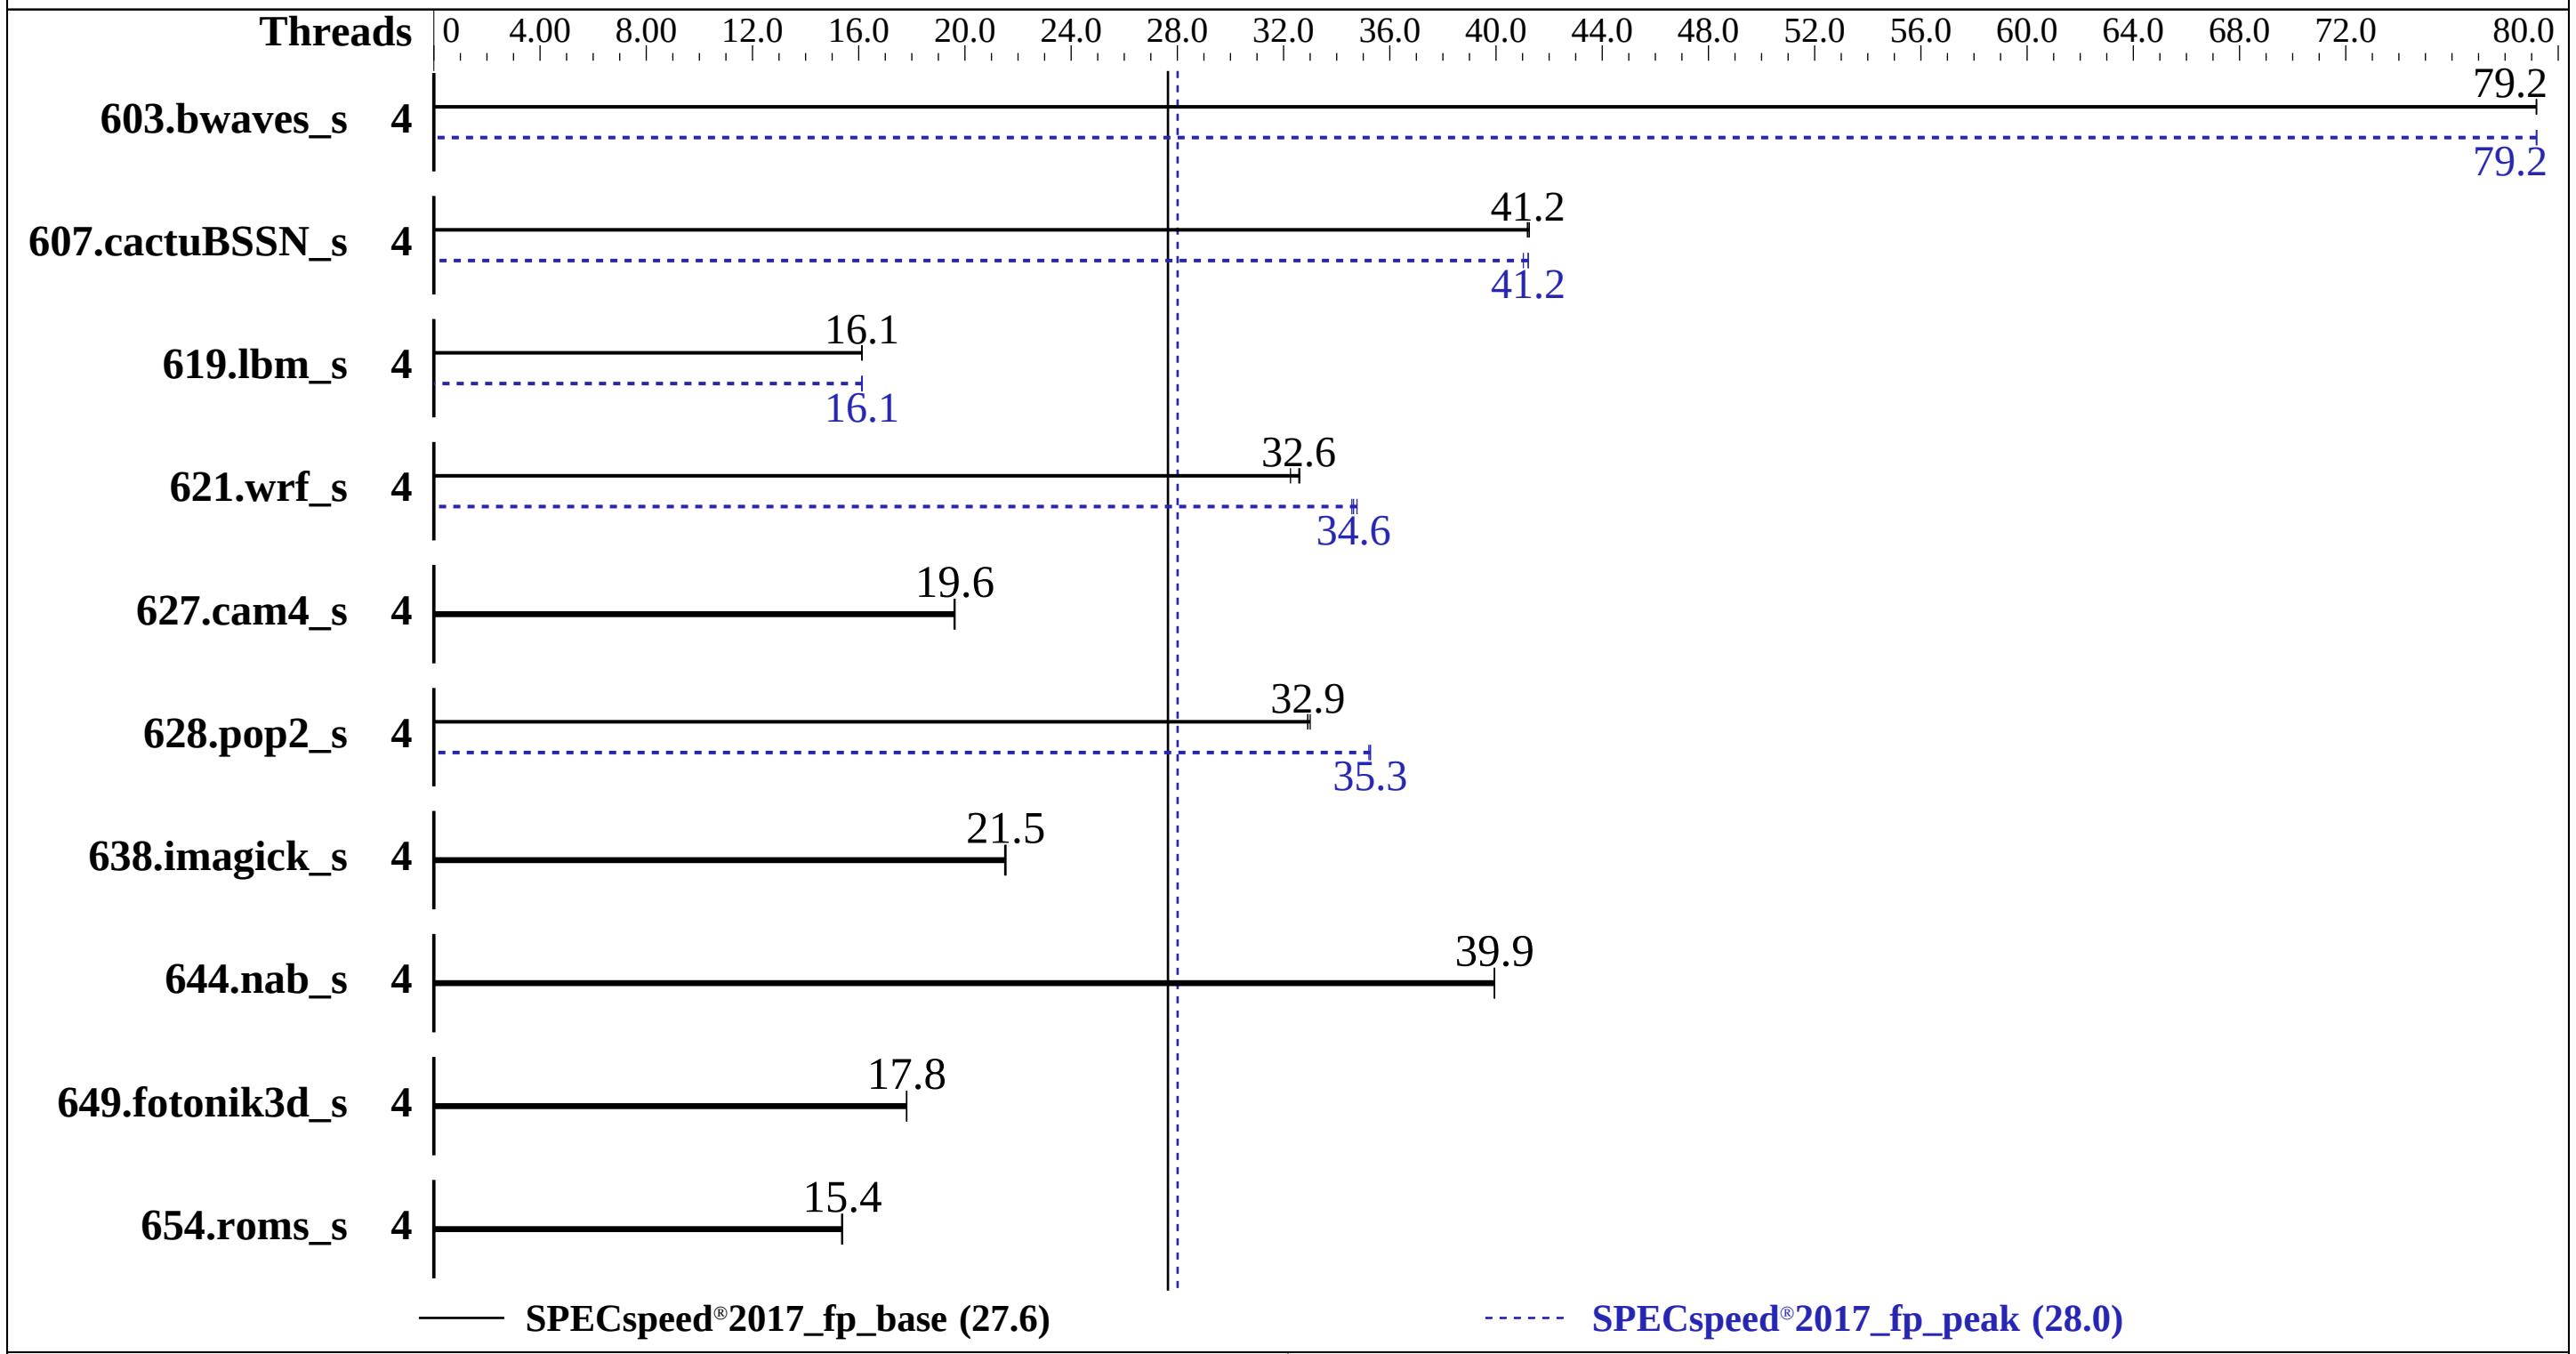

Hardware

CPU Name:	Intel Xeon E-2234
Max MHz:	4800
Nominal:	3600
Enabled:	4 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	8 MB I+D on chip per chip
Other:	None
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage:	1 x SATA M.2 SSD, 480 GB
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Fujitsu

PRIMERGY TX1330 M4, Intel Xeon E-2234, 3.60 GHz

SPECspeed®2017_fp_base = 27.6

SPECspeed®2017_fp_peak = 28.0

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Dec-2019
Hardware Availability: Oct-2019
Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	745	79.2	**745**	**79.2**	745	79.2	4	745	79.2	745	79.2	**745**	**79.2**
607.cactuBSSN_s	4	405	41.2	**405**	**41.2**	404	41.3	4	**405**	**41.2**	406	41.0	404	41.2
619.lbm_s	4	325	16.1	325	16.1	**325**	**16.1**	4	325	16.1	**325**	**16.1**	325	16.1
621.wrf_s	4	406	32.6	410	32.3	**406**	**32.6**	4	380	34.8	383	34.6	**382**	**34.6**
627.cam4_s	4	452	19.6	452	19.6	**452**	**19.6**	4	452	19.6	452	19.6	**452**	**19.6**
628.pop2_s	4	361	32.9	**361**	**32.9**	360	33.0	4	337	35.2	337	35.3	**337**	**35.3**
638.imagick_s	4	671	21.5	**670**	**21.5**	670	21.5	4	671	21.5	**670**	**21.5**	670	21.5
644.nab_s	4	**437**	**39.9**	437	39.9	437	39.9	4	**437**	**39.9**	437	39.9	437	39.9
649.fotonik3d_s	4	512	17.8	**512**	**17.8**	512	17.8	4	512	17.8	**512**	**17.8**	512	17.8
654.roms_s	4	**1024**	**15.4**	1023	15.4	1025	15.4	4	**1024**	**15.4**	1023	15.4	1025	15.4

SPECspeed®2017_fp_base = 27.6

SPECspeed®2017_fp_peak = 28.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"
OMP_STACKSIZE = "192M"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"
OMP_STACKSIZE = "192M"
echo 100000000 > sched_min_granularity_ns
echo 150000000 > sched_wakeup_granularity_ns
echo 240000000 > sched_latency_ns
Binaries compiled on a system with 1x Intel Xeon E-2288G CPU + 64 GB RAM
memory using Redhat Enterprise Linux 7.6
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
 is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Energy Efficient Turbo = Disabled
Fan Control = Full
Hyper-Threading = Disabled

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Sat Dec 21 07:46:49 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) E-2234 CPU @ 3.60GHz
      1  "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                4
     On-line CPU(s) list:   0-3
     Thread(s) per core:    1
     Core(s) per socket:    4
     Socket(s):             1
     NUMA node(s):          1
     Vendor ID:             GenuineIntel
     CPU family:            6
     Model:                 158
     Model name:            Intel(R) Xeon(R) E-2234 CPU @ 3.60GHz
     Stepping:              10
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU MHz:                4700.830
      CPU max MHz:            4800.0000
      CPU min MHz:            800.0000
      BogoMIPS:               7200.00
      Virtualization:         VT-x
      L1d cache:              32K
      L1i cache:              32K
      L2 cache:               256K
      L3 cache:               8192K
      NUMA node0 CPU(s):      0-3
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp
      tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
      erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida
      arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp flush_l1d

 /proc/cpuinfo cache data
    cache size : 8192 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.

 From /proc/meminfo
    MemTotal:       65725668 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.6 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.6"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
```

(Continued on next page)

Platform Notes (Continued)

```
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Mitigation: PTE Inversion; VMX: SMT disabled,
                                           L1D conditional cache flushes
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                  Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: Load fences, __user pointer
                                           sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: IBRS (kernel)

run-level 3 Dec 21 07:44

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   392G   44G  348G  12% /home

From /sys/devices/virtual/dmi/id
    BIOS:    FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x
              09/06/2019
    Vendor:  FUJITSU
    Product: PRIMERGY TX1330 M4
    Serial:  YMJLXXXXXX

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

603.bwaves_s: `-DSPEC_LP64`
607.cactuBSSN_s: `-DSPEC_LP64`
619.lbm_s: `-DSPEC_LP64`
621.wrf_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
627.cam4_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
628.pop2_s: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl`
638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP`

Fortran benchmarks:
`-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs`

Fujitsu
PRIMERGY TX1330 M4, Intel Xeon E-2234, 3.60 GHz

SPECspeed®2017_fp_base = 27.6
SPECspeed®2017_fp_peak = 28.0

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2019
Hardware Availability: Oct-2019
Software Availability: Sep-2019

Peak Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: basepeak = yes

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-20 17:46:49-0500.
Report generated on 2020-02-04 17:53:50 by CPU2017 PS formatter v6255.
Originally published on 2020-02-04.