# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Pentium Gold G5420, 3.80 GHz

**SPECspeed®2017_int_base = 7.22**

**SPECspeed®2017_int_peak = 7.57**

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Dec-2019
**Hardware Availability:** Oct-2019
**Software Availability:** Sep-2019

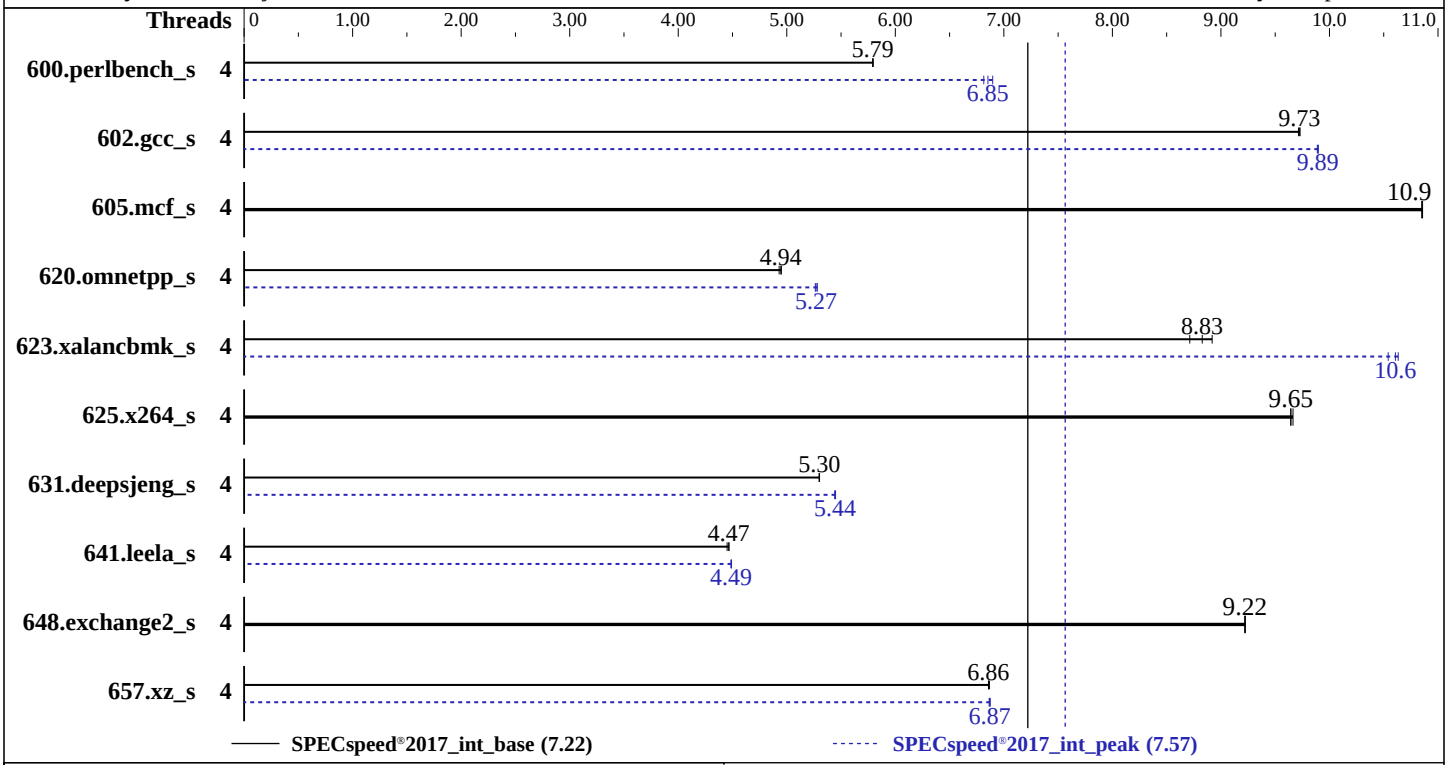


## Hardware

| | |
|---|---|
| CPU Name: | Intel Pentium Gold G5420 |
| Max MHz: | 3800 |
| Nominal: | 3800 |
| Enabled: | 2 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 256 KB I+D on chip per core |
| L3: | 4 MB I+D on chip per chip |
| Other: | None |
| Memory: | 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400) |
| Storage: | 1 x SATA M.2 SSD, 480 GB |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux Server release 7.6 (Maipo)<br>3.10.0-957.el7.x86_64 |
| Compiler: | C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;<br>Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux |
| Parallel: | Yes |
| Firmware: | Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Pentium Gold G5420, 3.80 GHz

SPECspeed®2017_int_base = 7.22

SPECspeed®2017_int_peak = 7.57

**CPU2017 License:** 19
**Test Sponsor:** Fujitsu
**Tested by:** Fujitsu

**Test Date:** Dec-2019
**Hardware Availability:** Oct-2019
**Software Availability:** Sep-2019

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 4 | 306 | 5.79 | 306 | 5.79 | **306** | **5.79** | 4 | 257 | 6.90 | 260 | 6.82 | **259** | **6.85** |
| 602.gcc_s | 4 | 410 | 9.71 | 409 | 9.73 | **409** | **9.73** | 4 | **402** | **9.89** | 402 | 9.90 | 403 | 9.89 |
| 605.mcf_s | 4 | 435 | 10.9 | 435 | 10.9 | **435** | **10.9** | 4 | 435 | 10.9 | 435 | 10.9 | **435** | **10.9** |
| 620.omnetpp_s | 4 | 331 | 4.93 | 329 | 4.95 | **330** | **4.94** | 4 | **309** | **5.27** | 309 | 5.28 | 310 | 5.26 |
| 623.xalancbmk_s | 4 | 163 | 8.71 | 159 | 8.92 | **161** | **8.83** | 4 | 133 | 10.6 | 134 | 10.5 | **134** | **10.6** |
| 625.x264_s | 4 | 183 | 9.64 | 183 | 9.66 | **183** | **9.65** | 4 | 183 | 9.64 | 183 | 9.66 | **183** | **9.65** |
| 631.deepsjeng_s | 4 | 270 | 5.30 | **270** | **5.30** | 270 | 5.30 | 4 | 263 | 5.44 | **263** | **5.44** | 263 | 5.45 |
| 641.leela_s | 4 | **382** | **4.47** | 382 | 4.47 | 383 | 4.45 | 4 | **380** | **4.49** | 380 | 4.49 | 380 | 4.49 |
| 648.exchange2_s | 4 | 319 | 9.22 | **319** | **9.22** | 319 | 9.22 | 4 | 319 | 9.22 | **319** | **9.22** | 319 | 9.22 |
| 657.xz_s | 4 | **901** | **6.86** | 900 | 6.87 | 901 | 6.86 | 4 | 901 | 6.86 | **900** | **6.87** | 899 | 6.87 |

**SPECspeed®2017_int_base = 7.22**

**SPECspeed®2017_int_peak = 7.57**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with: nohz_full=1-15
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu2017-1.1.0/lib/ia32:/home/Benchmark/speccpu2017-
     1.1.0/lib/intel64:/home/Benchmark/speccpu2017-1.1.0/je5.0.1-32:/home/Ben
     chmark/speccpu2017-1.1.0/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"
OMP_STACKSIZE = "192M"
Binaries compiled on a system with 1x Intel Xeon E-2288G CPU + 64 GB RAM
memory using Redhat Enterprise Linux 7.6
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets
```

**(Continued on next page)**

## General Notes (Continued)

```
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5
jemalloc: sources available via jemalloc.net
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Adjacent Cache Line Prefetch = Disabled
C-State Pre-Wake = Disabled
DCU Streamer Prefetcher = Disabled
DDR PowerDown and idle counter = PCODE
Energy Efficient Turbo = Disabled
Enhanced C-states = Disabled
Intel Virtualization Technology = Disabled
Native ASPM = Disabled
Package C-State un-demotion = Enabled
REFRESH_2X_MODE = 1-Enabled for WARM or HOT

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Fri Dec 13 10:54:05 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Pentium(R) Gold G5420 CPU @ 3.80GHz
      1  "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                4
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      On-line CPU(s) list:   0-3
      Thread(s) per core:    2
      Core(s) per socket:    2
      Socket(s):             1
      NUMA node(s):          1
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 158
      Model name:            Intel(R) Pentium(R) Gold G5420 CPU @ 3.80GHz
      Stepping:              10
      CPU MHz:               3800.000
      CPU max MHz:           3800.0000
      CPU min MHz:           800.0000
      BogoMIPS:              7584.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              256K
      L3 cache:              4096K
      NUMA node0 CPU(s):     0-3
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
      xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
      lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
      clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window
      hwp_epp spec_ctrl intel_stibp flush_l1d

  /proc/cpuinfo cache data
     cache size : 4096 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.

  From /proc/meminfo
     MemTotal:       65725668 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.6 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      VARIANT="Server"
      VARIANT_ID="server"
      VERSION_ID="7.6"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
   redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Mitigation: PTE Inversion
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: Load fences, __user pointer
                                          sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: IBRS (kernel)

run-level 3 Dec 13 09:01

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   392G   39G  354G  10% /home

From /sys/devices/virtual/dmi/id
    BIOS:    FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x
              09/06/2019
    Vendor:  FUJITSU
    Product: PRIMERGY TX1330 M4
    Serial:  YMJLXXXXXX

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
  19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
  64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

## Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

C++ benchmarks:
`-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:
`-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div`

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks (except as noted below):
icpc -m64

623.xalancbmk_s: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin

Fortran benchmarks:
ifort -m64

## Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

602.gcc_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-O2 -xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

605.mcf_s: `basepeak = yes`

625.x264_s: `basepeak = yes`

657.xz_s: `Same as 602.gcc_s`

C++ benchmarks:

620.omnetpp_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc`

623.xalancbmk_s: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc`

631.deepsjeng_s: `Same as 620.omnetpp_s`

641.leela_s: `Same as 620.omnetpp_s`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html`
`http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml`
`http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-12 20:54:05-0500.
Report generated on 2020-02-04 17:56:33 by CPU2017 PS formatter v6255.
Originally published on 2020-02-04.