SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6248R, 3.00GHz)

SPECrate®2017_fp_base = 262

SPECrate®2017_fp_peak = 266

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

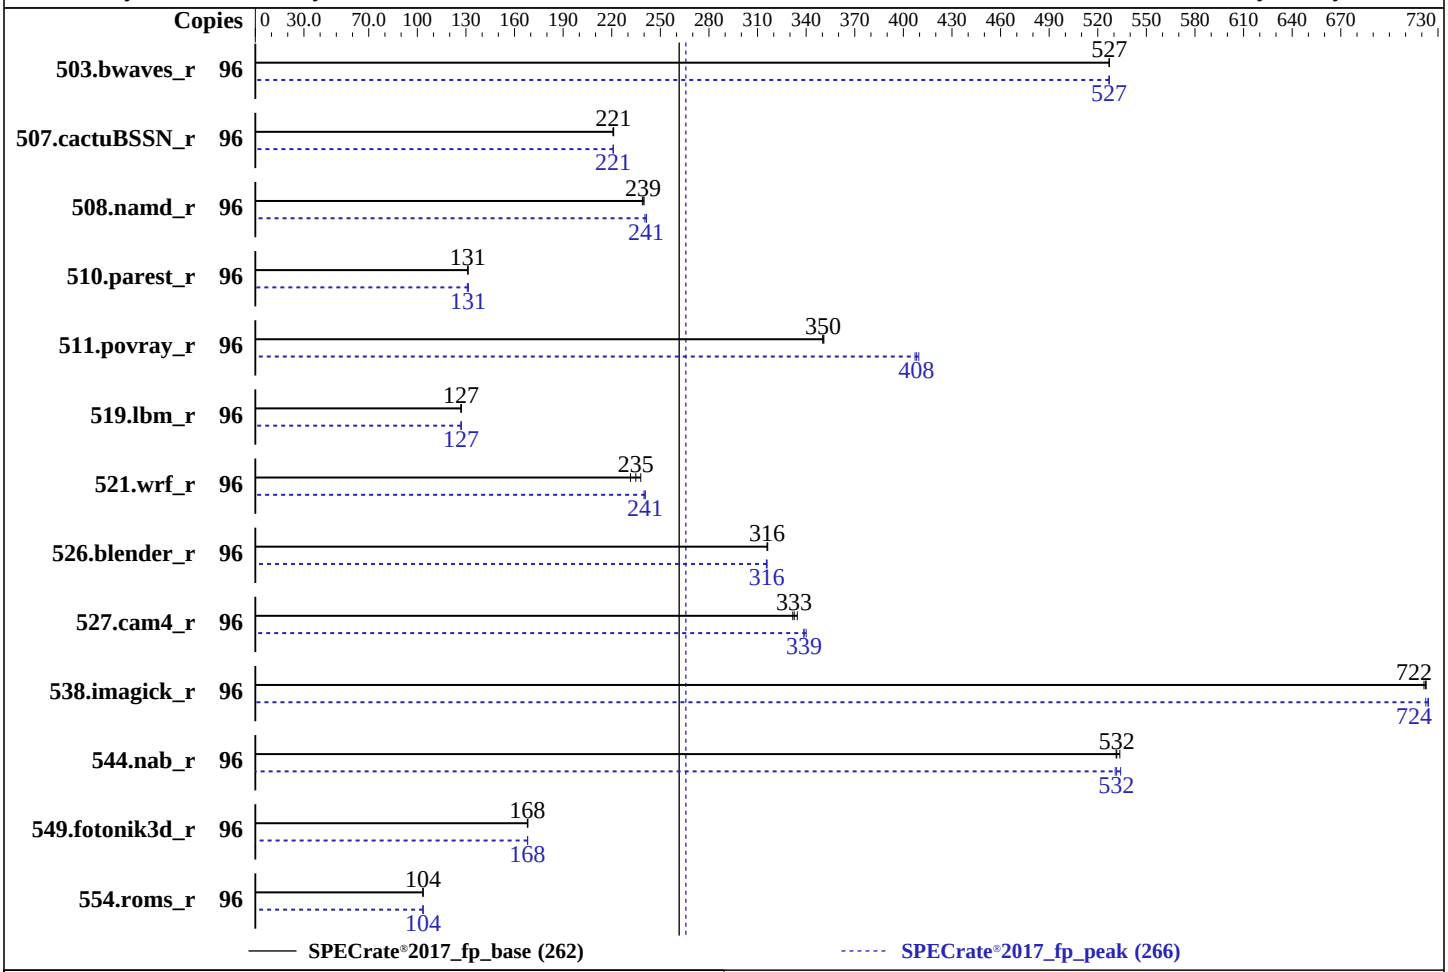

Hardware

CPU Name:	Intel Xeon Gold 6248R
Max MHz:	4000
Nominal:	3000
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	35.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933V-R)
Storage:	1 x 960 GB SSD SAS
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 (x86_64) 4.12.14-25.25-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version 4.0.4j released Aug-2019
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6248R, 3.00GHz)

SPECrate®2017_fp_base = 262

SPECrate®2017_fp_peak = 266

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1826	527	1827	527	**1826**	**527**	96	1827	527	**1827**	**527**	1826	527
507.cactuBSSN_r	96	**550**	**221**	551	221	549	221	96	550	221	**550**	**221**	550	221
508.namd_r	96	380	240	382	239	**381**	**239**	96	**378**	**241**	378	241	379	240
510.parest_r	96	1913	131	1914	131	**1914**	**131**	96	1919	131	**1912**	**131**	1910	131
511.povray_r	96	640	350	639	351	**640**	**350**	96	550	407	**549**	**408**	547	410
519.lbm_r	96	796	127	**797**	**127**	797	127	96	**797**	**127**	796	127	797	127
521.wrf_r	96	**916**	**235**	904	238	929	232	96	894	241	**894**	**241**	896	240
526.blender_r	96	463	316	**463**	**316**	462	316	96	463	315	**463**	**316**	463	316
527.cam4_r	96	502	335	506	332	**505**	**333**	96	**496**	**339**	496	339	494	340
538.imagick_r	96	331	721	**331**	**722**	330	723	96	**330**	**724**	330	724	330	722
544.nab_r	96	304	531	**304**	**532**	303	534	96	302	534	**304**	**532**	304	531
549.fotonik3d_r	96	**2226**	**168**	2228	168	2224	168	96	2226	168	2227	168	**2226**	**168**
554.roms_r	96	1473	104	1474	103	**1474**	**104**	96	1473	104	1475	103	**1473**	**104**

SPECrate®2017_fp_base = 262

SPECrate®2017_fp_peak = 266

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Intel HyperThreading Technology set to Enabled
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-l7bx Tue Feb  4 11:45:24 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
       2  "physical id"s (chips)
       96 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
       physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              96
      On-line CPU(s) list: 0-95
      Thread(s) per core:  2
      Core(s) per socket:  24
      Socket(s):           2
      NUMA node(s):        2
```

(Continued on next page)

Platform Notes (Continued)

```
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 6248R CPU @ 3.00GHz
      Stepping:            7
      CPU MHz:             3000.000
      CPU max MHz:         4000.0000
      CPU min MHz:         1200.0000
      BogoMIPS:            6000.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            36608K
      NUMA node0 CPU(s):   0-23,48-71
      NUMA node1 CPU(s):   24-47,72-95
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 36608 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 48 49 50 51
    52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
    node 0 size: 385582 MB
    node 0 free: 361425 MB
    node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 72
    73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
    node 1 size: 386822 MB
    node 1 free: 366933 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/meminfo
   MemTotal:       790942384 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15"
      VERSION_ID="15"
      PRETTY_NAME="SUSE Linux Enterprise Server 15"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
   Linux linux-l7bx 4.12.14-25.25-default #1 SMP Thu Oct 25 16:07:27 UTC 2018 (d2d8b17)
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
                                          Speculation, IBPB, IBRS_FW

run-level 5 Feb 3 23:57

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   324G   83G  241G  26% /home

From /sys/devices/virtual/dmi/id
    BIOS:    Cisco Systems, Inc. C240M5.4.0.4j.0.0831191216 08/31/2019
    Vendor:  Cisco Systems Inc
    Product: UCSC-C240-M5L
    Serial:  WZP223909MB

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
```

(Continued on next page)

Platform Notes (Continued)

```
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Fortran benchmarks:

503.bwaves_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

549.fotonik3d_r: `Same as 503.bwaves_r`

554.roms_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-04 14:45:24-0500.
Report generated on 2020-03-17 16:21:18 by CPU2017 PS formatter v6255.
Originally published on 2020-03-17.