



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

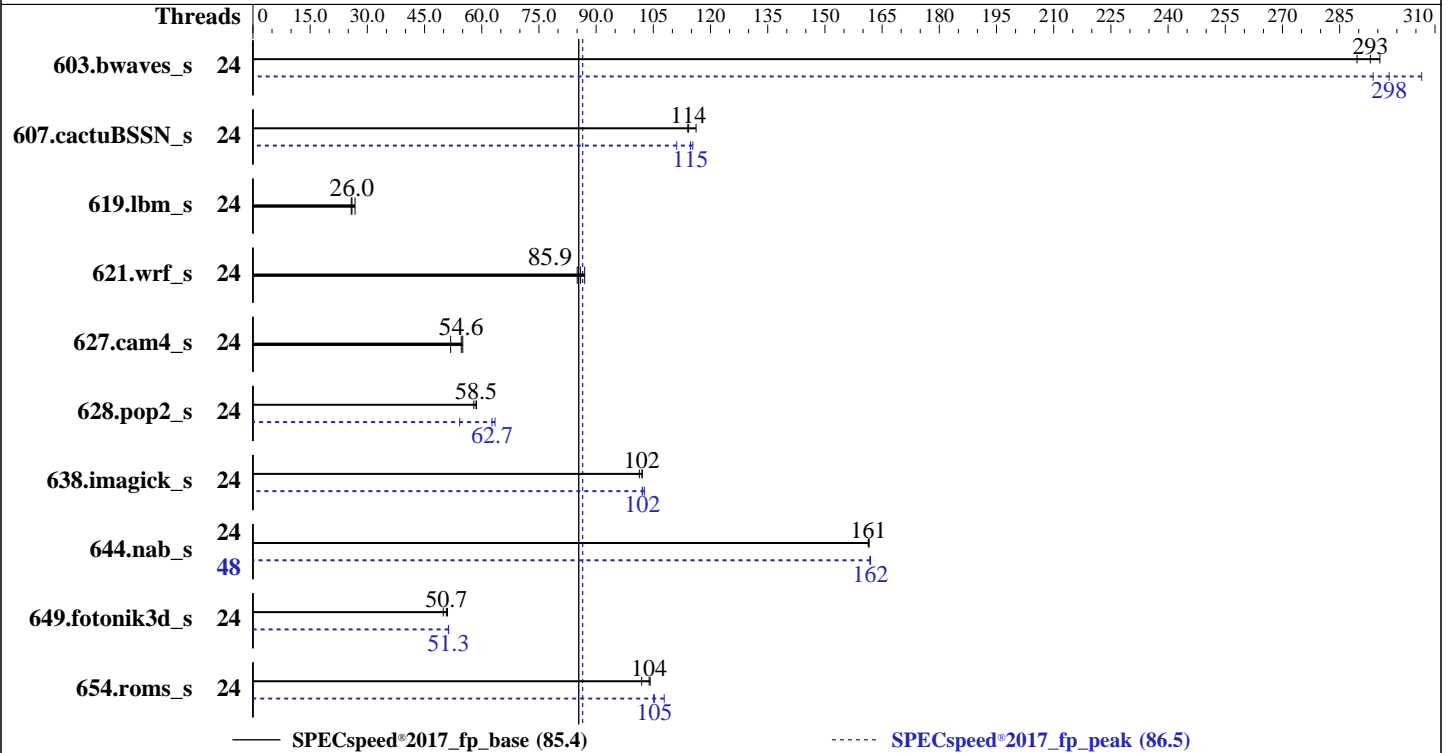

Hardware

CPU Name: AMD EPYC 7F72
 Max MHz: 3700
 Nominal: 3200
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 192 MB I+D on chip per chip, 16 MB shared / 2 cores
 Other: None
 Memory: 128 GB (8 x 16 GB 2Rx8 PC4-3200AA-R, running at 3200)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.12 released Dec-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017_fp_peak = 86.5

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	204	290	<u>201</u>	<u>293</u>	200	296	24	<u>198</u>	<u>298</u>	201	294	192	306
607.cactuBSSN_s	24	<u>146</u>	<u>114</u>	146	114	143	116	24	<u>145</u>	<u>115</u>	145	115	150	111
619.lbm_s	24	<u>202</u>	<u>26.0</u>	203	25.8	196	26.8	24	<u>202</u>	<u>26.0</u>	203	25.8	196	26.8
621.wrf_s	24	156	85.0	<u>154</u>	<u>85.9</u>	152	87.0	24	156	85.0	<u>154</u>	<u>85.9</u>	152	87.0
627.cam4_s	24	161	55.0	<u>162</u>	<u>54.6</u>	171	51.8	24	161	55.0	<u>162</u>	<u>54.6</u>	171	51.8
628.pop2_s	24	205	57.9	<u>203</u>	<u>58.5</u>	203	58.6	24	<u>189</u>	<u>62.7</u>	219	54.2	187	63.5
638.imagick_s	24	<u>141</u>	<u>102</u>	141	102	142	101	24	141	103	141	102	<u>141</u>	<u>102</u>
644.nab_s	24	108	162	108	161	<u>108</u>	<u>161</u>	48	<u>108</u>	<u>162</u>	108	162	108	162
649.fotonik3d_s	24	183	49.9	<u>180</u>	<u>50.7</u>	179	51.0	24	178	51.3	<u>178</u>	<u>51.3</u>	178	51.3
654.roms_s	24	154	102	151	104	<u>152</u>	<u>104</u>	24	<u>150</u>	<u>105</u>	150	105	146	108

SPECSpeed®2017_fp_base = 85.4

SPECSpeed®2017_fp_peak = 86.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>
```

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"

LD_LIBRARY_PATH =

"/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34
11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46
23 47"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-23"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-23"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

General Notes (Continued)

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled
Memory Interleaving set to Disabled
Memory Freq set to 3200
Fan Speed = Maximum

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Sat Jan 11 11:08:23 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7F72 24-Core Processor
 1 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Address sizes: 43 bits physical, 48 bits virtual
 CPU(s): 48
 On-line CPU(s) list: 0-47
 Thread(s) per core: 2
 Core(s) per socket: 24
 Socket(s): 1
 NUMA node(s): 12
 Vendor ID: AuthenticAMD
 CPU family: 23
 Model: 49
 Model name: AMD EPYC 7F72 24-Core Processor
 Stepping: 0
 CPU MHz: 3194.017
 Bogomips: 6388.03
 Virtualization: AMD-V
 L1d cache: 32K
 L1i cache: 32K
 L2 cache: 512K
 L3 cache: 16384K
 NUMA node0 CPU(s): 0,1,24,25
 NUMA node1 CPU(s): 2,3,26,27
 NUMA node2 CPU(s): 4,5,28,29
 NUMA node3 CPU(s): 6,7,30,31
 NUMA node4 CPU(s): 8,9,32,33
 NUMA node5 CPU(s): 10,11,34,35
 NUMA node6 CPU(s): 12,13,36,37
 NUMA node7 CPU(s): 14,15,38,39
 NUMA node8 CPU(s): 16,17,40,41
 NUMA node9 CPU(s): 18,19,42,43
 NUMA node10 CPU(s): 20,21,44,45
 NUMA node11 CPU(s): 22,23,46,47

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
 pat pse36 clflush mmx fxsr sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
 constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
 pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
 rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
 osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
 cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
 bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
 lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
 pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

physical chip.

available: 12 nodes (0-11)

node 0 cpus: 0 1 24 25

node 0 size: 10171 MB

node 0 free: 10088 MB

node 1 cpus: 2 3 26 27

node 1 size: 10751 MB

node 1 free: 10669 MB

node 2 cpus: 4 5 28 29

node 2 size: 10750 MB

node 2 free: 10699 MB

node 3 cpus: 6 7 30 31

node 3 size: 10749 MB

node 3 free: 10675 MB

node 4 cpus: 8 9 32 33

node 4 size: 10751 MB

node 4 free: 10699 MB

node 5 cpus: 10 11 34 35

node 5 size: 10751 MB

node 5 free: 10630 MB

node 6 cpus: 12 13 36 37

node 6 size: 10749 MB

node 6 free: 10708 MB

node 7 cpus: 14 15 38 39

node 7 size: 10751 MB

node 7 free: 10709 MB

node 8 cpus: 16 17 40 41

node 8 size: 10751 MB

node 8 free: 10720 MB

node 9 cpus: 18 19 42 43

node 9 size: 10719 MB

node 9 free: 10685 MB

node 10 cpus: 20 21 44 45

node 10 size: 10751 MB

node 10 free: 10668 MB

node 11 cpus: 22 23 46 47

node 11 size: 10738 MB

node 11 free: 10687 MB

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11
0:	10	11	11	11	11	11	11	11	11	11	11	11
1:	11	10	11	11	11	11	11	11	11	11	11	11
2:	11	11	10	11	11	11	11	11	11	11	11	11
3:	11	11	11	10	11	11	11	11	11	11	11	11
4:	11	11	11	11	10	11	11	11	11	11	11	11
5:	11	11	11	11	11	10	11	11	11	11	11	11
6:	11	11	11	11	11	11	10	11	11	11	11	11

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

7:  11  11  11  11  11  11  11  11  10  11  11  11  11
8:  11  11  11  11  11  11  11  11  11  10  11  11  11
9:  11  11  11  11  11  11  11  11  11  11  10  11  11
10: 11  11  11  11  11  11  11  11  11  11  11  10  11
11: 11  11  11  11  11  11  11  11  11  11  11  11  10

```

From /proc/meminfo

```

MemTotal:      131470852 kB
HugePages_Total:       0
Hugepagesize:       2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

uname -a:

```

Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

```

run-level 3 Nov 25 11:34 last=5

SPEC is set to: /root/cpu2017-1.1.0

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   440G   36G  405G   9% /

```

From /sys/devices/virtual/dmi/id

```

BIOS:      Dell Inc. 1.2.12 12/12/2019
Vendor:    Dell Inc.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Product: PowerEdge R6515
Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 80AD80B380AD HMA82GR7CJR8N-XN 16 GB 2 rank 3200
8x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
644.nab_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====

```

```

-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

```

Fortran benchmarks:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

```

Benchmarks using both Fortran and C:

```

-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```

-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang

```

Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

```
638.imagick_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
603.bwaves_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

```
628.pop2_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 85.4

PowerEdge R6515 (AMD EPYC 7F72, 3.20 GHz)

SPECspeed®2017_fp_peak = 86.5

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec  
-lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE8.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-11 12:08:22-0500.

Report generated on 2020-04-14 15:18:34 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.