



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3


**Test Date:** Apr-2020

**Test Sponsor:** HPE

**Hardware Availability:** Dec-2019

**Tested by:** HPE

**Software Availability:** Aug-2019

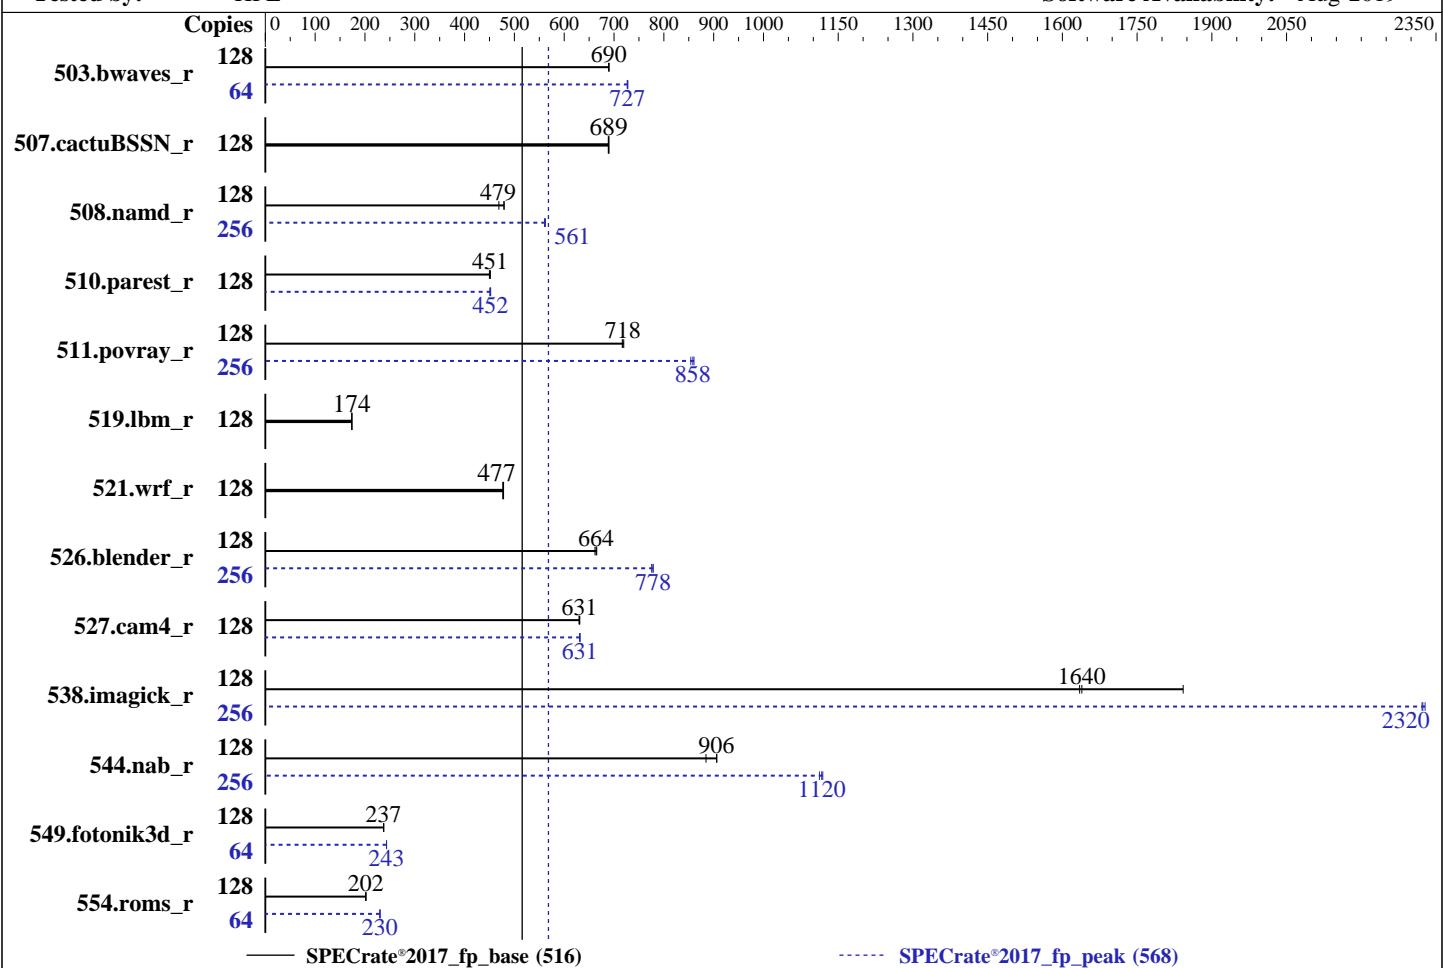

— Specrate®2017\_fp\_base (516)  
- - - Specrate®2017\_fp\_peak (568)

## Hardware

CPU Name: AMD EPYC 7742  
Max MHz: 3400  
Nominal: 2250  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
16 MB shared / 4 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
Storage: 1 x 800 GB SAS SSD, RAID 0  
Other: None

## OS:

SUSE Linux Enterprise Server 15 (x86\_64) SP1  
Kernel 4.12.14-195-default

## Compiler:

C/C++/Fortran: Version 2.0.0 of AOCC

## Parallel:

No

## Firmware:

HPE BIOS Version A42 04/02/2020 released Apr-2020

## File System:

btrfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

jemalloc: jemalloc memory allocator library v5.2.0

## Power Management:

BIOS set to prefer performance at the cost of additional power usage

## Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

Test Date: Apr-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1862	689	<b>1861</b>	<b>690</b>	1861	690	64	883	726	<b>883</b>	<b>727</b>	882	728
507.cactubSSN_r	128	235	690	<b>235</b>	<b>689</b>	235	688	128	235	690	<b>235</b>	<b>689</b>	235	688
508.namd_r	128	259	469	254	480	<b>254</b>	<b>479</b>	256	433	562	434	560	<b>433</b>	<b>561</b>
510.parest_r	128	<b>742</b>	<b>451</b>	744	450	742	452	128	743	451	740	452	<b>741</b>	<b>452</b>
511.povray_r	128	417	717	415	720	<b>416</b>	<b>718</b>	256	695	861	<b>697</b>	<b>858</b>	700	854
519.lbm_r	128	778	173	<b>777</b>	<b>174</b>	776	174	128	778	173	<b>777</b>	<b>174</b>	776	174
521.wrf_r	128	600	478	601	477	<b>601</b>	<b>477</b>	128	600	478	601	477	<b>601</b>	<b>477</b>
526.blender_r	128	<b>294</b>	<b>664</b>	295	662	293	665	256	<b>501</b>	<b>778</b>	503	775	501	779
527.cam4_r	128	356	630	<b>355</b>	<b>631</b>	355	631	128	355	631	<b>355</b>	<b>631</b>	354	632
538.imagick_r	128	173	1840	<b>194</b>	<b>1640</b>	195	1630	256	273	2330	274	2320	<b>274</b>	<b>2320</b>
544.nab_r	128	<b>238</b>	<b>906</b>	238	906	244	885	256	<b>386</b>	<b>1120</b>	385	1120	387	1110
549.fotonik3d_r	128	2100	237	2099	238	<b>2100</b>	<b>237</b>	64	<b>1025</b>	<b>243</b>	1025	243	1025	243
554.roms_r	128	1010	201	1007	202	<b>1008</b>	<b>202</b>	64	443	230	<b>442</b>	<b>230</b>	442	230

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-bbn/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017-bbn/amd_
    rate_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fno-jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS Configuration

Thermal Configuration set to Maximum Cooling

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Minimum Processor Idle Power Core C-State set to C6 State

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

NUMA memory domains per socket set to Four memory domains per socket

C-State Efficiency mode set to Enabled

Package Power Limit Control Mode set to Manual

Package Power Limit value set to 240

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Date: Apr-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Platform Notes (Continued)

```
Sysinfo program /home/cpu2017-bbn/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-30t0 Fri Feb 15 05:54:40 2019
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7742 64-Core Processor
  2 "physical id"s (chips)
  256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings   : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                256
On-line CPU(s) list:  0-255
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7742 64-Core Processor
Stepping:               0
CPU MHz:                2245.856
BogoMIPS:              4491.71
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:                512K
L3 cache:                16384K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

**Test Date:** Apr-2020

Test Sponsor: HPE

**Hardware Availability:** Dec-2019

Tested by: HPE

**Software Availability:** Aug-2019

## Platform Notes (Continued)

```

NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperf fm perf_pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx
f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse
3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_l2 mwaitx cpb cat_13 cdp_13 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase
bmil avx2 smep bmi2 cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec
xgetbv1 xsaves cqmq_llc cqmq_occu_llc cqmq_mbm_total cqmq_mbm_local clzero irperf
xsaveerptr arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmlload vgif umip rdpid
overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136
137 138 139 140 141 142 143
node 0 size: 128706 MB
node 0 free: 128173 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149
150 151 152 153 154 155 156 157 158 159
node 1 size: 128987 MB
node 1 free: 128520 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165
166 167 168 169 170 171 172 173 174 175
node 2 size: 129016 MB
node 2 free: 128545 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
182 183 184 185 186 187 188 189 190 191
node 3 size: 129004 MB
node 3 free: 128405 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
198 199 200 201 202 203 204 205 206 207
node 4 size: 129016 MB
node 4 free: 128560 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Date: Apr-2020

Test Sponsor: HPE

Hardware Availability: Dec-2019

Tested by: HPE

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 5 size: 129016 MB
node 5 free: 128522 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226
227 228 229 230 231 232 233 234 235 236 237 238 239
node 6 size: 129016 MB
node 6 free: 128555 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
242 243 244 245 246 247 248 249 250 251 252 253 254 255
node 7 size: 129014 MB
node 7 free: 128565 MB
node distances:
node   0    1    2    3    4    5    6    7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      1056543496 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-30t0 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retrpline, IBPB: conditional, IBRS\_FW, STIBP: conditional, RSB filling

run-level 3 Feb 14 19:51

SPEC is set to: /home/cpu2017-bbn

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc2	btrfs	743G	26G	716G	4%	/home

From /sys/devices/virtual/dmi/id

BIOS: HPE A42 04/02/2020  
Vendor: HPE  
Product: ProLiant DL385 Gen10 Plus  
Product Family: ProLiant  
Serial: CN79340HC5

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200  
16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

=====

C++	508.namd_r(base, peak) 510.parest_r(base, peak)
-----	---

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Apr-2020

**Hardware Availability:** Dec-2019

**Software Availability:** Aug-2019

## Compiler Version Notes (Continued)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

---

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

---

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

**SPECrate®2017\_fp\_base = 516**

**SPECrate®2017\_fp\_peak = 568**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

<b>Hewlett Packard Enterprise</b> (Test Sponsor: HPE) ProLiant DL385 Gen10 Plus (2.25 GHz, AMD EPYC 7742)	<b>SPECrate®2017_fp_base = 516</b> <b>SPECrate®2017_fp_peak = 568</b>
<b>CPU2017 License:</b> 3 <b>Test Sponsor:</b> HPE <b>Tested by:</b> HPE	<b>Test Date:</b> Apr-2020 <b>Hardware Availability:</b> Dec-2019 <b>Software Availability:</b> Aug-2019

## Base Optimization Flags (Continued)

### Benchmarks using both Fortran and C:

```
-fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs  
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc -lflang
```

### Benchmarks using both C and C++:

## Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

## C benchmarks: clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: -fsto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fvl-function-specialization -lmvec -lamdlibm -ljemalloc  
-lflang

544.nab\_r: Same as 538.imagick\_r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
508.namd_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

```
510.parest_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -Ofast -march=znver2
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

```
503.bwaves_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -lmvec -lamdlibm -ljemalloc
-lflang
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -lmvec -lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

554.roms\_r (continued):

-lflang

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

```
527.cam4_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -lmvec
-lamdlibm -ljemalloc -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

```
526.blender_r: -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus  
(2.25 GHz, AMD EPYC 7742)

SPECrate®2017\_fp\_base = 516

SPECrate®2017\_fp\_peak = 568

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2020

Hardware Availability: Dec-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

526.blender\_r (continued):

```
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000 -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.html>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revH.xml>  
<http://www.spec.org/cpu2017/flags/aocc200-flags-C1-HPE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-02-14 19:24:39-0500.

Report generated on 2020-04-28 15:30:01 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-28.