



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Silver 4214)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation


**SPECrate®2017\_int\_base = 135**

**SPECrate®2017\_int\_peak = 140**

**Test Date:** Apr-2020

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

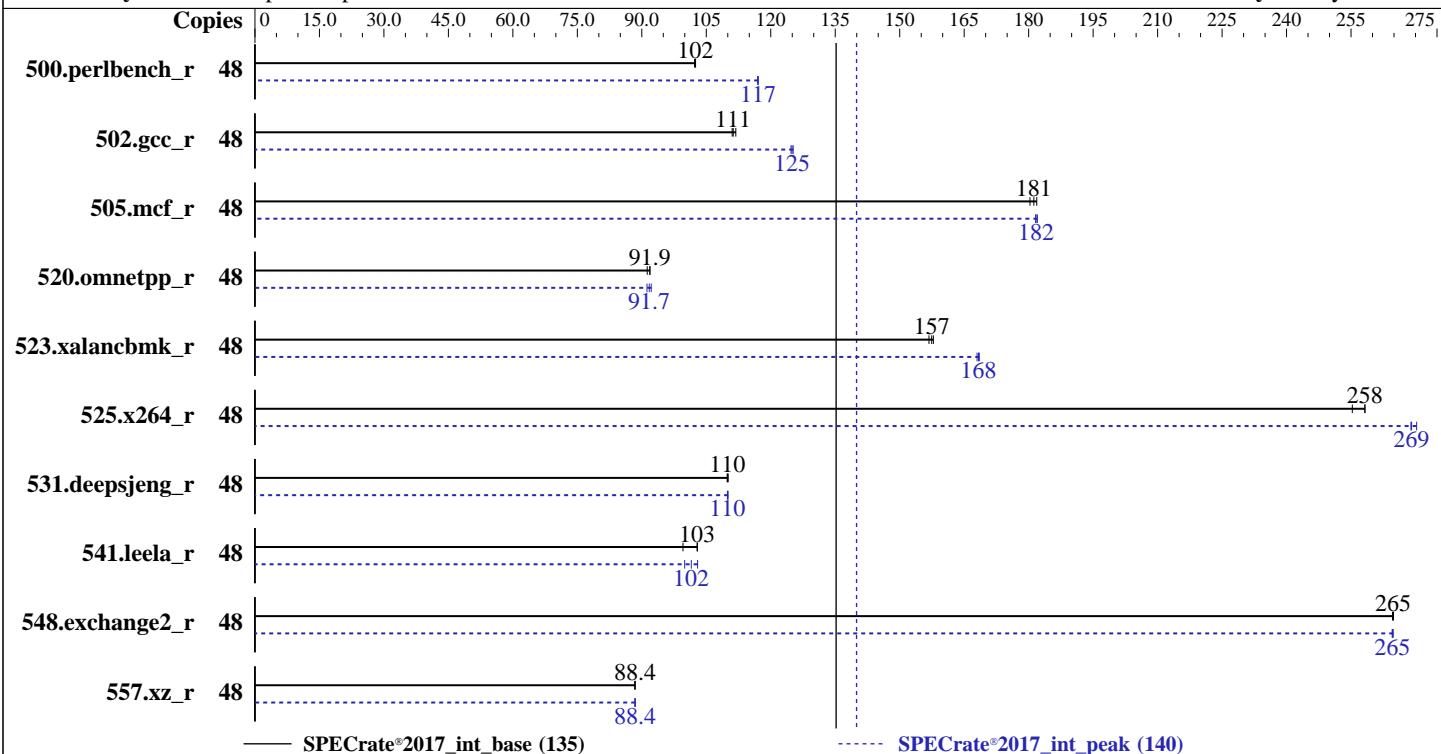

### Hardware

CPU Name: Intel Xeon Silver 4214  
 Max MHz: 3200  
 Nominal: 2200  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 2 TB NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 4.1.5 released May-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Silver 4214)

**SPECrate®2017\_int\_base = 135**

**SPECrate®2017\_int\_peak = 140**

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	746	103	747	102	<b>746</b>	<b>102</b>	48	<b>653</b>	<b>117</b>	653	117	653	117
502.gcc_r	48	608	112	<b>611</b>	<b>111</b>	612	111	48	545	125	<b>544</b>	<b>125</b>	543	125
505.mcf_r	48	426	182	430	180	<b>428</b>	<b>181</b>	48	427	182	<b>427</b>	<b>182</b>	426	182
520.omnetpp_r	48	690	91.3	685	91.9	<b>686</b>	<b>91.9</b>	48	683	92.2	690	91.2	<b>687</b>	<b>91.7</b>
523.xalancbmk_r	48	321	158	323	157	<b>322</b>	<b>157</b>	48	302	168	<b>301</b>	<b>168</b>	301	169
525.x264_r	48	325	258	329	255	<b>326</b>	<b>258</b>	48	<b>312</b>	<b>269</b>	313	269	311	270
531.deepsjeng_r	48	501	110	500	110	<b>501</b>	<b>110</b>	48	500	110	500	110	<b>500</b>	<b>110</b>
541.leela_r	48	<b>773</b>	<b>103</b>	772	103	798	99.6	48	<b>783</b>	<b>102</b>	772	103	795	100
548.exchange2_r	48	<b>475</b>	<b>265</b>	475	265	475	265	48	475	265	475	265	<b>475</b>	<b>265</b>
557.xz_r	48	586	88.4	586	88.4	<b>586</b>	<b>88.4</b>	48	586	88.4	586	88.5	<b>586</b>	<b>88.4</b>

**SPECrate®2017\_int\_base = 135**

**SPECrate®2017\_int\_peak = 140**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
SCALING\_GOVERNOR set to Performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-
  32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECCrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5,  
and the system compiler gcc 4.8.5;  
sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

C1E Support set to Disable

IMC (Integrated memory controller) Interleaving set to 2-way

Sub NUMA Cluster (SNC) set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-nlir Thu Apr 30 14:36:44 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECCrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 48  
On-line CPU(s) list: 0-47  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz  
Stepping: 6  
CPU MHz: 2200.000  
CPU max MHz: 3200.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 16896K  
NUMA node0 CPU(s): 0-11,24-35  
NUMA node1 CPU(s): 12-23,36-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35  
node 0 size: 385579 MB  
node 0 free: 385030 MB  
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35  
node 1 size: 386820 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_base = 135

SPECrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

```
node 1 free: 386095 MB
node distances:
node 0 1
0: 10 21
1: 21 10

From /proc/meminfo
MemTotal:      790938124 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux linux-nlir 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted
Speculation, IBPB, IBRS_FW

run-level 3 Apr 30 14:36 last=5
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECCrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfs	1.8T	50G	1.8T	3%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 4.1.5 05/21/2019  
Vendor: Inspur  
Product: NF5280M5  
Serial: 219243921

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECCrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
=====  
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)  
| 525.x264_r(base, peak) 557.xz_r(base, peak)  
=====
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 523.xalancbmk_r(peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 523.xalancbmk_r(peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
=====
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----
```

```
=====  
Fortran | 548.exchange2_r(base, peak)  
=====
```

```
-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_base = 135

SPECrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc\_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk\_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECCrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

## Peak Optimization Flags (Continued)

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

502.gcc\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate®2017\_int\_base = 135

Inspur NF5180M5 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 140

CPU2017 License: 3358

Test Date: Apr-2020

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-30 02:36:43-0400.

Report generated on 2020-06-09 16:06:09 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-09.