



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

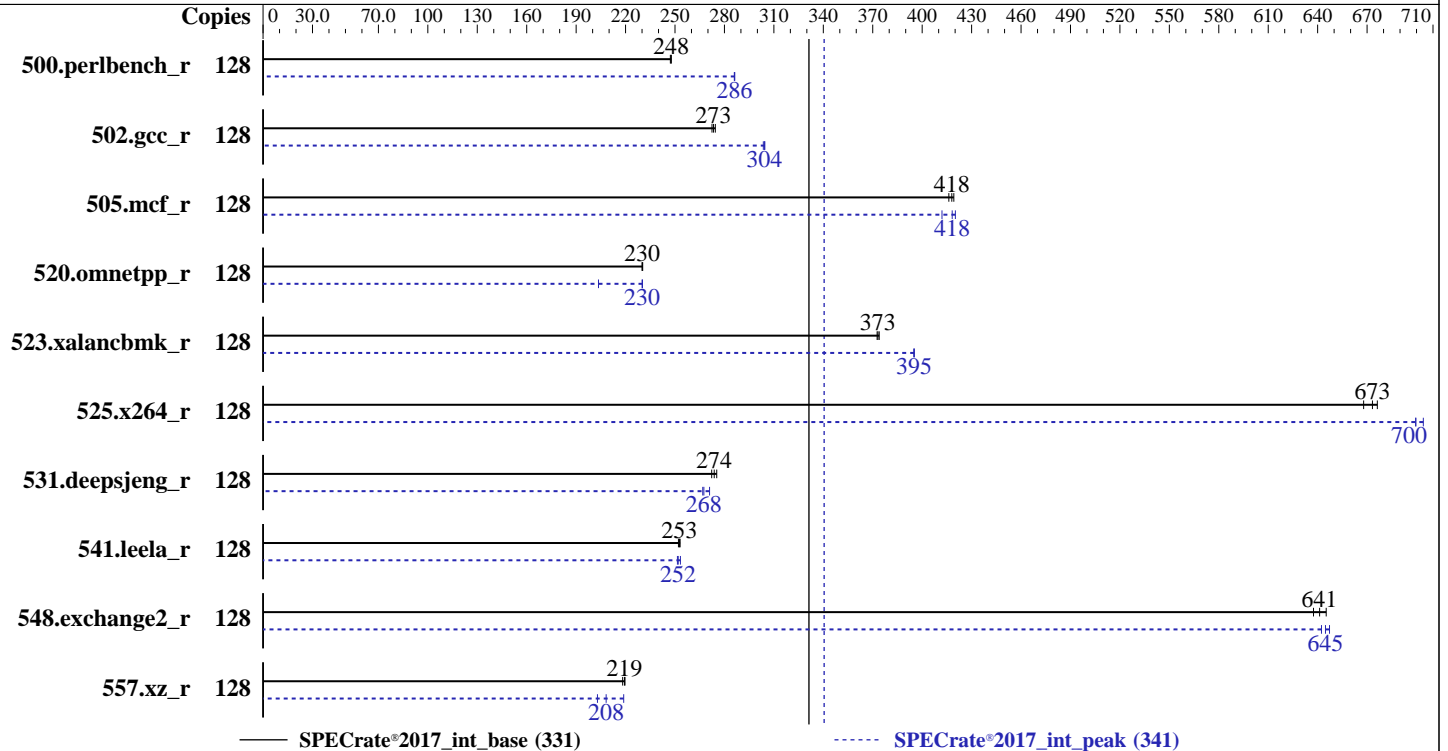

Hardware

CPU Name: Intel Xeon Gold 6130
 Max MHz: 3700
 Nominal: 2100
 Enabled: 64 cores, 4 chips, 2 threads/core
 Orderable: 1,2,3,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)
 Storage: 1 x 800 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
 3.10.0-957.el7.x86_64
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Version 2.00.39 released Mar-2020 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	128	823	248	824	247	823	248	128	<u>712</u>	<u>286</u>	712	286	713	286		
502.gcc_r	128	660	274	663	273	665	272	128	<u>595</u>	<u>304</u>	595	304	597	304		
505.mcf_r	128	495	418	497	416	493	419	128	492	420	495	418	502	412		
520.omnetpp_r	128	730	230	729	230	730	230	128	729	230	730	230	825	204		
523.xalancbmk_r	128	363	373	362	373	361	374	128	342	395	342	395	342	395		
525.x264_r	128	331	676	336	668	333	673	128	318	704	320	699	320	700		
531.deepsjeng_r	128	533	275	536	274	539	272	128	541	271	548	268	550	267		
541.leela_r	128	841	252	837	253	839	253	128	843	251	841	252	837	253		
548.exchange2_r	128	520	645	523	641	526	637	128	520	645	522	642	518	647		
557.xz_r	128	629	220	633	218	630	219	128	632	219	664	208	681	203		

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set SNC to Enabled

Set IMC Interleaving to 1-way Interleave

Set XPT Prefetcher to Enabled

sysinfo program /home/speccpu/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Mon Jun 8 17:52:48 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
```

```
4 "physical id"s (chips)
```

```
128 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
```

```
siblings : 32
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

```
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 128

On-line CPU(s) list: 0-127

Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

SPECrate®2017_int_peak = 341

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Platform Notes (Continued)

```

Core(s) per socket:      16
Socket(s):               4
NUMA node(s):           8
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:                4
CPU MHz:                 1175.354
CPU max MHz:             3700.0000
CPU min MHz:             1000.0000
BogoMIPS:                4200.00
Virtualization:          VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                22528K
NUMA node0 CPU(s):      0-3,8-11,64-67,72-75
NUMA node1 CPU(s):      4-7,12-15,68-71,76-79
NUMA node2 CPU(s):      16-19,24-27,80-83,88-91
NUMA node3 CPU(s):      20-23,28-31,84-87,92-95
NUMA node4 CPU(s):      32-35,40-43,96-99,104-107
NUMA node5 CPU(s):      36-39,44-47,100-103,108-111
NUMA node6 CPU(s):      48-51,56-59,112-115,120-123
NUMA node7 CPU(s):      52-55,60-63,116-119,124-127
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
intel_pt ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
node 0 size: 47776 MB
node 0 free: 46290 MB
node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Platform Notes (Continued)

```

node 1 size: 49152 MB
node 1 free: 47772 MB
node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
node 2 size: 49152 MB
node 2 free: 47917 MB
node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
node 3 size: 49152 MB
node 3 free: 47666 MB
node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
node 4 size: 49152 MB
node 4 free: 47924 MB
node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
node 5 size: 49152 MB
node 5 free: 47826 MB
node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
node 6 size: 49152 MB
node 6 free: 47868 MB
node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
node 7 size: 49152 MB
node 7 free: 47721 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  21  21
  1:  11  10  21  21  21  21  21  21
  2:  21  21  10  11  21  21  21  21
  3:  21  21  11  10  21  21  21  21
  4:  21  21  21  21  10  11  21  21
  5:  21  21  21  21  11  10  21  21
  6:  21  21  21  21  21  21  10  11
  7:  21  21  21  21  21  21  11  10

```

From /proc/meminfo

MemTotal: 394632144 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.6 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VARIANT="Server"

VARIANT_ID="server"

VERSION_ID="7.6"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"

redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

SPECrate®2017_int_peak = 341

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion; VMX: SMT vulnerable, L1D conditional cache flushes
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: IBRS (kernel)

run-level 3 Jun 8 17:50 last=5

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	690G	58G	633G	9%	/home

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. 2.00.39 03/24/2020
Vendor: New H3C Technologies Co., Ltd.
Product: UniServer R6700 G3
Serial: 210200A01SH18B000020
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
24x Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933, configured at 2666
24x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 523.xalanbmk_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Compiler Version Notes (Continued)

=====
C++ | 523.xalancbmk_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502 gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r.icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r.icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

```

C++ benchmarks:

```

520.omnetpp_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

(Test Sponsor: New H3C Technologies Co., Ltd.)

SPECrate®2017_int_base = 331

SPECrate®2017_int_peak = 341

H3C UniServer R6700 G3 (Intel Xeon Gold 6130)

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020

Hardware Availability: Mar-2019

Software Availability: May-2019

Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-08 05:52:47-0400.

Report generated on 2020-06-23 18:10:50 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.