



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 5036


**Test Date:** May-2020

**Test Sponsor:** Peng Cheng Laboratory

**Hardware Availability:** Jun-2019

**Tested by:** Peng Cheng Laboratory

**Software Availability:** Jul-2020

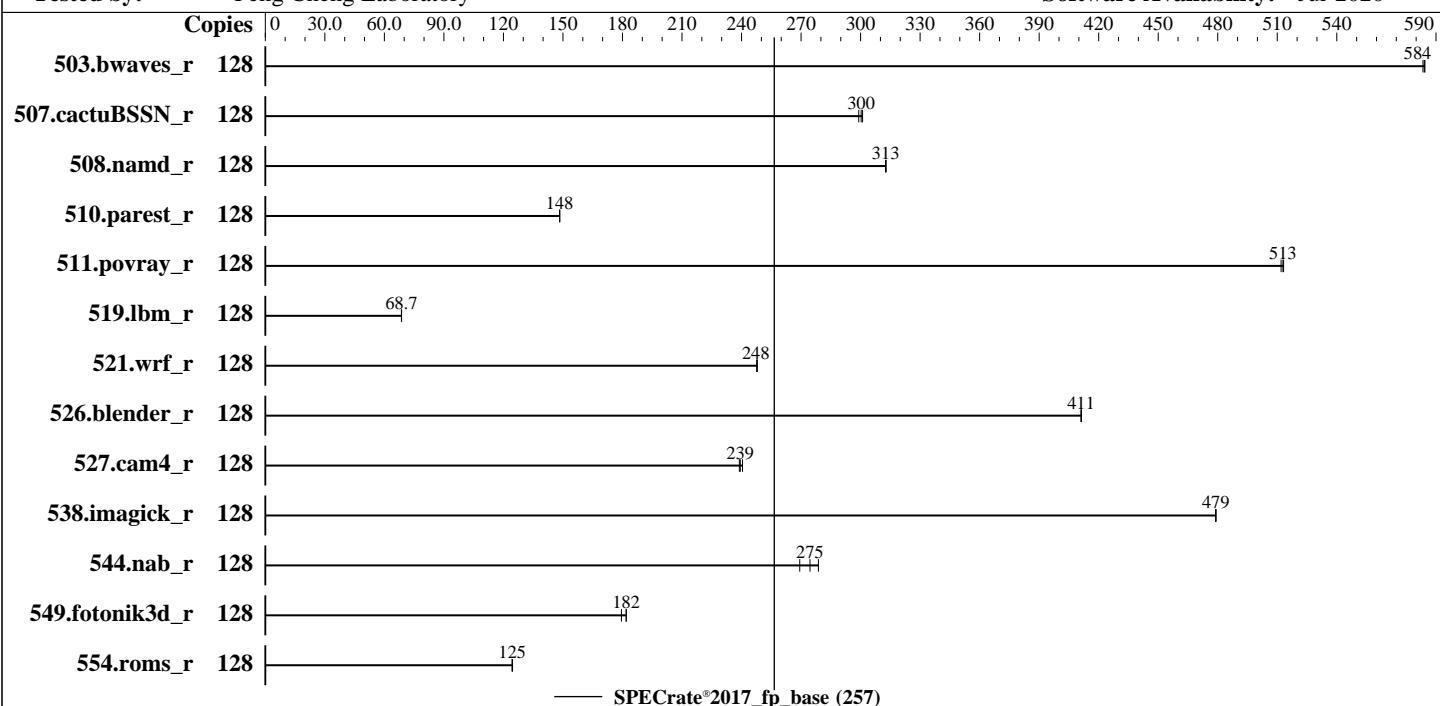

## Hardware

CPU Name: Huawei Kunpeng 920 7260  
Max MHz: 2600  
Nominal: 2600  
Enabled: 128 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 64 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 1.92 TB SAS SSD  
Other: None

## Software

OS: kylin release 10 (Azalea)  
Compiler: 4.19.90-5.ky10.aarch64  
Parallel: C/C++/Fortran: Version 9.1.0 of GCC, the GNU Compiler Collection  
Firmware: No  
File System: Huawei Corp. Version 1.16 released Feb-2020  
System State: xfs  
Base Pointers: Run level 5 (multi-user graphical)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: None  
BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 5036

Test Sponsor: Peng Cheng Laboratory

Tested by: Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>2197</b>	<b>584</b>	2196	584	2200	583							
507.cactuBSSN_r	128	538	301	<b>540</b>	<b>300</b>	542	299							
508.namd_r	128	<b>389</b>	<b>313</b>	389	313	389	313							
510.parest_r	128	<b>2258</b>	<b>148</b>	2258	148	2256	148							
511.povray_r	128	584	512	582	513	<b>583</b>	<b>513</b>							
519.lbm_r	128	1965	68.7	<b>1965</b>	<b>68.7</b>	1967	68.6							
521.wrf_r	128	<b>1157</b>	<b>248</b>	1157	248	1157	248							
526.blender_r	128	<b>474</b>	<b>411</b>	474	411	474	411							
527.cam4_r	128	931	241	937	239	<b>935</b>	<b>239</b>							
538.imagick_r	128	664	479	<b>665</b>	<b>479</b>	665	479							
544.nab_r	128	773	279	<b>785</b>	<b>275</b>	800	269							
549.fotonik3d_r	128	2779	179	2742	182	<b>2743</b>	<b>182</b>							
554.roms_r	128	1632	125	1636	124	<b>1633</b>	<b>125</b>							

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/usr/local/gcc-9.1.0/lib64:/usr/local/gcc-9.1.0/lib:/lib64:"
```

## General Notes

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

Custom Refresh Rate Set to 64ms

CPU Prefetcher Set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on localhost.localdomain Sun Jun 21 10:32:39 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

\*

\* Did not identify cpu model. If you would  
\* like to write your own sysinfo program, see  
\* www.spec.org/cpu2017/config.html#sysinfo

\*

\*

\* 0 "physical id" tags found. Perhaps this is an older system,  
\* or a virtualized system. Not attempting to guess how to  
\* count chips/cores for this system.

\*

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

From lscpu:

Architecture:	aarch64
CPU op-mode(s):	64-bit
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Thread(s) per core:	1
Core(s) per socket:	64
Socket(s):	2
NUMA node(s):	4

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Date:** May-2020

**Test Sponsor:** Peng Cheng Laboratory

**Hardware Availability:** Jun-2019

**Tested by:** Peng Cheng Laboratory

**Software Availability:** Jul-2020

## Platform Notes (Continued)

Vendor ID:	HiSilicon
Model:	0
Model name:	Kunpeng-920
Stepping:	0x1
BogoMIPS:	200.00
L1d cache:	8 MiB
L1i cache:	8 MiB
L2 cache:	64 MiB
L3 cache:	256 MiB
NUMA node0 CPU(s):	0-31
NUMA node1 CPU(s):	32-63
NUMA node2 CPU(s):	64-95
NUMA node3 CPU(s):	96-127
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; __user pointer sanitization
Vulnerability Spectre v2:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fp asimd evtstrm aes pmull shal sha2 crc32 atomics fphp asimdhdp cpuid asimdrdm jscvt fcma dcpop asimddp asimdfhm ssbs

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

From /proc/meminfo

MemTotal:	535431808 kB
HugePages_Total:	100000
Hugepagesize:	2048 kB

From /etc/\*release\* /etc/\*version\*

kylin-release:	kylin release 10 (Azalea)
os-release:	
NAME="kylin"	
VERSION="10 (Azalea)"	
ID="kylin"	
VERSION_ID="10"	
PRETTY_NAME="kylin 10 (Azalea)"	
ANSI_COLOR="0;31"	

system-release: kylin release 10 (Azalea)

system-release-cpe: cpe:/o:kylin:kylin:10:ga:server

uname -a:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Platform Notes (Continued)

Linux localhost.localdomain 4.19.90-5.ky10.aarch64 #1 SMP Wed Apr 8 09:34:13 CST 2020  
aarch64 aarch64 aarch64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Not affected
tsx_async_abort:	Not affected

run-level 5 Jun 19 18:22

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/klas00-home	xfs	1.5T	33G	1.4T	3%	/home

From /sys/devices/virtual/dmi/id

BIOS:	Huawei Corp.	1.16	02/28/2020
Vendor:	Huawei		
Product:	Taishan 200	(Model 2280)	
Serial:	2102312PRNN0KC001136		

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM
16x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

The sysinfo is missing the cpu name, the processor under test is Huawei Kunpeng 920 7260. The L3 capacity is 64MB per processor for Huawei Kunpeng 920 7260 processor for a SUT total of 128 MiB.

## Compiler Version Notes

=====

C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

-----  
Using built-in specs.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Compiler Version Notes (Continued)

```
COLLECT_GCC=/usr/local/gcc-9.1.0/bin/gcc
COLLECT_LTO_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper
Target: aarch64-unknown-linux-gnu
Configured with: ../configure --enable-checking=release
  --enable-languages=c,c++,fortran --disable-multilib
  --prefix=/usr/local/gcc-9.1.0
Thread model: posix
gcc version 9.1.0 (GCC)
-----
=====
C++           | 508.namd_r(base) 510.parest_r(base)
-----
Using built-in specs.
COLLECT_GCC=/usr/local/gcc-9.1.0/bin/g++
COLLECT_LTO_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper
Target: aarch64-unknown-linux-gnu
Configured with: ../configure --enable-checking=release
  --enable-languages=c,c++,fortran --disable-multilib
  --prefix=/usr/local/gcc-9.1.0
Thread model: posix
gcc version 9.1.0 (GCC)
-----
=====
C++, C        | 511.povray_r(base) 526.blender_r(base)
-----
Using built-in specs.
COLLECT_GCC=/usr/local/gcc-9.1.0/bin/g++
COLLECT_LTO_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper
Target: aarch64-unknown-linux-gnu
Configured with: ../configure --enable-checking=release
  --enable-languages=c,c++,fortran --disable-multilib
  --prefix=/usr/local/gcc-9.1.0
Thread model: posix
gcc version 9.1.0 (GCC)
Using built-in specs.
COLLECT_GCC=/usr/local/gcc-9.1.0/bin/gcc
COLLECT_LTO_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper
Target: aarch64-unknown-linux-gnu
Configured with: ../configure --enable-checking=release
  --enable-languages=c,c++,fortran --disable-multilib
  --prefix=/usr/local/gcc-9.1.0
Thread model: posix
gcc version 9.1.0 (GCC)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Compiler Version Notes (Continued)

=====

C++, C, Fortran | 507.cactuBSSN\_r(base)

=====

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/g++

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ../configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/gcc

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ../configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/gfortran

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ../configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

=====

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/gfortran

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ../configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/gfortran

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ./configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

Using built-in specs.

COLLECT\_GCC=/usr/local/gcc-9.1.0/bin/gcc

COLLECT\_LTO\_WRAPPER=/usr/local/gcc-9.1.0/libexec/gcc/aarch64-unknown-linux-gnu/9.1.0/lto-wrapper

Target: aarch64-unknown-linux-gnu

Configured with: ./configure --enable-checking=release

--enable-languages=c,c++,fortran --disable-multilib

--prefix=/usr/local/gcc-9.1.0

Thread model: posix

gcc version 9.1.0 (GCC)

## Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using both C and C++:

g++ gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactubSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LINUX -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-mabi=lp64 -std=c99 -O3 -g -pipe -flto -march=armv8.2-a+lse  
-fno-PIE -fomit-frame-pointer -no-pie -funroll-loops
```

C++ benchmarks:

```
-mabi=lp64 -O3 -g -pipe -flto -march=armv8.2-a+lse -fno-PIE  
-fomit-frame-pointer -no-pie -funroll-loops
```

Fortran benchmarks:

```
-mabi=lp64 -O3 -g -pipe -flto -march=armv8.2-a+lse -fno-PIE  
-fomit-frame-pointer -no-pie -funroll-loops
```

Benchmarks using both Fortran and C:

```
-mabi=lp64 -std=c99 -O3 -g -pipe -flto -march=armv8.2-a+lse  
-fno-PIE -fomit-frame-pointer -no-pie -funroll-loops
```

Benchmarks using both C and C++:

```
-mabi=lp64 -std=c99 -O3 -g -pipe -flto -march=armv8.2-a+lse  
-fno-PIE -fomit-frame-pointer -no-pie -funroll-loops
```

Benchmarks using Fortran, C, and C++:

```
-mabi=lp64 -std=c99 -O3 -g -pipe -flto -march=armv8.2-a+lse  
-fno-PIE -fomit-frame-pointer -no-pie -funroll-loops
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2020-06-30.html>

<http://www.spec.org/cpu2017/flags/PCL-Platform-Settings-Kunpeng-V1.0-revF.html>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Huawei**

(Test Sponsor: Peng Cheng Laboratory)

Huawei TaiShan 200 Server (Model 2280)  
(2.6 GHz, Huawei Kunpeng 920 7260)

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 5036

**Test Sponsor:** Peng Cheng Laboratory

**Tested by:** Peng Cheng Laboratory

**Test Date:** May-2020

**Hardware Availability:** Jun-2019

**Software Availability:** Jul-2020

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2020-06-30.xml>

<http://www.spec.org/cpu2017/flags/PCL-Platform-Settings-Kunpeng-V1.0-revF.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-20 22:32:38-0400.

Report generated on 2020-07-07 14:29:55 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-07.