SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Platinum 8160)

SPECrate®2017_fp_base = 210

SPECrate®2017_fp_peak = 221

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020
Hardware Availability: Mar-2019
Software Availability: May-2019

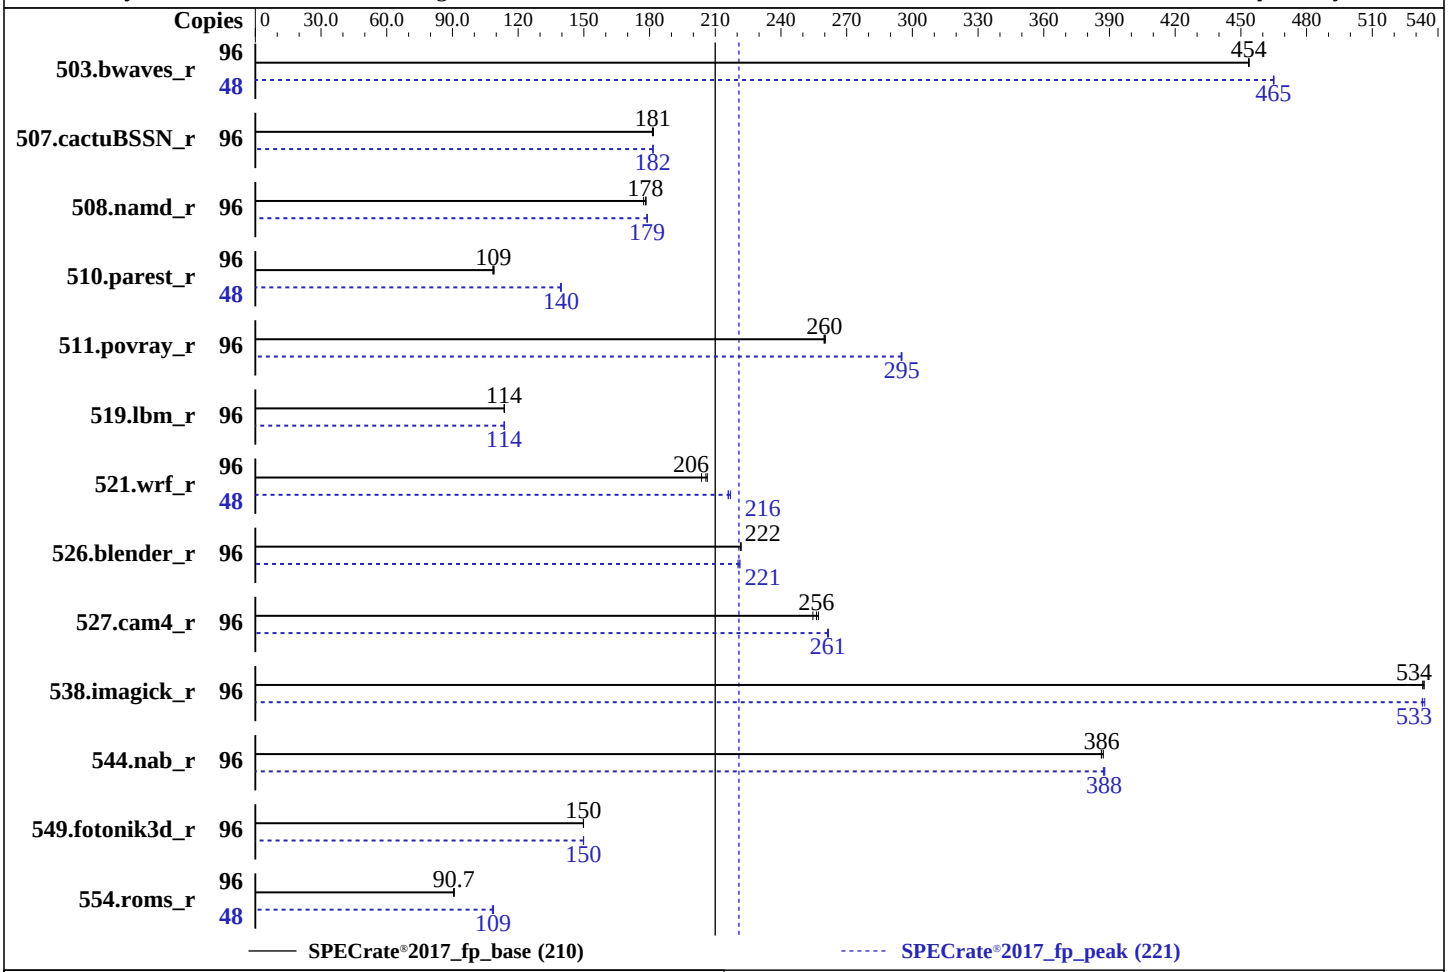

Hardware

CPU Name:	Intel Xeon Platinum 8160
Max MHz:	3700
Nominal:	2100
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	33 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933V-R, running at 2666)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 2.00.41 released Jun-2020 BIOS
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Platinum 8160)

SPECrate®2017_fp_base = 210

SPECrate®2017_fp_peak = 221

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Jun-2020
Hardware Availability: Mar-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	2123	454	**2122**	**454**	2121	454	48	1036	465	**1035**	**465**	1035	465
507.cactuBSSN_r	96	**670**	**181**	670	181	669	182	96	669	182	670	182	**669**	**182**
508.namd_r	96	511	178	**512**	**178**	514	177	96	510	179	**510**	**179**	509	179
510.parest_r	96	2315	108	2304	109	**2308**	**109**	48	901	139	**900**	**140**	899	140
511.povray_r	96	863	260	861	260	**863**	**260**	96	760	295	759	295	**760**	**295**
519.lbm_r	96	**890**	**114**	890	114	890	114	96	890	114	**890**	**114**	890	114
521.wrf_r	96	**1045**	**206**	1042	206	1055	204	48	498	216	496	217	**498**	**216**
526.blender_r	96	660	222	**660**	**222**	659	222	96	661	221	**662**	**221**	663	220
527.cam4_r	96	**655**	**256**	653	257	660	255	96	642	262	643	261	**642**	**261**
538.imagick_r	96	**447**	**534**	447	534	448	533	96	447	534	448	533	**448**	**533**
544.nab_r	96	418	386	417	387	**418**	**386**	96	**417**	**388**	417	388	417	387
549.fotonik3d_r	96	2496	150	**2497**	**150**	2497	150	96	2496	150	**2496**	**150**	2498	150
554.roms_r	96	1680	90.8	**1682**	**90.7**	1685	90.5	48	701	109	705	108	**702**	**109**

SPECrate®2017_fp_base = 210

SPECrate®2017_fp_peak = 221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
 Set SNC to Enabled
 Set IMC Interleaving to 1-way Interleave
 Set XPT Prefetcher to Enabled
 Set Patrol Scrub to Disabled
 Set Autonomous Core C-State to Enabled

 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on linux-wax3 Wed Jun 24 21:46:18 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
       2  "physical id"s (chips)
       96 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                96
      On-line CPU(s) list:   0-95
      Thread(s) per core:    2
      Core(s) per socket:    24
      Socket(s):             2
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
      Stepping:              4
      CPU MHz:               2100.000
      CPU max MHz:           3700.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              4200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              33792K
      NUMA node0 CPU(s):     0-2,6-8,12-14,18-20,48-50,54-56,60-62,66-68
      NUMA node1 CPU(s):     3-5,9-11,15-17,21-23,51-53,57-59,63-65,69-71
      NUMA node2 CPU(s):     24-26,30-32,36-38,42-44,72-74,78-80,84-86,90-92
      NUMA node3 CPU(s):     27-29,33-35,39-41,45-47,75-77,81-83,87-89,93-95
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single pti intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority
      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_l1d

  /proc/cpuinfo cache data
     cache size : 33792 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 48 49 50 54 55 56 60 61 62 66 67 68
    node 0 size: 95257 MB
    node 0 free: 80884 MB
    node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 51 52 53 57 58 59 63 64 65 69 70 71
    node 1 size: 96753 MB
    node 1 free: 86567 MB
    node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 72 73 74 78 79 80 84 85 86 90 91 92
    node 2 size: 96753 MB
    node 2 free: 87186 MB
    node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 75 76 77 81 82 83 87 88 89 93 94 95
```

(Continued on next page)

Platform Notes (Continued)

```
   node 3 size: 96519 MB
   node 3 free: 87016 MB
   node distances:
   node   0   1   2   3
     0:  10  11  21  21
     1:  11  10  21  21
     2:  21  21  10  11
     3:  21  21  11  10

 From /proc/meminfo
    MemTotal:       394530568 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP4

 From /etc/*release* /etc/*version*
    SuSE-release:
       SUSE Linux Enterprise Server 12 (x86_64)
       VERSION = 12
       PATCHLEVEL = 4
       # This file is deprecated and will be removed in a future service pack or release.
       # Please check /etc/os-release for details about this release.
    os-release:
       NAME="SLES"
       VERSION="12-SP4"
       VERSION_ID="12.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
       ID="sles"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:12:sp4"

 uname -a:
    Linux linux-wax3 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        Mitigation: PTE Inversion; VMX: conditional
                                           cache flushes, SMT vulnerable
 Microarchitectural Data Sampling:         No status reported
 CVE-2017-5754 (Meltdown):                 Mitigation: PTI
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
```

(Continued on next page)

Platform Notes (Continued)

```
                                      Speculation, IBPB, IBRS_FW

 run-level 3 Jun 24 11:10

 SPEC is set to: /home/speccpu
    Filesystem     Type   Size  Used Avail Use% Mounted on
    /dev/md126p1   btrfs  401G   50G  350G  13% /home

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 2.00.41 06/09/2020
     Vendor:  New H3C Technologies Co., Ltd.
     Product: UniServer R4900 G3
     Product Family: Rack
     Serial:  210231A6T3H19B000065

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     12x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2666
     12x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

Peak Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevE.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-24 09:46:17-0400.
Report generated on 2020-07-21 13:17:52 by CPU2017 PS formatter v6255.
Originally published on 2020-07-21.