# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029P-WTRT
(X11DDW-NT, Intel Xeon Silver 4210R)

SPECrate®2017_int_base = 127

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Aug-2020
**Hardware Availability:** Feb-2020
**Software Availability:** Apr-2020

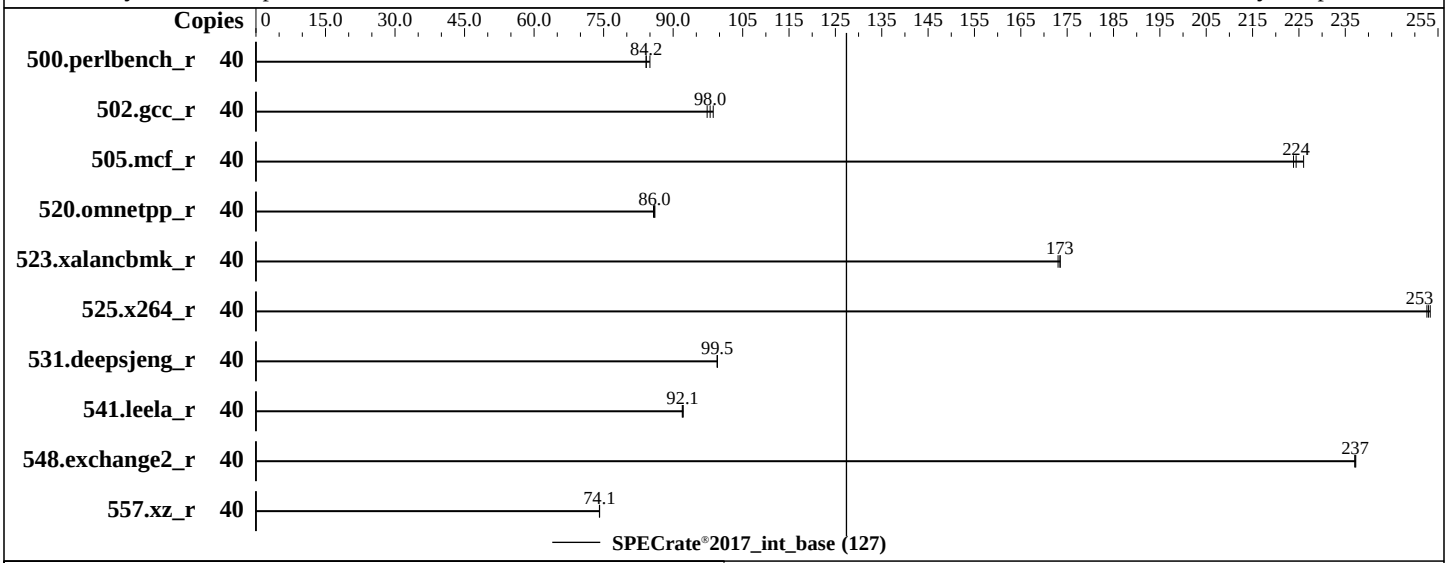


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Silver 4210R |
| Max MHz: | 3200 |
| Nominal: | 2400 |
| Enabled: | 20 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 13.75 MB I+D on chip per chip |
| Other: | None |
| Memory: | 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400) |
| Storage: | 1 x 240 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64 |
| Compiler: | C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux |
| Parallel: | No |
| Firmware: | Version 3.3 released Feb-2020 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1029P-WTRT
(X11DDW-NT, Intel Xeon Silver 4210R)

SPECrate®2017_int_base = 127

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Aug-2020
**Hardware Availability:** Feb-2020
**Software Availability:** Apr-2020

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 40 | 749 | 85.0 | 757 | 84.2 | **756** | **84.2** | | | | | | | |
| 502.gcc_r | 40 | 582 | 97.3 | 574 | 98.6 | **578** | **98.0** | | | | | | | |
| 505.mcf_r | 40 | **288** | **224** | 289 | 224 | 286 | 226 | | | | | | | |
| 520.omnetpp_r | 40 | 612 | 85.8 | 610 | 86.0 | **610** | **86.0** | | | | | | | |
| 523.xalancbmk_r | 40 | **244** | **173** | 243 | 173 | 244 | 173 | | | | | | | |
| 525.x264_r | 40 | 276 | 253 | **277** | **253** | 277 | 253 | | | | | | | |
| 531.deepsjeng_r | 40 | **461** | **99.5** | 461 | 99.5 | 460 | 99.5 | | | | | | | |
| 541.leela_r | 40 | 720 | 92.0 | **720** | **92.1** | 719 | 92.2 | | | | | | | |
| 548.exchange2_r | 40 | 442 | 237 | **442** | **237** | 442 | 237 | | | | | | | |
| 557.xz_r | 40 | 583 | 74.1 | **583** | **74.1** | 583 | 74.1 | | | | | | | |

**SPECrate®2017_int_base = 127**

**SPECrate®2017_int_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
     32"
MALLOC_CONF = "retain:true"
```

## General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Mon Aug 17 14:47:45 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
       2  "physical id"s (chips)
       40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 10
       siblings  : 20
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              40
      On-line CPU(s) list: 0-39
      Thread(s) per core:  2
      Core(s) per socket:  10
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Socket(s):             2
      NUMA node(s):          2
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
      Stepping:              7
      CPU MHz:               1000.076
      BogoMIPS:              4800.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              14080K
      NUMA node0 CPU(s):     0-9,20-29
      NUMA node1 CPU(s):     10-19,30-39
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp_epp pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 14080 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
    node 0 size: 191857 MB
    node 0 free: 191106 MB
    node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
    node 1 size: 193503 MB
    node 1 free: 193092 MB
    node distances:
    node   0   1
      0:  10  21
      1:  21  10

  From /proc/meminfo
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    MemTotal:       394609496 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

  uname -a:
    Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  itlb_multihit:                          KVM: Mitigation: Split huge pages
  CVE-2018-3620 (L1 Terminal Fault):      Not affected
  Microarchitectural Data Sampling:       Not affected
  CVE-2017-5754 (Meltdown):               Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
  CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
                                          RSB filling
  tsx_async_abort:                        Mitigation: Clear CPU buffers; SMT vulnerable

  run-level 3 Aug 17 14:39

  SPEC is set to: /home/cpu2017
    Filesystem           Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   168G   16G  153G  10% /home

  From /sys/devices/virtual/dmi/id
      BIOS:    American Megatrends Inc. 3.3 02/21/2020
      Vendor:  Supermicro
      Product: Super Server
      Serial:  0123456789
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     12x SK Hynix HMA84GR7JJR4N-WM 32 GB 2 rank 2933

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

## Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revB.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revB.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-17 17:47:44-0400.
Report generated on 2020-09-01 19:15:15 by CPU2017 PS formatter v6255.
Originally published on 2020-09-01.