



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

**SPECspeed®2017\_fp\_base = 225**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 9017


**Test Date:** Aug-2020

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jan-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2020

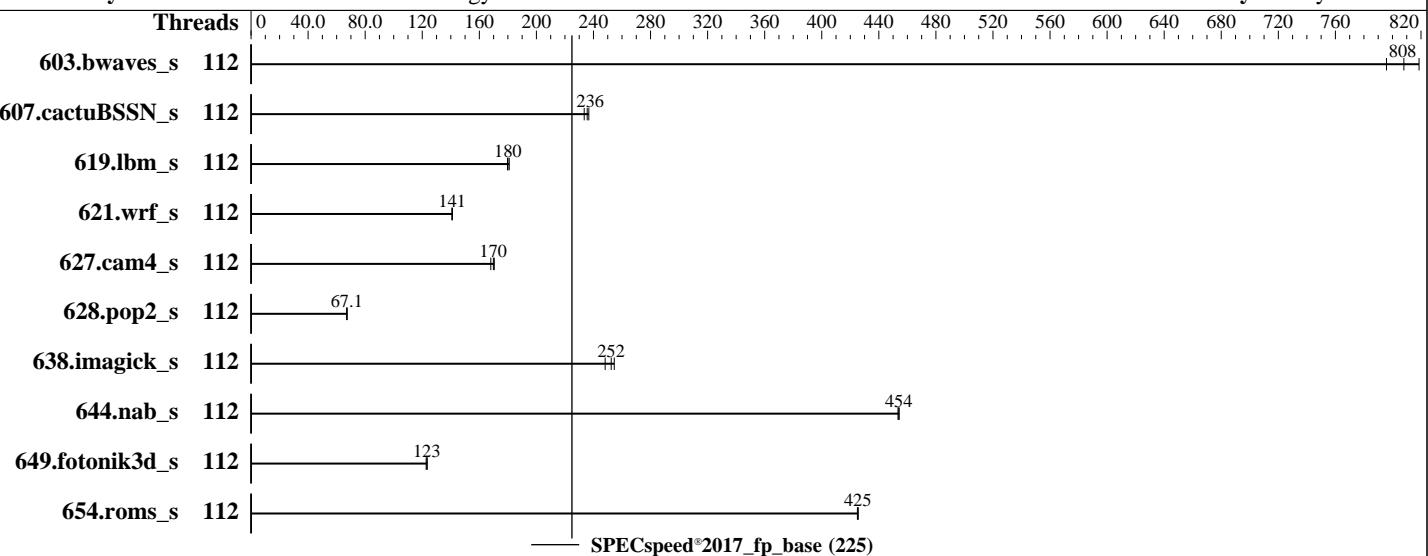

### Hardware

CPU Name: Intel Xeon Platinum 8276L  
Max MHz: 4000  
Nominal: 2200  
Enabled: 112 cores, 4 chips  
Orderable: 4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
Compiler: Kernel 4.12.14-195-default  
C/C++: Version 19.0.5.281 of Intel  
C/C++: Compiler for Linux;  
Fortran: Version 19.0.5.281 of  
Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Lenovo BIOS Version TEE156L 2.61 released May-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	112	72.1	819	74.1	796	<b>73.0</b>	<b>808</b>							
607.cactuBSSN_s	112	70.4	237	<b>70.8</b>	<b>236</b>		71.4	233						
619.lbm_s	112	<b>29.1</b>	<b>180</b>	29.1	180		28.9	181						
621.wrf_s	112	<b>93.8</b>	<b>141</b>	93.9	141		93.8	141						
627.cam4_s	112	<b>52.2</b>	<b>170</b>	52.0	170		52.7	168						
628.pop2_s	112	177	67.1	<b>177</b>	<b>67.1</b>		176	67.4						
638.imagick_s	112	<b>57.1</b>	<b>252</b>	58.1	248		56.7	255						
644.nab_s	112	<b>38.5</b>	<b>454</b>	38.5	454		38.5	453						
649.fotonik3d_s	112	74.3	123	<b>74.0</b>	<b>123</b>		73.8	123						
654.roms_s	112	37.0	426	37.0	425	<b>37.0</b>	<b>425</b>							
SPECspeed®2017_fp_base = 225														
SPECspeed®2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.0-ic19.0u5-2/lib/intel64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

MONITOR/MWAIT set to Enable

Hyper-Threading set to Disable

```
Sysinfo program /home/cpu2017-1.1.0-ic19.0u5-2/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-qjkl Fri Aug 21 10:12:47 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 28
    siblings   : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        46 bits physical, 48 bits virtual
CPU(s):               112
On-line CPU(s) list: 0-111
Thread(s) per core:  1
Core(s) per socket:  28
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
Stepping:              6
CPU MHz:              2200.000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

**SPECspeed®2017\_fp\_base = 225**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2020

**Hardware Availability:** Jan-2020

**Software Availability:** May-2020

## Platform Notes (Continued)

CPU max MHz: 4000.0000

CPU min MHz: 1000.0000

BogoMIPS: 4400.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 39424K

NUMA node0 CPU(s): 0-27

NUMA node1 CPU(s): 28-55

NUMA node2 CPU(s): 56-83

NUMA node3 CPU(s): 84-111

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf fm perf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsavveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 386681 MB
node 0 free: 385752 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 387066 MB
node 1 free: 386804 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 387066 MB
node 2 free: 386833 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 387035 MB
node 3 free: 386781 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

## Platform Notes (Continued)

```
node   0   1   2   3
 0: 10  21  21  21
 1: 21  10  21  21
 2: 21  21  10  21
 3: 21  21  21  10
```

```
From /proc/meminfo
  MemTotal:      1584998300 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-qjkl 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 21 10:10

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u5-2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   892G   70G  823G   8%  /
```

```
From /sys/devices/virtual/dmi/id
BIOS:    Lenovo -[TEE156L-2.61]- 05/20/2020
Vendor:  Lenovo
Product: ThinkSystem SR850P -[7D2HCTO1WW]-
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

## Platform Notes (Continued)

Product Family: ThinkSystem

Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactubssn\_s(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: May-2020

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECspeed®2017\_fp\_base = 225

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2020

Hardware Availability: Jan-2020

Software Availability: May-2020

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-m64 -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.html](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64\\_revD.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-I.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-08-20 22:12:47-0400.

Report generated on 2020-09-15 14:35:43 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-15.