SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Gold 6230)

SPECrate®2017_fp_base = 403

SPECrate®2017_fp_peak = 424

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020
Hardware Availability: Mar-2019
Software Availability: May-2019

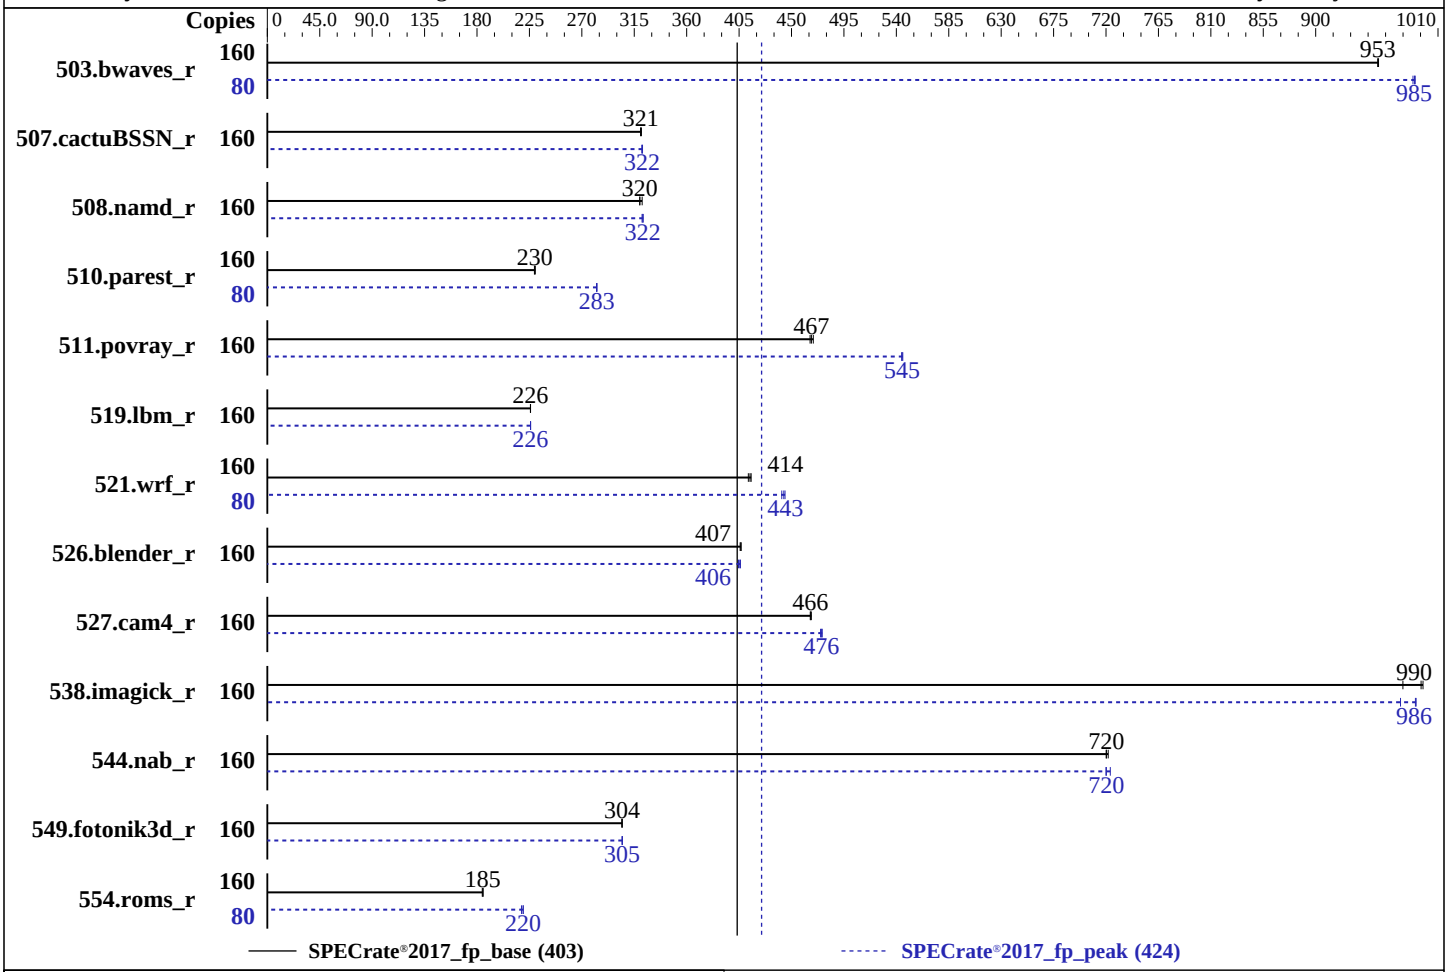

Hardware

CPU Name:	Intel Xeon Gold 6230
Max MHz:	3900
Nominal:	2100
Enabled:	80 cores, 4 chips, 2 threads/core
Orderable:	1,2,3,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933V-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux Server release 7.6 (Maipo) 3.10.0-957.el7.x86_64
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 2.00.33 released Aug-2019 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Gold 6230)

SPECrate®2017_fp_base = 403

SPECrate®2017_fp_peak = 424

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Sep-2020
Hardware Availability: Mar-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	**1683**	**953**	1683	953	1682	954	80	816	984	814	985	**815**	**985**
507.cactuBSSN_r	160	**632**	**321**	632	320	631	321	160	**630**	**322**	629	322	630	322
508.namd_r	160	475	320	472	322	**475**	**320**	160	472	322	**472**	**322**	471	323
510.parest_r	160	1825	229	**1823**	**230**	1820	230	80	**740**	**283**	740	283	740	283
511.povray_r	160	**800**	**467**	802	466	797	469	160	686	545	685	546	**686**	**545**
519.lbm_r	160	747	226	746	226	**747**	**226**	160	746	226	**746**	**226**	746	226
521.wrf_r	160	**865**	**414**	863	415	868	413	80	**404**	**443**	406	442	403	444
526.blender_r	160	**599**	**407**	599	407	600	406	160	600	406	**601**	**406**	602	404
527.cam4_r	160	**600**	**466**	599	467	600	466	160	589	475	**588**	**476**	587	476
538.imagick_r	160	**402**	**990**	408	975	401	992	160	403	986	409	973	**404**	**986**
544.nab_r	160	373	722	374	720	**374**	**720**	160	**374**	**720**	374	720	372	724
549.fotonik3d_r	160	2047	305	**2048**	**304**	2048	304	160	2046	305	2047	305	**2046**	**305**
554.roms_r	160	**1373**	**185**	1373	185	1378	185	80	579	220	583	218	**579**	**220**

SPECrate®2017_fp_base = 403

SPECrate®2017_fp_peak = 424

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS settings:
Set SNC to Enabled
Set IMC Interleaving to 1-way Interleave
Set Patrol Scrub to Disabled

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Thu Sep  3 06:43:35 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
      4  "physical id"s (chips)
      160 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 20
      siblings  : 40
      physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:
     Architecture:          x86_64
     CPU op-mode(s):        32-bit, 64-bit
     Byte Order:            Little Endian
     CPU(s):                160
     On-line CPU(s) list:   0-159
     Thread(s) per core:    2
     Core(s) per socket:    20
     Socket(s):             4
     NUMA node(s):          8
     Vendor ID:             GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6230 CPU @ 2.10GHz
      Stepping:              7
      CPU MHz:               2101.000
      CPU max MHz:           2101.0000
      CPU min MHz:           800.0000
      BogoMIPS:              4200.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              28160K
      NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
      NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
      NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
      NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
      NUMA node4 CPU(s):     40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
      NUMA node5 CPU(s):     43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
      NUMA node6 CPU(s):     60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
      NUMA node7 CPU(s):     63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
      aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_ppin
      intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
      xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
      pts pku ospke avx512_vnni spec_ctrl intel_stibp flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 28160 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
    node 0 size: 47767 MB
    node 0 free: 34048 MB
    node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
    node 1 size: 49152 MB
    node 1 free: 38306 MB
    node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
    node 2 size: 49152 MB
```


(Continued on next page)

Platform Notes (Continued)

```
   node 2 free: 38483 MB
   node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
   node 3 size: 49152 MB
   node 3 free: 38401 MB
   node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
   node 4 size: 49152 MB
   node 4 free: 38447 MB
   node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
   node 5 size: 49152 MB
   node 5 free: 37777 MB
   node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
   node 6 size: 49152 MB
   node 6 free: 38459 MB
   node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
   node 7 size: 49152 MB
   node 7 free: 38386 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  21  21  21  21  21  21
     1:  11  10  21  21  21  21  21  21
     2:  21  21  10  11  21  21  21  21
     3:  21  21  11  10  21  21  21  21
     4:  21  21  21  21  10  11  21  21
     5:  21  21  21  21  11  10  21  21
     6:  21  21  21  21  21  21  10  11
     7:  21  21  21  21  21  21  11  10

 From /proc/meminfo
    MemTotal:       394621364 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.6 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VARIANT="Server"
       VARIANT_ID="server"
       VERSION_ID="7.6"
       PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
    redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         No status reported
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                            via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):        Mitigation: Load fences, __user pointer
                                            sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS

  run-level 3 Sep 2 14:56

  SPEC is set to: /home/speccpu
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   839G   98G  742G  12% /home

  From /sys/devices/virtual/dmi/id
      BIOS:    American Megatrends Inc. 2.00.33 08/22/2019
      Vendor:  New H3C Technologies Co., Ltd.
      Product: H3C UniServer R6900 G3
      Serial:  210235A3T0H204000004

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      24x Micron 18ASF2G72PDZ-2G9E1 16 GB 2 rank 2933
      24x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc -m64 -std=c11`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:
`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:
`icpc -m64 icc -m64 -std=c11 ifort -m64`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:
```
icc -m64 -std=c11
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:
```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpc -m64 icc -m64 -std=c11 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

526.blender_r: `-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`

Benchmarks using Fortran, C, and C++:
`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs -align array32byte`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-02 18:43:35-0400.
Report generated on 2020-09-29 15:22:36 by CPU2017 PS formatter v6255.
Originally published on 2020-09-29.