SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge R540 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017_fp_base = 54.7

SPECspeed®2017_fp_peak = 55.4

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Sep-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

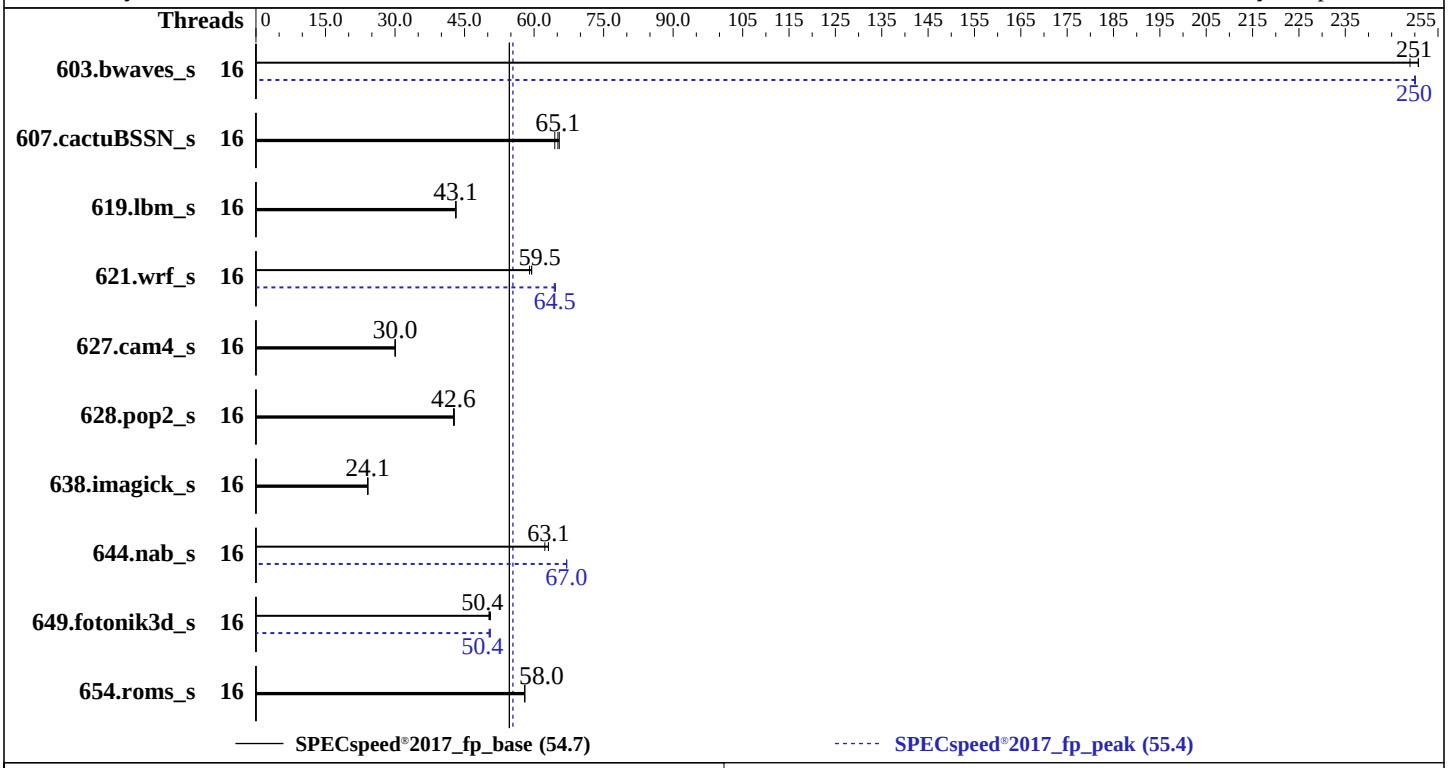

Hardware

CPU Name:	Intel Xeon Bronze 3206R
Max MHz:	1900
Nominal:	1900
Enabled:	16 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	11 MB I+D on chip per chip
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2133)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.2 kernel 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel:	Yes
Firmware:	Version 2.8.1 released Jun-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge R540 (Intel Xeon Bronze 3206R, 1.90 GHz)

SPECspeed®2017_fp_base = 54.7

SPECspeed®2017_fp_peak = 55.4

CPU2017 License: 55
Test Sponsor: Dell Inc
Tested by: Dell Inc.

Test Date: Sep-2020
Hardware Availability: Jul-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	235	251	237	249	**235**	**251**	16	236	250	236	250	**236**	**250**
607.cactuBSSN_s	16	255	65.4	259	64.5	**256**	**65.1**	16	255	65.4	259	64.5	**256**	**65.1**
619.lbm_s	16	122	43.1	121	43.2	**122**	**43.1**	16	122	43.1	121	43.2	**122**	**43.1**
621.wrf_s	16	**222**	**59.5**	222	59.5	224	59.0	16	205	64.6	**205**	**64.5**	206	64.3
627.cam4_s	16	295	30.0	295	30.1	**295**	**30.0**	16	295	30.0	295	30.1	**295**	**30.0**
628.pop2_s	16	278	42.6	277	42.8	**278**	**42.6**	16	278	42.6	277	42.8	**278**	**42.6**
638.imagick_s	16	599	24.1	**598**	**24.1**	597	24.2	16	599	24.1	**598**	**24.1**	597	24.2
644.nab_s	16	280	62.3	**277**	**63.1**	277	63.1	16	261	67.0	261	67.0	**261**	**67.0**
649.fotonik3d_s	16	180	50.6	**181**	**50.4**	181	50.3	16	181	50.3	180	50.6	**181**	**50.4**
654.roms_s	16	**272**	**58.0**	272	58.0	272	58.0	16	**272**	**58.0**	272	58.0	272	58.0

SPECspeed®2017_fp_base = 54.7

SPECspeed®2017_fp_peak = 55.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/home/cpu2017-ic19.1u1/lib/intel64:/home/cpu2017-ic19.1u1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
```

(Continued on next page)

General Notes (Continued)

```
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub set to standard
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
UPI Prefetch disabled
LLC Prefetch disabled
Dead Line LLC Alloc enabled
Directory AtoS disabled

Sysinfo program /home/cpu2017-ic19.1u1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on RHEL-8-2-SUT Thu Sep 10 20:55:29 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
      2  "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              16
     On-line CPU(s) list: 0-15
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:  1
      Core(s) per socket:  8
      Socket(s):           2
      NUMA node(s):        2
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
      Stepping:            7
      CPU MHz:             1841.918
      CPU max MHz:         1900.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            3800.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            11264K
      NUMA node0 CPU(s):   0,2,4,6,8,10,12,14
      NUMA node1 CPU(s):   1,3,5,7,9,11,13,15
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 11264 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 2 4 6 8 10 12 14
    node 0 size: 192048 MB
    node 0 free: 190374 MB
    node 1 cpus: 1 3 5 7 9 11 13 15
    node 1 size: 193533 MB
    node 1 free: 186917 MB
    node distances:
    node   0   1
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  21
     1:  21  10

  From /proc/meminfo
     MemTotal:       394835732 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.2 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.2"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
        ANSI_COLOR="0;31"
     redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
     system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

  uname -a:
     Linux RHEL-8-2-SUT 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  itlb_multihit:                           KVM: Vulnerable
  CVE-2018-3620 (L1 Terminal Fault):       Not affected
  Microarchitectural Data Sampling:        Not affected
  CVE-2017-5754 (Meltdown):                Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user
                                           pointer sanitization
  CVE-2017-5715 (Spectre variant 2):       Mitigation: Enhanced IBRS, IBPB: conditional,
                                           RSB filling
  tsx_async_abort:                         Mitigation: Clear CPU buffers; SMT disabled

  run-level 3 Sep 10 12:38 last=5

  SPEC is set to: /home/cpu2017-ic19.1u1
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   392G   13G  379G   4% /home

  From /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
      BIOS:    Dell Inc. 2.8.1 06/30/2020
      Vendor:  Dell Inc.
      Product: PowerEdge R540
      Product Family: PowerEdge

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      1x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
      6x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
      5x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
      4x Not Specified Not Specified

  (End of data from sysinfo program)
Memory running at 2133
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries`

Fortran benchmarks:
`-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using both Fortran and C:
`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-10 21:55:28-0400.
Report generated on 2020-10-14 09:22:24 by CPU2017 PS formatter v6255.
Originally published on 2020-10-13.