SPEC CPU®2017 Floating Point Rate Result

Intel Corporation
Intel S9248WK2HAC

SPECrate®2017_fp_base = 508

SPECrate®2017_fp_peak = 540

CPU2017 License:	13	**Test Date:**	Oct-2020
Test Sponsor:	Intel Corporation	**Hardware Availability:**	Jul-2019
Tested by:	Intel Corporation	**Software Availability:**	Sep-2020

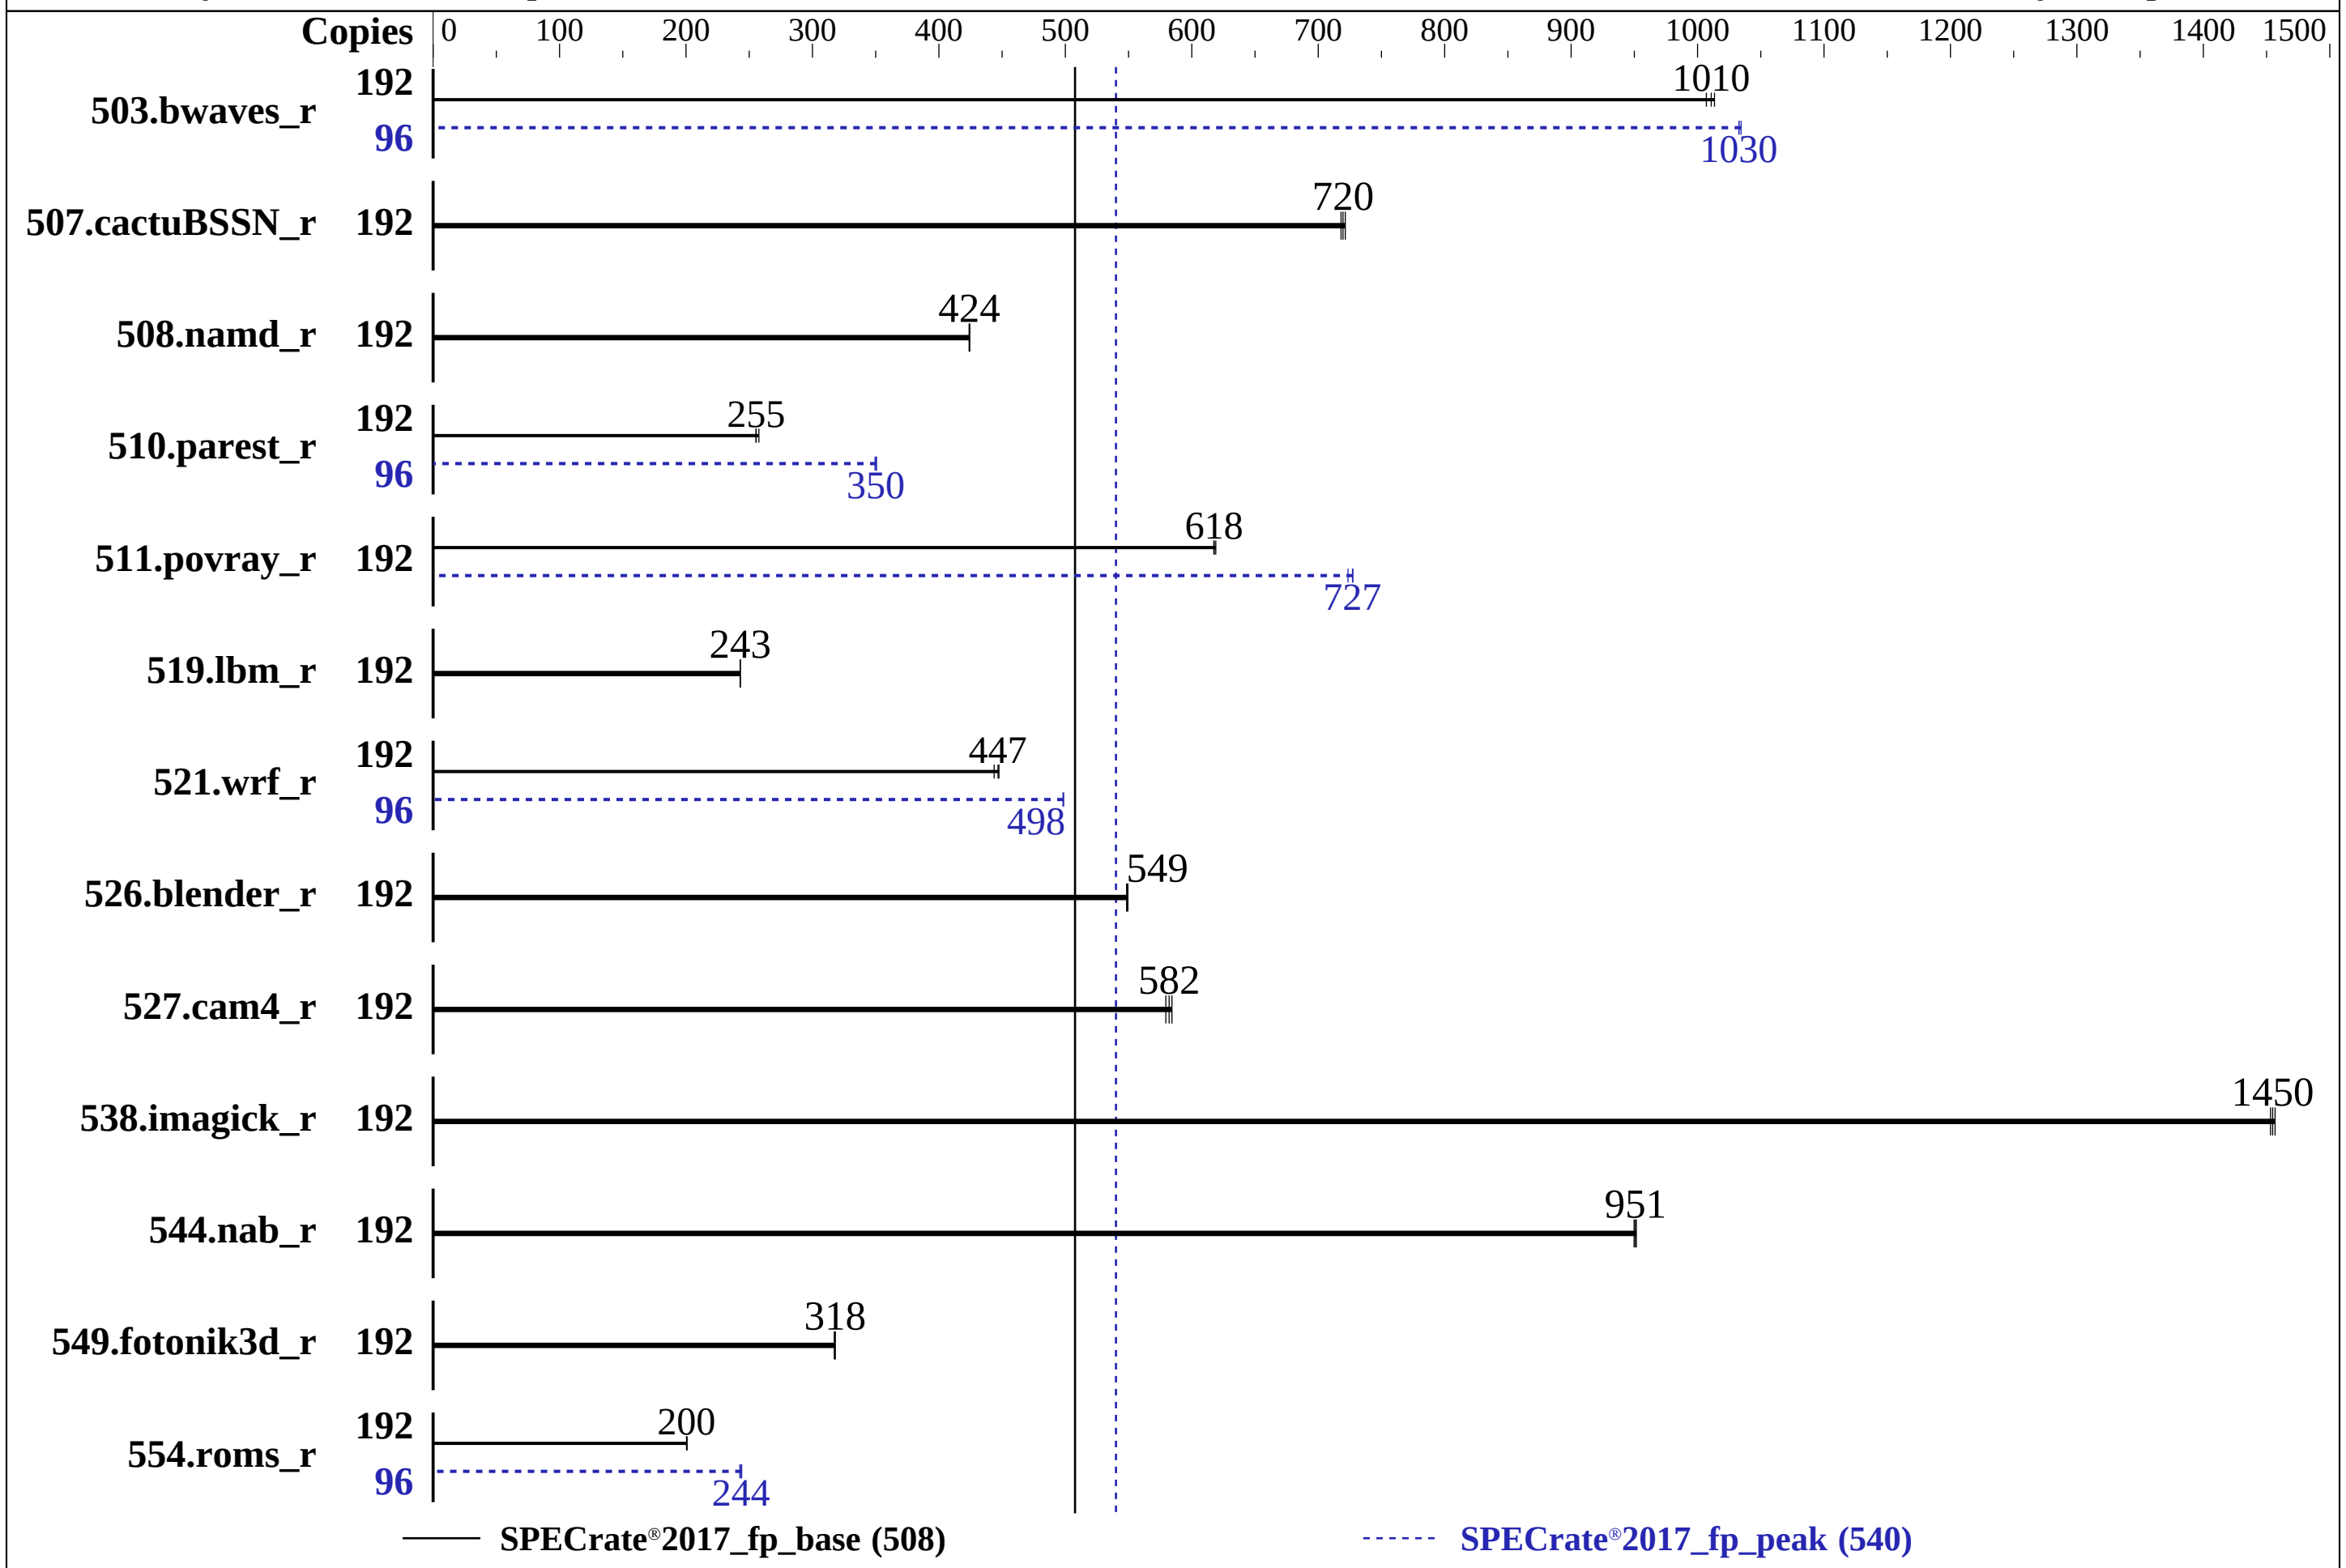

Hardware

CPU Name:	Intel Xeon Platinum 9242
Max MHz:	3800
Nominal:	2300
Enabled:	96 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	71.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	Intel P4510 NVMe SSD 1TB, U.2 PCIe
Other:	None

Software

OS:	CentOS Linux release 8.2.2004 (Core) 4.18.0-193.19.1.el8_2.x86_64
Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
Parallel:	No
Firmware:	Version SE5C620.86B.22.01.0092.121620190352 12/16/2019 Released May-2020
File System:	xfs
System State:	Run level 3 (Multi-User Mode with Networking)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	**1905**	**1010**	1900	1010	1912	1010	96	931	1030	**932**	**1030**	932	1030
507.cactuBSSN_r	192	339	718	**338**	**720**	337	721	192	339	718	**338**	**720**	337	721
508.namd_r	192	430	424	430	424	**430**	**424**	192	430	424	430	424	**430**	**424**
510.parest_r	192	1950	258	**1966**	**255**	1967	255	96	716	351	719	350	**717**	**350**
511.povray_r	192	724	619	726	617	**726**	**618**	192	**617**	**727**	620	724	616	727
519.lbm_r	192	**833**	**243**	833	243	833	243	192	**833**	**243**	833	243	833	243
521.wrf_r	192	969	444	961	448	**963**	**447**	96	431	499	432	498	**431**	**498**
526.blender_r	192	533	548	532	549	**533**	**549**	192	533	548	532	549	**533**	**549**
527.cam4_r	192	579	579	575	584	**577**	**582**	192	579	579	575	584	**577**	**582**
538.imagick_r	192	329	1450	328	1460	**328**	**1450**	192	329	1450	328	1460	**328**	**1450**
544.nab_r	192	340	950	**340**	**951**	340	952	192	340	950	**340**	**951**	340	952
549.fotonik3d_r	192	**2354**	**318**	2353	318	2358	317	192	**2354**	**318**	2353	318	2358	317
554.roms_r	192	**1522**	**200**	1522	200	1519	201	96	629	243	625	244	**626**	**244**

SPECrate®2017_fp_base = **508**

SPECrate®2017_fp_peak = **540**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
CPU Power and Performance Policy set to Performance
IMC Interleaving set to 1-way
Sub Numa Clustering set to Enabled
Virtualization Technology disabled

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on localhost.localdomain Mon Oct 12 04:10:24 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 9242 CPU @ 2.30GHz
       2  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 48
       siblings  : 96
       physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

 From lscpu:
```

(Continued on next page)

Platform Notes (Continued)

```
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              192
     On-line CPU(s) list: 0-191
     Thread(s) per core:  2
     Core(s) per socket:  48
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Platinum 9242 CPU @ 2.30GHz
     Stepping:            7
     CPU MHz:             3305.114
     CPU max MHz:         3800.0000
     CPU min MHz:         1000.0000
     BogoMIPS:            4600.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            36608K
     NUMA node0 CPU(s):   0-3,7,8,12-14,18-20,96-99,103,104,108-110,114-116
     NUMA node1 CPU(s):   4-6,9-11,15-17,21-23,100-102,105-107,111-113,117-119
     NUMA node2 CPU(s):   24-27,31-33,37-39,43,44,120-123,127-129,133-135,139,140
     NUMA node3 CPU(s):   28-30,34-36,40-42,45-47,124-126,130-132,136-138,141-143
     NUMA node4 CPU(s):   48-51,55-57,61-63,67,68,144-147,151-153,157-159,163,164
     NUMA node5 CPU(s):   52-54,58-60,64-66,69-71,148-150,154-156,160-162,165-167
     NUMA node6 CPU(s):   72-75,79-81,85-87,91,92,168-171,175-177,181-183,187,188
     NUMA node7 CPU(s):   76-78,82-84,88-90,93-95,172-174,178-180,184-186,189-191
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
     ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a
     avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
     xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
     dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
     md_clear flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 36608 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 96 97 98 99 103 104 108 109 110 114 115 116
  node 0 size: 95375 MB
  node 0 free: 95025 MB
  node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 100 101 102 105 106 107 111 112 113 117
  118 119
  node 1 size: 96762 MB
  node 1 free: 95897 MB
  node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 120 121 122 123 127 128 129 133 134
  135 139 140
  node 2 size: 96762 MB
  node 2 free: 96476 MB
  node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 124 125 126 130 131 132 136 137 138
  141 142 143
  node 3 size: 96762 MB
  node 3 free: 96607 MB
  node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68 144 145 146 147 151 152 153 157 158
  159 163 164
  node 4 size: 96762 MB
  node 4 free: 96606 MB
  node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71 148 149 150 154 155 156 160 161 162
  165 166 167
  node 5 size: 96762 MB
  node 5 free: 96587 MB
  node 6 cpus: 72 73 74 75 79 80 81 85 86 87 91 92 168 169 170 171 175 176 177 181 182
  183 187 188
  node 6 size: 96735 MB
  node 6 free: 96573 MB
  node 7 cpus: 76 77 78 82 83 84 88 89 90 93 94 95 172 173 174 178 179 180 184 185 186
  189 190 191
  node 7 size: 96759 MB
  node 7 free: 96605 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  21  21  21  21  21  21
    1:  11  10  21  21  21  21  21  21
    2:  21  21  10  11  21  21  21  21
    3:  21  21  11  10  21  21  21  21
    4:  21  21  21  21  10  11  21  21
    5:  21  21  21  21  11  10  21  21
    6:  21  21  21  21  21  21  10  11
    7:  21  21  21  21  21  21  11  10

From /proc/meminfo
   MemTotal:       791227824 kB
```

(Continued on next page)

Platform Notes (Continued)

```
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   centos-release: CentOS Linux release 8.2.2004 (Core)
   centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
   os-release:
      NAME="CentOS Linux"
      VERSION="8 (Core)"
      ID="centos"
      ID_LIKE="rhel fedora"
      VERSION_ID="8"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="CentOS Linux 8 (Core)"
      ANSI_COLOR="0;31"
   redhat-release: CentOS Linux release 8.2.2004 (Core)
   system-release: CentOS Linux release 8.2.2004 (Core)
   system-release-cpe: cpe:/o:centos:centos:8

uname -a:
   Linux localhost.localdomain 4.18.0-193.19.1.el8_2.x86_64 #1 SMP Mon Sep 14 14:37:00
   UTC 2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:                                   KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):               Not affected
Microarchitectural Data Sampling:                Not affected
CVE-2017-5754 (Meltdown):                        Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                 via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):              Mitigation: usercopy/swapgs barriers and __user
                                                 pointer sanitization
CVE-2017-5715 (Spectre variant 2):              Mitigation: Enhanced IBRS, IBPB: conditional,
                                                 RSB filling
srbds:                                           Not affected
tsx_async_abort:                                 Mitigation: TSX disabled

run-level 3 Oct 12 04:08

SPEC is set to: /root/cpu2017
   Filesystem                        Type  Size  Used Avail Use% Mounted on
   /dev/mapper/cl_clx--ap--sys-root xfs    50G   44G  6.7G  87% /

From /sys/devices/virtual/dmi/id
    BIOS:    Intel Corporation SE5C620.86B.22.01.0092.121620190352 12/16/2019
    Vendor:  Intel Corporation
```

(Continued on next page)

Platform Notes (Continued)

```
    Product: ............
    Product Family: Family
    Serial:  ............

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both C and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using both C and C++:
`icpc icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

508.namd_r: `basepeak = yes`

510.parest_r: `-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `Same as 503.bwaves_r`

Benchmarks using both Fortran and C:

521.wrf_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

507.cactuBSSN_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Intel-Platform-Settings-V1.2.xml

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-12 04:10:24-0400.
Report generated on 2020-10-27 16:16:24 by CPU2017 PS formatter v6255.
Originally published on 2020-10-27.