SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero QS400TU-224R4
(2.50 GHz,Intel Xeon Gold 6248)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Dec-2020

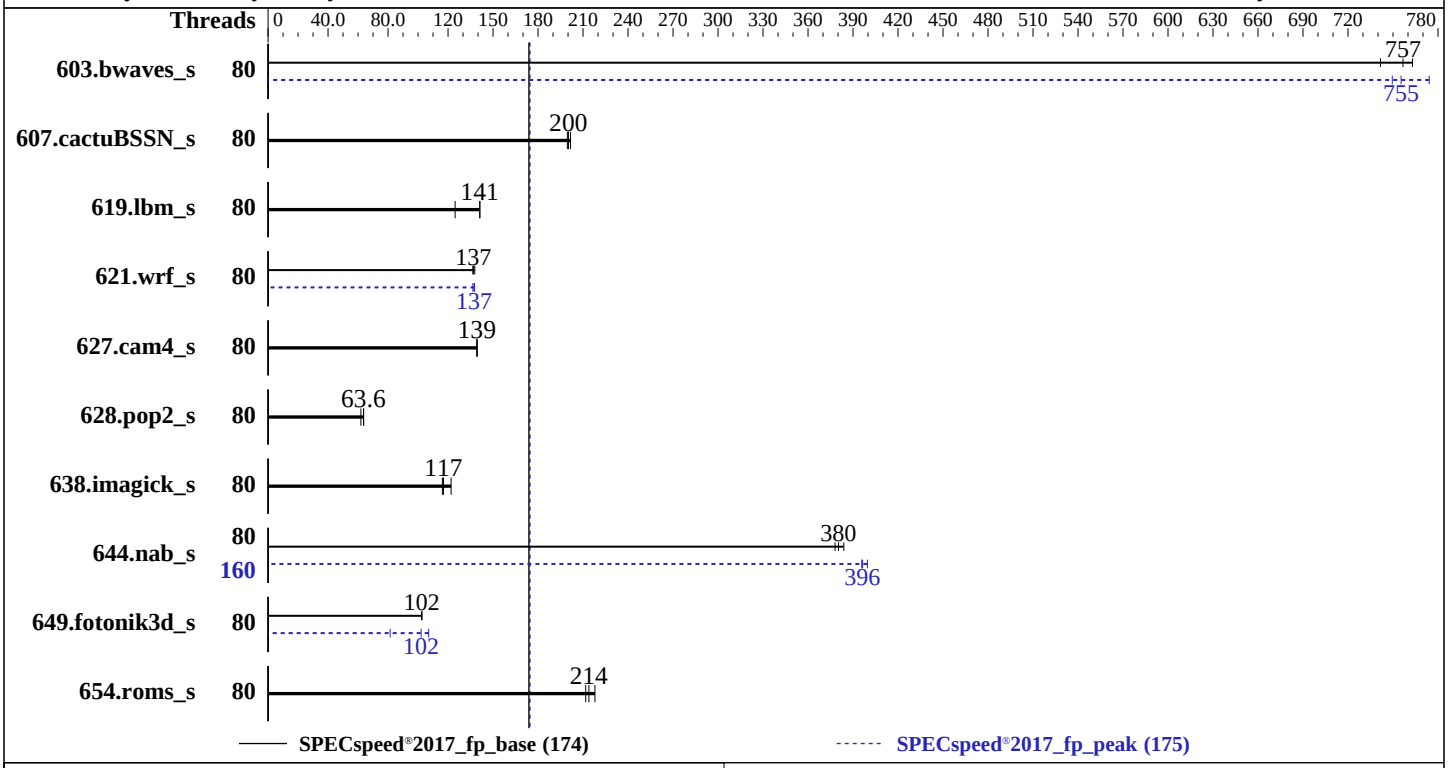

Hardware

CPU Name:	Intel Xeon Gold 6248
Max MHz:	3900
Nominal:	2500
Enabled:	80 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 (chip)s
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (24 x 16 GB 1Rx4 PC4-2933Y-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	CentOS Linux release 8.3.2011 Kernel 4.18.0-240.el8.x86_64 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 19.1.2.254 of Intel C/C++ Compiler for Linux Build 20200623; Fortran: Version 19.1.2.254 of Intel Fortran Compiler for Linux Build 20200623;
Parallel:	Yes
Firmware:	Version 3.4 released Nov-2020
File System:	xfs
System State:	Run level 3 (multi user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero QS400TU-224R4
(2.50 GHz,Intel Xeon Gold 6248)

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Feb-2021
Hardware Availability: Aug-2020
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	77.3	763	79.5	742	**78.0**	**757**	80	76.2	774	78.7	750	**78.1**	**755**
607.cactuBSSN_s	80	83.5	200	**83.2**	**200**	82.7	202	80	83.5	200	**83.2**	**200**	82.7	202
619.lbm_s	80	37.1	141	42.0	125	**37.1**	**141**	80	37.1	141	42.0	125	**37.1**	**141**
621.wrf_s	80	**96.5**	**137**	95.9	138	96.9	137	80	96.1	138	**96.3**	**137**	96.9	137
627.cam4_s	80	63.6	139	63.6	139	**63.6**	**139**	80	63.6	139	63.6	139	**63.6**	**139**
628.pop2_s	80	**187**	**63.6**	192	61.9	186	63.8	80	**187**	**63.6**	192	61.9	186	63.8
638.imagick_s	80	124	116	**123**	**117**	118	122	80	124	116	**123**	**117**	118	122
644.nab_s	80	46.2	378	**45.9**	**380**	45.5	384	160	44.1	396	43.7	400	**44.1**	**396**
649.fotonik3d_s	80	**89.0**	**102**	88.8	103	89.0	102	80	**89.3**	**102**	85.1	107	112	81.4
654.roms_s	80	**73.6**	**214**	72.2	218	74.3	212	80	**73.6**	**214**	72.2	218	74.3	212

SPECspeed®2017_fp_base = **174**

SPECspeed®2017_fp_peak = **175**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Cascade Lake 4214R CPU + 384 GB RAM
memory using Centos 8.2 x84_64
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the Centos 8.2 x86_64, and the system compiler gcc 4.8.5
```

(Continued on next page)

General Notes (Continued)

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC = Enable
Stale AtoS = Disable
IMC Interleaving = 1-way Interleave
Patrol Scrub = Disable

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on localhost.localdomain Sat Feb 27 04:01:04 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
       4  "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              160
      On-line CPU(s) list: 0-159
      Thread(s) per core:  2
      Core(s) per socket:  20
      Socket(s):           4
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
```

(Continued on next page)

Platform Notes (Continued)

```
      Model:                85
      Model name:           Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
      Stepping:             7
      CPU MHz:              3538.359
      CPU max MHz:          3900.0000
      CPU min MHz:          1000.0000
      BogoMIPS:             5000.00
      Virtualization:       VT-x
      L1d cache:            32K
      L1i cache:            32K
      L2 cache:             1024K
      L3 cache:             28160K
      NUMA node0 CPU(s):    0-19,80-99
      NUMA node1 CPU(s):    20-39,100-119
      NUMA node2 CPU(s):    40-59,120-139
      NUMA node3 CPU(s):    60-79,140-159
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
      invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
      avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear
      flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 28160 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
    88 89 90 91 92 93 94 95 96 97 98 99
    node 0 size: 89997 MB
    node 0 free: 70633 MB
    node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
    103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
    node 1 size: 91695 MB
    node 1 free: 74215 MB
    node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
    123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
    node 2 size: 92701 MB
    node 2 free: 70028 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
  143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
  node 3 size: 91950 MB
  node 3 free: 72150 MB
  node distances:
  node   0   1   2   3
    0:  10  21  21  21
    1:  21  10  21  21
    2:  21  21  10  21
    3:  21  21  21  10

From /proc/meminfo
   MemTotal:       394580636 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   centos-release: CentOS Linux release 8.3.2011
   centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
   os-release:
      NAME="CentOS Linux"
      VERSION="8"
      ID="centos"
      ID_LIKE="rhel fedora"
      VERSION_ID="8"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="CentOS Linux 8"
      ANSI_COLOR="0;31"
   redhat-release: CentOS Linux release 8.3.2011
   system-release: CentOS Linux release 8.3.2011
   system-release-cpe: cpe:/o:centos:centos:8

uname -a:
   Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Fri Sep 25 19:48:47 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):                   Not affected
Microarchitectural Data Sampling:                    Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5754 (Meltdown):                          Not affected
 CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                    Bypass disabled via prctl and
                                                    seccomp
 CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                    barriers and __user pointer
                                                    sanitization
 CVE-2017-5715 (Spectre variant 2):                 Mitigation: Enhanced IBRS, IBPB:
                                                    conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):           Mitigation: TSX disabled

 run-level 3 Feb 25 01:57

 SPEC is set to: /home/cpu2017
    Filesystem          Type  Size  Used Avail Use% Mounted on
    /dev/mapper/cl-home xfs   372G  106G  267G  29% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Tyrone Systems
     Product:        Tyrone Camarero DS400TU-224R4
     Product Family: SMC X11
     Serial:         123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x NO DIMM NO DIMM
     24x Samsung M393A2K40DB2-CVF 16 GB 1 rank 2933, configured at 2934

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      3.4
    BIOS Date:         11/04/2020
    BIOS Revision:     5.14

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.2.254 Build 20200623
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

Benchmarks using Fortran, C, and C++:
`icpc icc ifort`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc`

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

603.bwaves_s: `-m64 -Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2)
`-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512`
`-O3 -no-prec-div -qopt-prefetch -ffinite-math-only`
`-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs`
`-mbranches-within-32B-boundaries`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

649.fotonik3d_s: `Same as 603.bwaves_s`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -std=c11 -Wl,-z,muldefs -prof-gen`(pass 1)
`-prof-use`(pass 2) `-ipo -xCORE-AVX512 -O3 -no-prec-div`
`-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`
`-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP`
`-mbranches-within-32B-boundaries -nostandard-realloc-lhs`
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-27 04:01:04-0500.
Report generated on 2021-03-16 15:28:50 by CPU2017 PS formatter v6255.
Originally published on 2021-03-16.