SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.00 GHz, AMD EPYC 7713

SPECspeed®2017_fp_base =	188
SPECspeed®2017_fp_energy_base =	593
SPECspeed®2017_fp_peak =	191
SPECspeed®2017_fp_energy_peak =	601

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

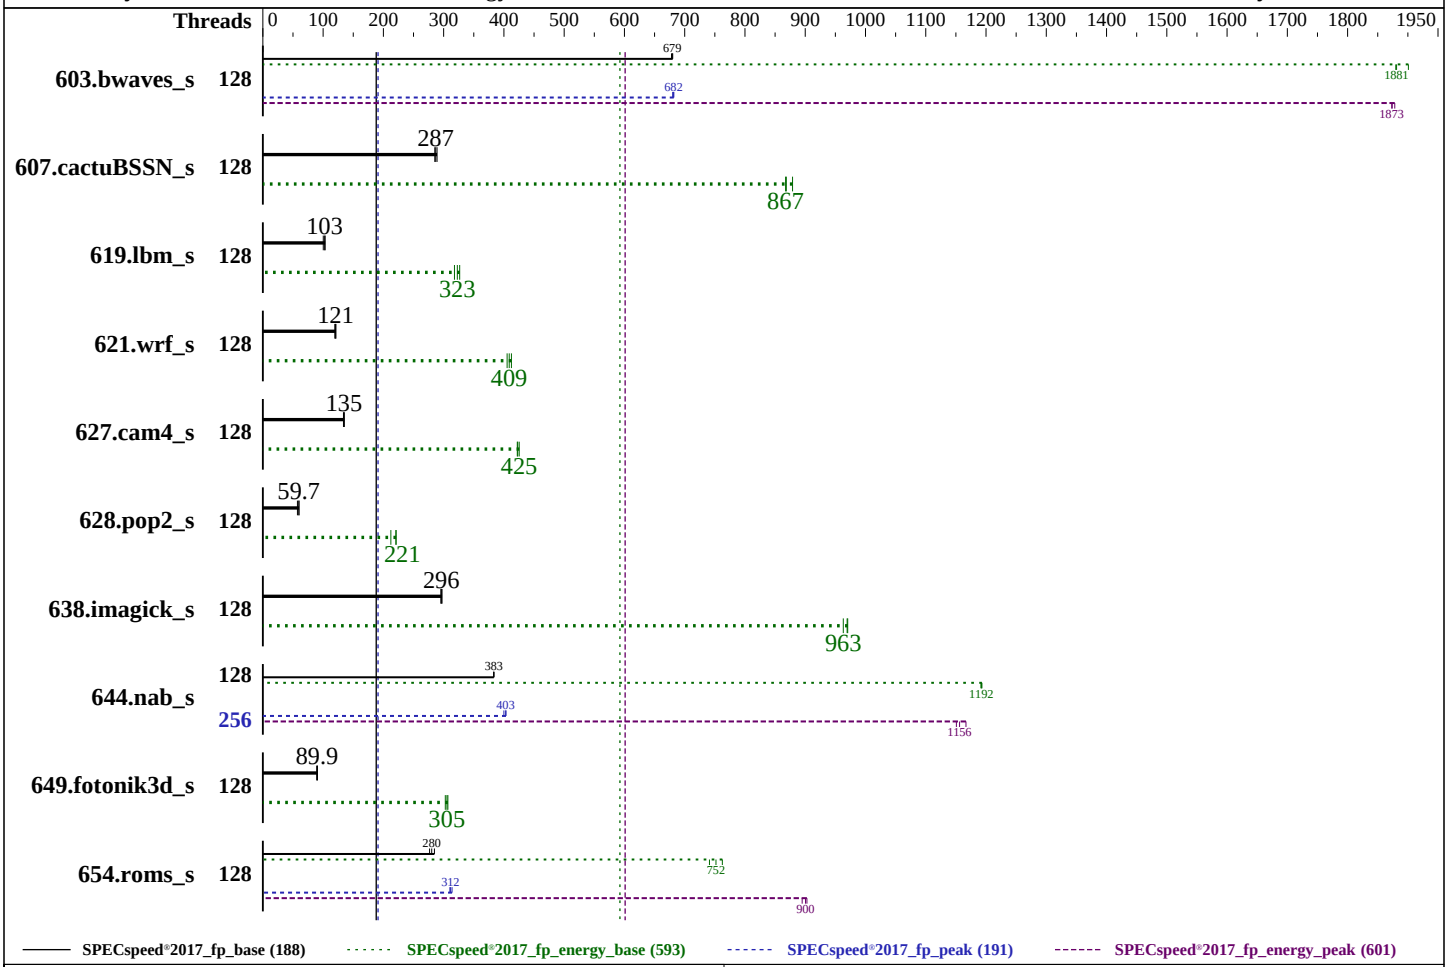

Hardware

CPU Name:	AMD EPYC 7713
Max MHz:	3675
Nominal:	2000
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 (x86_64) Kernel 5.3.18-22-default
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version D8E115B 2.00 released Feb-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to balance power and performance

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.00 GHz, AMD EPYC 7713

SPECspeed®2017_fp_base = 188
SPECspeed®2017_fp_energy_base = 593
SPECspeed®2017_fp_peak = 191
SPECspeed®2017_fp_energy_peak = 601

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Power

Max. Power (W): 436.53
Idle Power (W): 190.32
Min. Temperature (C): 23.31
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 3.00 of D8BT15H
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)
Details: ThinkSystem 750W Titanium Power Supply 4P57A26292
Backplane: 10 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A17089
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 8 x High Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UD17023E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GUANG ZHOU GRG METROLOGY & TEST CO.,LTD.
Calibration Label: J202009040176A-0001
Calibration Date: 25-Sep-2020
PTDaemon® Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: Connected to PSU1
Current Ranges Used: 2.5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	128	87.0	678	33.9	1900	389	402	**86.8**	**679**	**34.2**	**1880**	**394**	**407**	86.7	680	34.2	1880	395	407
607.cactuBSSN_s	128	57.7	289	20.7	879	360	376	58.4	285	21.0	869	359	376	**58.1**	**287**	**21.0**	**867**	**362**	**376**
619.lbm_s	128	52.2	100	18.7	318	358	407	**51.1**	**103**	**18.4**	**323**	**361**	**413**	50.7	103	18.2	327	359	418
621.wrf_s	128	109	121	35.0	412	321	327	**110**	**121**	**35.3**	**409**	**323**	**329**	111	119	35.6	405	322	327
627.cam4_s	128	**65.8**	**135**	**22.7**	**425**	**344**	**386**	66.3	134	22.8	422	345	390	65.6	135	22.8	423	347	390
628.pop2_s	128	**199**	**59.7**	**59.1**	**221**	**297**	**303**	207	57.4	61.4	212	297	303	198	60.0	59.0	221	298	304
638.imagick_s	128	48.5	297	16.2	970	334	427	48.8	295	16.2	970	332	421	**48.7**	**296**	**16.3**	**963**	**335**	**424**
644.nab_s	128	45.6	383	15.9	1190	349	378	**45.6**	**383**	**15.9**	**1190**	**350**	**374**	45.6	383	16.0	1190	350	377
649.fotonik3d_s	128	102	89.5	33.8	303	332	375	**101**	**89.9**	**33.5**	**305**	**331**	**374**	101	90.6	33.3	307	331	375
654.roms_s	128	56.9	277	23.8	741	417	437	**56.2**	**280**	**23.4**	**752**	**417**	**435**	55.3	285	23.1	762	417	436

SPECspeed®2017_fp_base = 188

SPECspeed®2017_fp_energy_base = 593

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.00 GHz, AMD EPYC 7713

SPECspeed®2017_fp_base = 188
SPECspeed®2017_fp_energy_base = 593
SPECspeed®2017_fp_peak = 191
SPECspeed®2017_fp_energy_peak = 601

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	128	**86.6**	**682**	**34.4**	**1870**	**397**	**409**	86.5	682	34.3	1870	397	409	86.8	680	34.3	1880	395	407
607.cactuBSSN_s	128	57.7	289	20.7	879	360	376	58.4	285	21.0	869	359	376	**58.1**	**287**	**21.0**	**867**	**362**	**376**
619.lbm_s	128	52.2	100	18.7	318	358	407	**51.1**	**103**	**18.4**	**323**	**361**	**413**	50.7	103	18.2	327	359	418
621.wrf_s	128	109	121	35.0	412	321	327	**110**	**121**	**35.3**	**409**	**323**	**329**	111	119	35.6	405	322	327
627.cam4_s	128	**65.8**	**135**	**22.7**	**425**	**344**	**386**	66.3	134	22.8	422	345	390	65.6	135	22.8	423	347	390
628.pop2_s	128	**199**	**59.7**	**59.1**	**221**	**297**	**303**	207	57.4	61.4	212	297	303	198	60.0	59.0	221	298	304
638.imagick_s	128	48.5	297	16.2	970	334	427	48.8	295	16.2	970	332	421	**48.7**	**296**	**16.3**	**963**	**335**	**424**
644.nab_s	256	43.7	400	16.5	1150	378	408	43.3	403	16.3	1170	376	409	**43.4**	**403**	**16.4**	**1160**	**379**	**408**
649.fotonik3d_s	128	102	89.5	33.8	303	332	375	**101**	**89.9**	**33.5**	**305**	**331**	**374**	101	90.6	33.3	307	331	375
654.roms_s	128	**50.5**	**312**	**19.5**	**900**	**387**	**416**	50.7	310	19.7	895	388	421	50.2	314	19.5	903	389	421

SPECspeed®2017_fp_peak = **191**

SPECspeed®2017_fp_energy_peak = **601**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_speed_aocc300_milan_A_lib/
     64;/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_speed_aocc300_milan_A_li
     b/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 128 1 129 2 130 3 131 4 132 5 133 6 134 7 135 8 136 9
     137 10 138 11 139 12 140 13 141 14 142 15 143 16 144 17 145 18 146 19
     147 20 148 21 149 22 150 23 151 24 152 25 153 26 154 27 155 28 156 29
     157 30 158 31 159 32 160 33 161 34 162 35 163 36 164 37 165 38 166 39
     167 40 168 41 169 42 170 43 171 44 172 45 173 46 174 47 175 48 176 49
     177 50 178 51 179 52 180 53 181 54 182 55 183 56 184 57 185 58 186 59
     187 60 188 61 189 62 190 63 191 64 192 65 193 66 194 67 195 68 196 69
     197 70 198 71 199 72 200 73 201 74 202 75 203 76 204 77 205 78 206 79
     207 80 208 81 209 82 210 83 211 84 212 85 213 86 214 87 215 88 216 89
     217 90 218 91 219 92 220 93 221 94 222 95 223 96 224 97 225 98 226 99
     227 100 228 101 229 102 230 103 231 104 232 105 233 106 234 107 235 108
     236 109 237 110 238 111 239 112 240 113 241 114 242 115 243 116 244 117
     245 118 246 119 247 120 248 121 249 122 250 123 251 124 252 125 253 126
     254 127 255"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 Operating Mode set to Custom Mode
 Core Performance Boost set to Disable
 Memory Speed set to 3200MHz
 SOC P-States set to P1

 Sysinfo program /home/cpu2017-1.1.5-amd-aocc300-milan-A1/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on localhost Fri Feb 26 00:59:36 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7713 64-Core Processor
       2  "physical id"s (chips)
       256 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 128
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      Address sizes:       48 bits physical, 48 bits virtual
      CPU(s):              256
      On-line CPU(s) list: 0-255
      Thread(s) per core:  2
      Core(s) per socket:  64
      Socket(s):           2
      NUMA node(s):        2
      Vendor ID:           AuthenticAMD
      CPU family:          25
      Model:               1
      Model name:          AMD EPYC 7713 64-Core Processor
      Stepping:            1
      CPU MHz:             1796.250
      CPU max MHz:         2000.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            3992.85
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            32768K
      NUMA node0 CPU(s):   0-63,128-191
      NUMA node1 CPU(s):   64-127,192-255
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
     monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
     rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
     cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
     bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
     xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
     clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
     vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
     umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data
   cache size : 512 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

(Continued on next page)

Platform Notes (Continued)

```
  available: 2 nodes (0-1)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
  57 58 59 60 61 62 63 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143
  144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165
  166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187
  188 189 190 191
  node 0 size: 257782 MB
  node 0 free: 256344 MB
  node 1 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
  89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
  113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 192 193 194 195 196 197 198
  199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220
  221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242
  243 244 245 246 247 248 249 250 251 252 253 254 255
  node 1 size: 258012 MB
  node 1 free: 257087 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

From /proc/meminfo
   MemTotal:       528173864 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP2"
      VERSION_ID="15.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
   Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
   x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                     IBPB: conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Feb 25 21:39

SPEC is set to: /home/cpu2017-1.1.5-amd-aocc300-milan-A1
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb3      xfs   889G   54G  836G   6% /

From /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR645 MB
    Product Family: ThinkSystem
    Serial:         1234567890

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200
    16x Unknown Unknown

BIOS:
   BIOS Vendor:       Lenovo
   BIOS Version:      D8E115B-2.00
   BIOS Date:         02/02/2021
   BIOS Revision:     2.0
   Firmware Revision: 3.0
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp

(Continued on next page)

Peak Optimization Flags (Continued)

603.bwaves_s (continued):
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-C.html
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan-C.xml
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-25 11:59:35-0500.
Report generated on 2021-03-29 16:45:04 by CPU2017 PS formatter v6442.
Originally published on 2021-03-16.