SPEC CPU®2017 Floating Point Rate Result

ZTE Corporation

ZTE R5300G4 Server System
(2.50 GHz, Intel Xeon Gold 6248)

SPECrate®2017_fp_base = 245

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Mar-2021
Hardware Availability: Apr-2019
Software Availability: Apr-2020

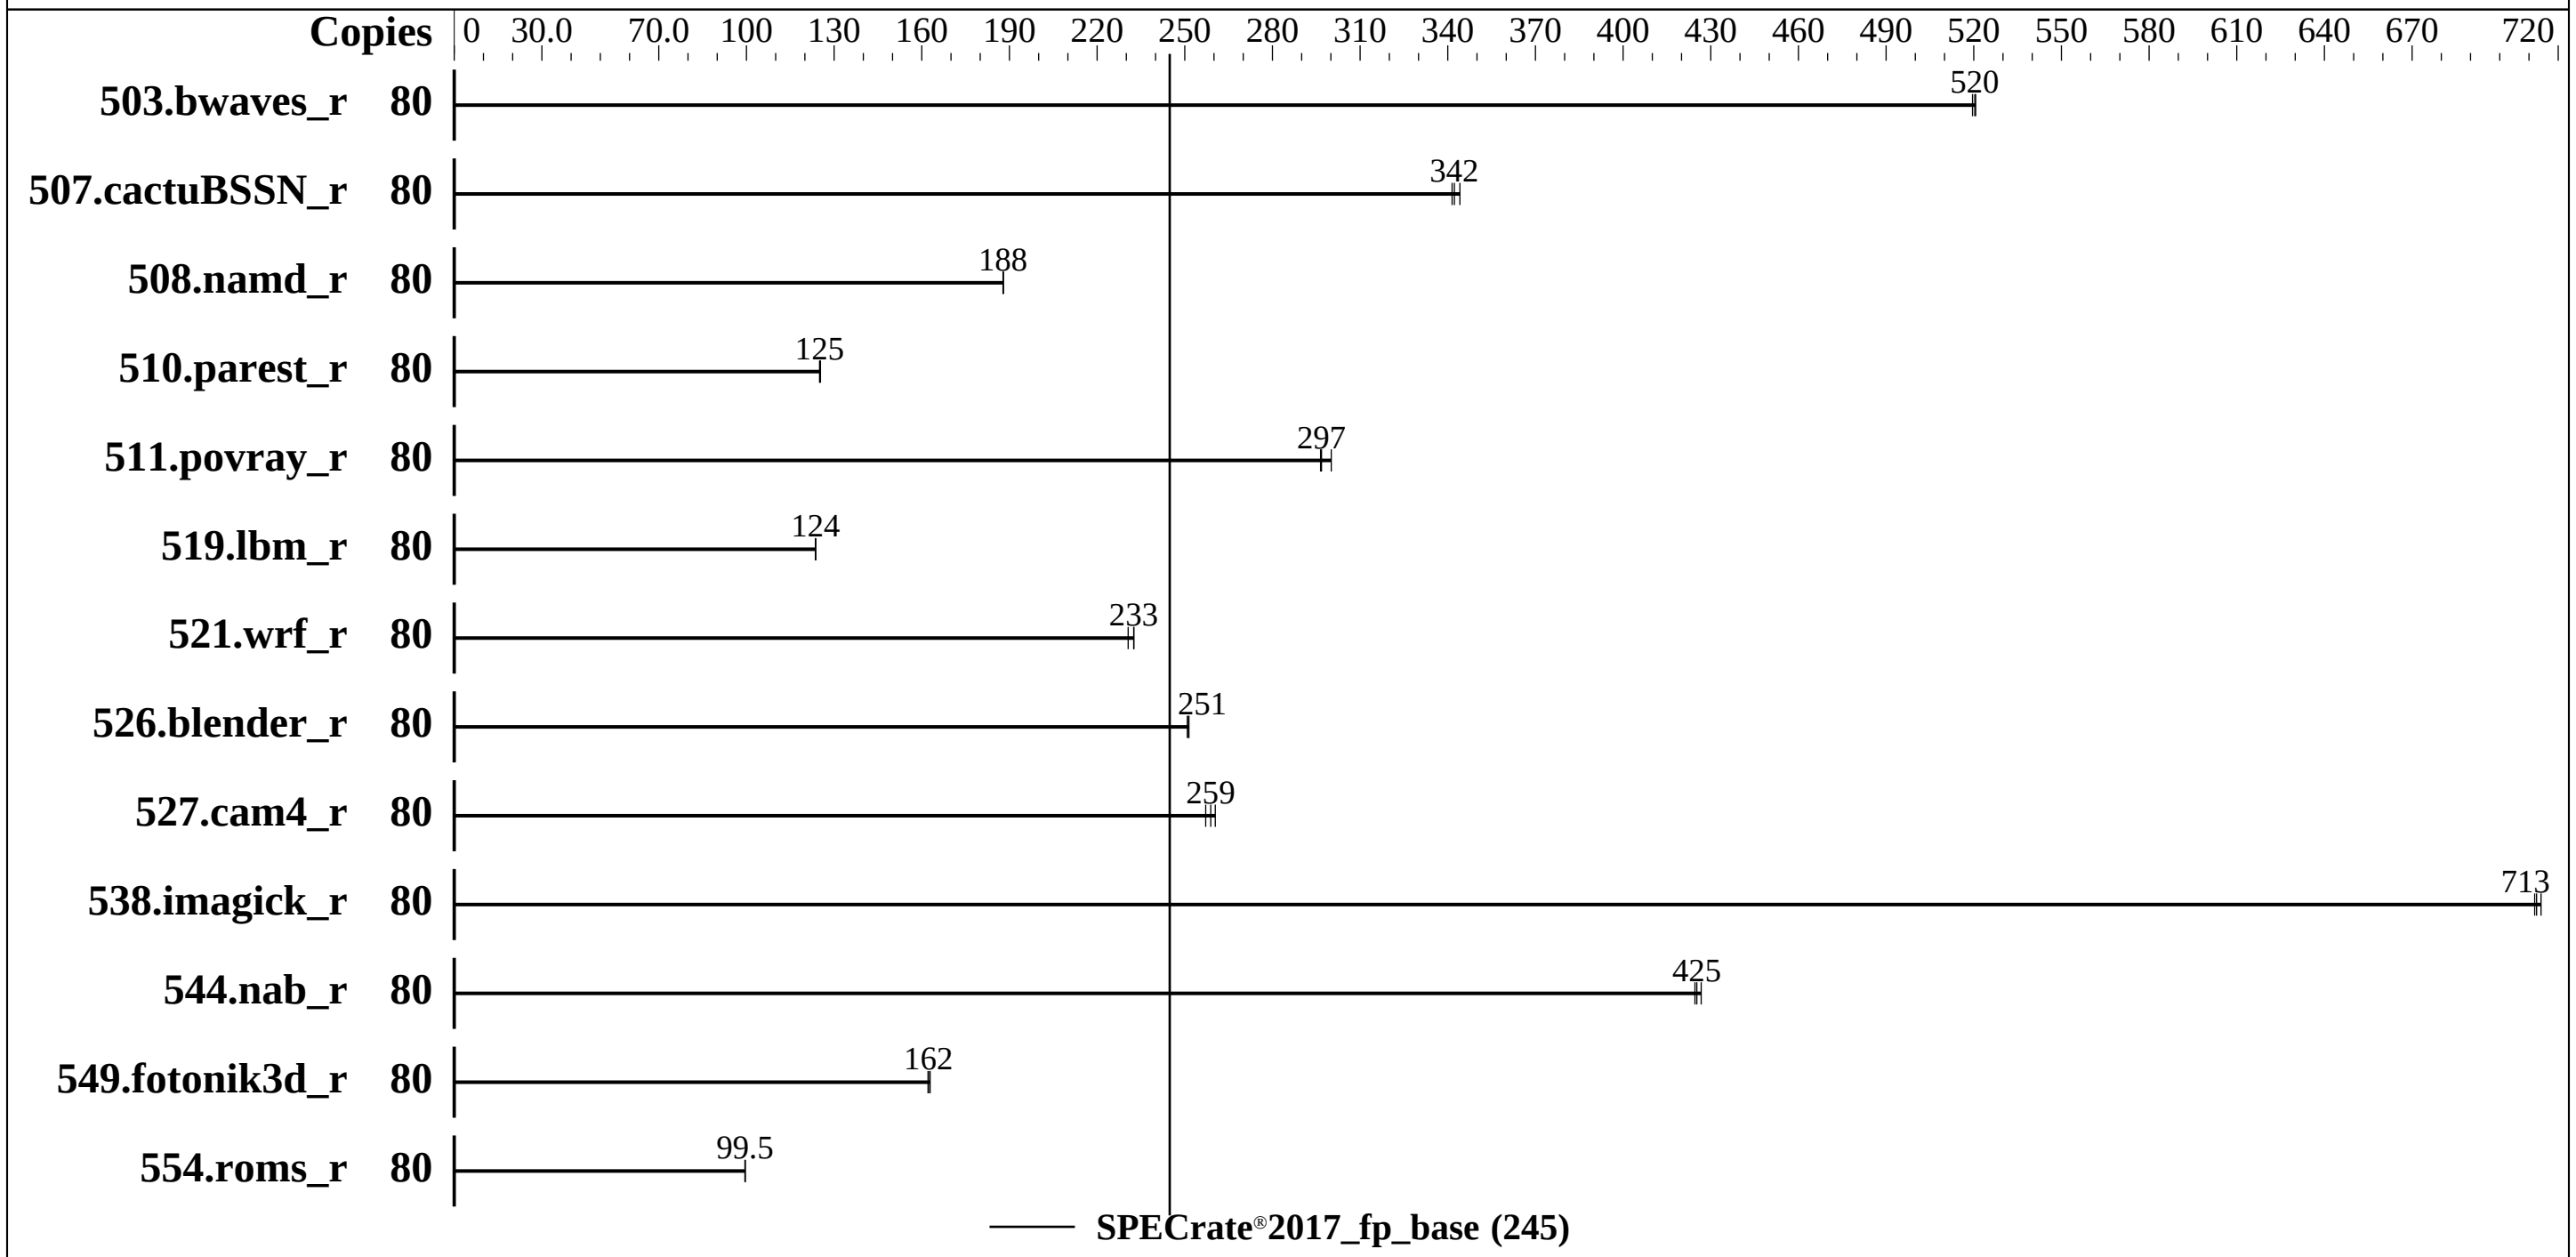

Hardware

CPU Name:	Intel Xeon Gold 6248
Max MHz:	3900
Nominal:	2500
Enabled:	40 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.0 (Ootpa) 4.18.0-80.el8.x86_64
Compiler:	C/C++: Version 19.1.1.217 of Intel C/C++ Compiler Build 20200306 for Linux; Fortran: Version 19.1.1.217 of Intel Fortran Compiler Build 20200306 for Linux
Parallel:	No
Firmware:	Version 03.20.0200 released Dec-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc: jemalloc memory allocator library V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

ZTE Corporation

ZTE R5300G4 Server System
(2.50 GHz, Intel Xeon Gold 6248)

SPECrate®2017_fp_base = 245

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Mar-2021
Hardware Availability: Apr-2019
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1544	520	**1542**	**520**	1541	521							
507.cactuBSSN_r	80	294	344	**296**	**342**	297	341							
508.namd_r	80	404	188	405	188	**405**	**188**							
510.parest_r	80	**1673**	**125**	1670	125	1674	125							
511.povray_r	80	630	296	622	300	**629**	**297**							
519.lbm_r	80	682	124	682	124	**682**	**124**							
521.wrf_r	80	771	233	777	231	**771**	**233**							
526.blender_r	80	485	251	486	251	**485**	**251**							
527.cam4_r	80	**540**	**259**	544	257	537	260							
538.imagick_r	80	279	714	**279**	**713**	279	712							
544.nab_r	80	317	425	316	427	**317**	**425**							
549.fotonik3d_r	80	1923	162	1914	163	**1921**	**162**							
554.roms_r	80	1278	99.5	1277	99.6	**1277**	**99.5**							

SPECrate®2017_fp_base = 245

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The inconsistent Compiler version information under Compiler Version
section is due to a discrepancy in Intel Compiler.
The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec/lib/intel64:/home/spec/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

ZTE Corporation
ZTE R5300G4 Server System
(2.50 GHz, Intel Xeon Gold 6248)

SPECrate®2017_fp_base = 245
SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Mar-2021
Hardware Availability: Apr-2019
Software Availability: Apr-2020

General Notes

```
 Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

The jemalloc library was
configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
VT-d = Disabled
Patrol Scrub = Disabled
ENERGY_PERF_BIAS_CFG mode = performance
SNC = Enabled
IMC interleaving = 1-way
SR-IOV Support = Disabled

 Sysinfo program /home/spec/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on localhost.localdomain Thu Mar 25 21:58:35 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
       2  "physical id"s (chips)
       80 "processors"
```

(Continued on next page)

Platform Notes (Continued)

```
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 20
       siblings  : 40
       physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
       physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

 From lscpu:
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                80
      On-line CPU(s) list:   0-79
      Thread(s) per core:    2
      Core(s) per socket:    20
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 85
      Model name:            Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
      Stepping:              5
      CPU MHz:               3200.009
      CPU max MHz:           3900.0000
      CPU min MHz:           1000.0000
      BogoMIPS:              5000.00
      Virtualization:        VT-x
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              1024K
      L3 cache:              28160K
      NUMA node0 CPU(s):     0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
      NUMA node1 CPU(s):     3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
      NUMA node2 CPU(s):     20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
      NUMA node3 CPU(s):     23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
      mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req pku ospke flush_l1d arch_capabilities
```

(Continued on next page)

Platform Notes (Continued)

```
/proc/cpuinfo cache data
   cache size : 28160 KB

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
  node 0 size: 191851 MB
  node 0 free: 191120 MB
  node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
  node 1 size: 193531 MB
  node 1 free: 192966 MB
  node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
  node 2 size: 193507 MB
  node 2 free: 192497 MB
  node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
  node 3 size: 193498 MB
  node 3 free: 192817 MB
  node distances:
  node   0   1   2   3
    0:  10  11  21  21
    1:  11  10  21  21
    2:  21  21  10  11
    3:  21  21  11  10

From /proc/meminfo
   MemTotal:       790927136 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: latency-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.0 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.0"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
```

(Continued on next page)

Platform Notes (Continued)

```
    system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

 uname -a:
    Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                         No status reported
 CVE-2018-3620 (L1 Terminal Fault):                      Not affected
 Microarchitectural Data Sampling:                       No status reported
 CVE-2017-5754 (Meltdown):                               Not affected
 CVE-2018-3639 (Speculative Store Bypass):               Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
 CVE-2017-5753 (Spectre variant 1):                      Mitigation: __user pointer
                                                         sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Full generic
                                                         retpoline, IBPB: conditional,
                                                        IBRS_FW, STIBP: conditional, RSB
                                                         filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
 CVE-2019-11135 (TSX Asynchronous Abort):                No status reported

 run-level 3 Mar 24 10:13

 SPEC is set to: /home/spec
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   392G  7.7G  385G   2% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         ZTE
     Product Family: Server

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934

 BIOS:
    BIOS Vendor:       ZTE
    BIOS Version:      03.20.0200
    BIOS Date:         12/12/2020
    BIOS Revision:     3.20
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran          | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using both C and C++:
icpc icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.xml

Tested with SPEC CPU®2017 v1.1.5 on 2021-03-25 21:58:34-0400.
Report generated on 2021-04-14 14:13:02 by CPU2017 PS formatter v6442.
Originally published on 2021-04-13.