SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8368Q)

SPECrate®2017_fp_base = 462

SPECrate®2017_fp_peak = 492

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

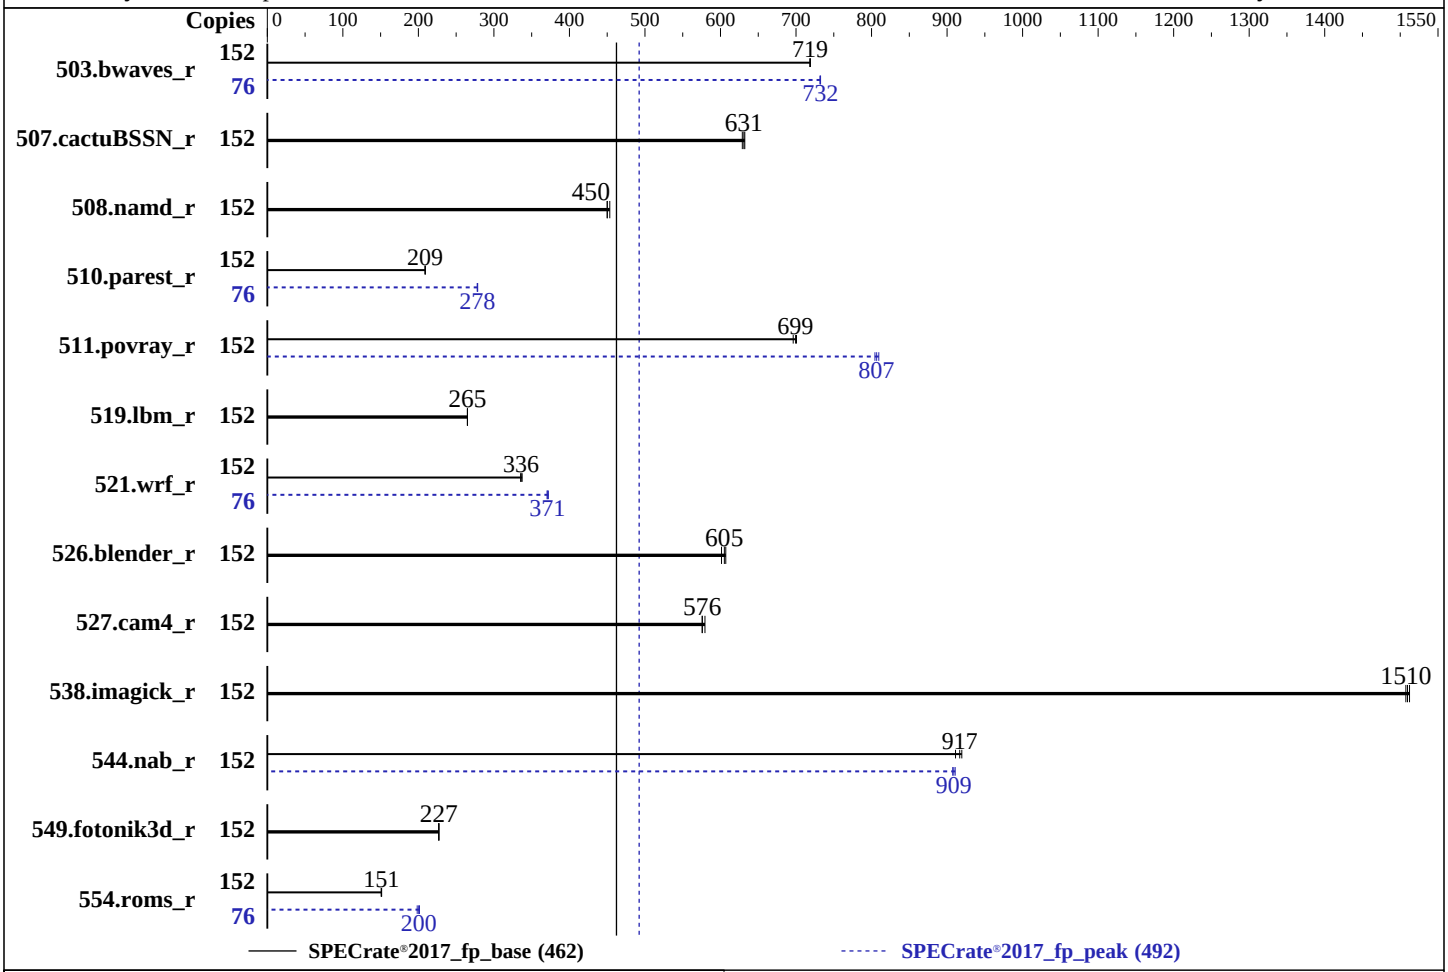

Hardware

CPU Name:	Intel Xeon Platinum 8368Q
Max MHz:	3700
Nominal:	2600
Enabled:	76 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	57 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 512 GB SATA III SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.0 Kernel 4.18.0-80.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version T20210323095242 released Mar-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 740GP-TNRT
(X12DPG-QT6 , Intel Xeon Platinum 8368Q)

SPECrate®2017_fp_base = 462

SPECrate®2017_fp_peak = 492

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	152	2120	719	**2121**	**719**	2122	718	76	1040	733	**1041**	**732**	1042	732
507.cactuBSSN_r	152	**305**	**631**	304	632	306	629	152	**305**	**631**	304	632	306	629
508.namd_r	152	321	450	318	453	**321**	**450**	152	321	450	318	453	**321**	**450**
510.parest_r	152	1901	209	**1901**	**209**	1905	209	76	714	279	**715**	**278**	715	278
511.povray_r	152	510	696	**507**	**699**	507	701	152	441	804	**440**	**807**	438	810
519.lbm_r	152	**605**	**265**	605	265	605	265	152	**605**	**265**	605	265	605	265
521.wrf_r	152	1015	335	**1013**	**336**	1009	337	76	457	372	460	370	**459**	**371**
526.blender_r	152	385	601	381	607	**383**	**605**	152	385	601	381	607	**383**	**605**
527.cam4_r	152	**462**	**576**	462	576	459	579	152	**462**	**576**	462	576	459	579
538.imagick_r	152	250	1510	251	1510	**250**	**1510**	152	250	1510	251	1510	**250**	**1510**
544.nab_r	152	**279**	**917**	281	911	278	920	152	282	907	281	911	**281**	**909**
549.fotonik3d_r	152	**2608**	**227**	2610	227	2608	227	152	**2608**	**227**	2610	227	2608	227
554.roms_r	152	**1599**	**151**	1595	151	1602	151	76	**603**	**200**	599	201	609	198

SPECrate®2017_fp_base = 462

SPECrate®2017_fp_peak = 492

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Patrol Scrub = Disable
SNC = Enable
LLC dead line alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Sun Mar 28 01:34:52 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
      2  "physical id"s (chips)
      152 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 38
      siblings  : 76
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37

From lscpu:
```

(Continued on next page)

Platform Notes (Continued)

```
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                152
      On-line CPU(s) list:   0-151
      Thread(s) per core:    2
      Core(s) per socket:    38
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      CPU family:            6
      Model:                 106
      Model name:            Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
      Stepping:              6
      CPU MHz:               3300.000
      CPU max MHz:           3700.0000
      CPU min MHz:           800.0000
      BogoMIPS:              5200.00
      Virtualization:        VT-x
      L1d cache:             48K
      L1i cache:             32K
      L2 cache:              1280K
      L3 cache:              58368K
      NUMA node0 CPU(s):     0-18,76-94
      NUMA node1 CPU(s):     19-37,95-113
      NUMA node2 CPU(s):     38-56,114-132
      NUMA node3 CPU(s):     57-75,133-151
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
      la57 rdpid pconfig flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 58368 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
```


(Continued on next page)

Platform Notes (Continued)

```
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 76 77 78 79 80 81 82 83 84
  85 86 87 88 89 90 91 92 93 94
  node 0 size: 128760 MB
  node 0 free: 109666 MB
  node 1 cpus: 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 95 96 97 98 99
  100 101 102 103 104 105 106 107 108 109 110 111 112 113
  node 1 size: 128565 MB
  node 1 free: 113724 MB
  node 2 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 114 115 116 117
  118 119 120 121 122 123 124 125 126 127 128 129 130 131 132
  node 2 size: 128992 MB
  node 2 free: 114273 MB
  node 3 cpus: 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 133 134 135 136
  137 138 139 140 141 142 143 144 145 146 147 148 149 150 151
  node 3 size: 129012 MB
  node 3 free: 114370 MB
  node distances:
  node   0   1   2   3
    0:  10  20  20  20
    1:  20  10  20  20
    2:  20  20  10  20
    3:  20  20  20  10

From /proc/meminfo
   MemTotal:       527698252 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.0 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.0"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga
```

(Continued on next page)

Platform Notes (Continued)

```
uname -a:
   Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          No status reported
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        No status reported
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort):                 No status reported

run-level 3 Mar 27 17:28

SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   410G  332G   79G  81% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        Super Server
    Product Family: Family
    Serial:         0123456789

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x SK Hynix HMA84GR7CJR4N-XN 32 GB 2 rank 3200

BIOS:
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      T20210323095242
   BIOS Date:         03/23/2021
   BIOS Revision:     5.22

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:

521.wrf_r: ifort icc

(Continued on next page)

Peak Compiler Invocation (Continued)

527.cam4_r: `ifort icx`

Benchmarks using both C and C++:

511.povray_r: `icpc icc`

526.blender_r: `icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifort`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -flto -Ofast -qopt-mem-layout-trans=4 -fimf-accuracy-bits=14:sqrt -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only`

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r (continued):
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-03-27 13:34:51-0400.
Report generated on 2021-04-14 14:18:34 by CPU2017 PS formatter v6442.
Originally published on 2021-04-13.