SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECrate®2017_fp_base = 286

SPECrate®2017_fp_peak = 287

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

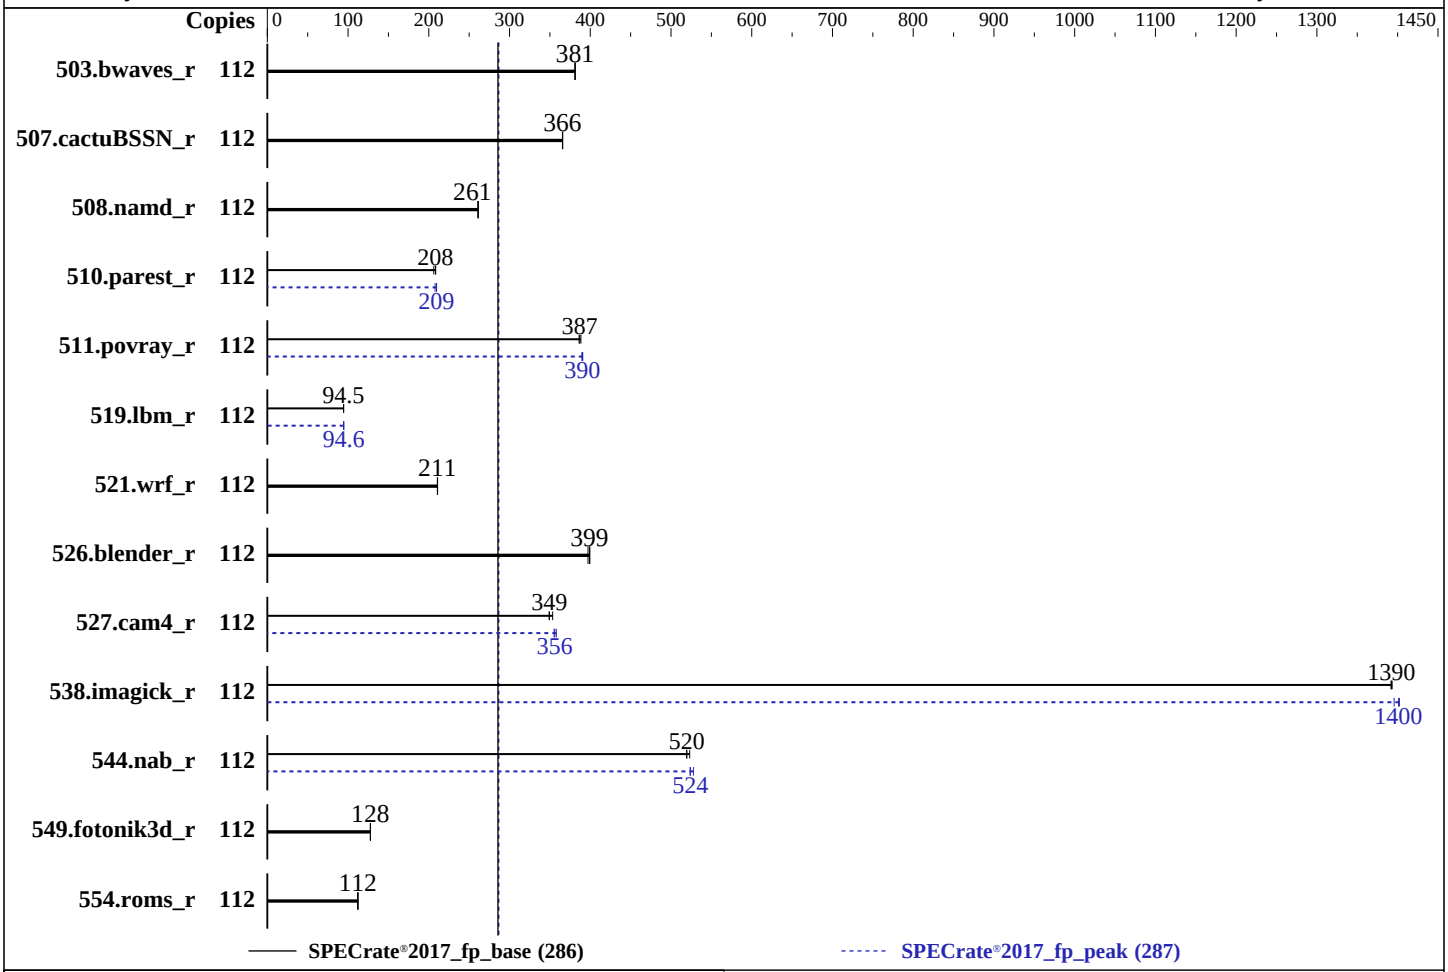

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	56 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	1 x 800 GB SAS SSD, RAID 0
Other:	None

Software

OS:	Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-54-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version A43 v2.40 02/15/2021 released Mar-2021
File System:	ext4
System State:	Run level 5 (multi-user, GUI disabled)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2947	381	**2946**	**381**	2946	381	112	2947	381	**2946**	**381**	2946	381
507.cactuBSSN_r	112	387	366	**388**	**366**	388	366	112	387	366	**388**	**366**	388	366
508.namd_r	112	**408**	**261**	407	261	408	261	112	**408**	**261**	407	261	408	261
510.parest_r	112	1405	209	1421	206	**1407**	**208**	112	1398	210	1410	208	**1399**	**209**
511.povray_r	112	677	386	673	388	**676**	**387**	112	671	390	669	391	**670**	**390**
519.lbm_r	112	**1250**	**94.5**	1250	94.5	1250	94.5	112	1248	94.6	1248	94.6	**1248**	**94.6**
521.wrf_r	112	1190	211	1191	211	**1191**	**211**	112	1190	211	1191	211	**1191**	**211**
526.blender_r	112	429	397	427	399	**427**	**399**	112	429	397	427	399	**427**	**399**
527.cam4_r	112	**561**	**349**	554	353	561	349	112	547	358	552	355	**550**	**356**
538.imagick_r	112	**200**	**1390**	200	1390	200	1390	112	**199**	**1400**	199	1400	200	1400
544.nab_r	112	363	519	**363**	**520**	360	523	112	**360**	**524**	357	528	360	524
549.fotonik3d_r	112	**3418**	**128**	3417	128	3419	128	112	**3418**	**128**	3417	128	3419	128
554.roms_r	112	**1587**	**112**	1589	112	1584	112	112	**1587**	**112**	1589	112	1584	112

SPECrate®2017_fp_base = 286

SPECrate®2017_fp_peak = 287

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
```

(Continued on next page)

Operating System Notes (Continued)

```
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak
runs of 628.pop2_s and 638.imagick_s to enable THP only on request.

The real test date is Apr-2021. The clock was mistakenly set to 2020 before the benchmark was run.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/cpu2017/amd_rate_aocc300_milan_A_lib/64;/cpu2017/amd_rate_aocc300_mila
      n_A_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Peak Frequency Compute
 Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to One memory domain per socket
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  Infinity Fabric Power Management set to Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
  Infinity Fabric Performance State set to P0
 Power Regulator set to OS Control Mode

Sysinfo program /cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on dl325gen10plus Thu Apr  2 01:33:05 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7663 56-Core Processor
      1  "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62

From lscpu:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   48 bits physical, 48 bits virtual
     CPU(s):                          112
     On-line CPU(s) list:             0-111
     Thread(s) per core:              2
     Core(s) per socket:              56
     Socket(s):                       1
     NUMA node(s):                    8
     Vendor ID:                       AuthenticAMD
     CPU family:                      25
     Model:                           1
     Model name:                      AMD EPYC 7663 56-Core Processor
     Stepping:                        1
     CPU MHz:                         2606.904
     BogoMIPS:                        3992.63
     Virtualization:                  AMD-V
     L1d cache:                       1.8 MiB
     L1i cache:                       1.8 MiB
     L2 cache:                        28 MiB
     L3 cache:                        256 MiB
     NUMA node0 CPU(s):               0-6,56-62
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node1 CPU(s):                7-13,63-69
      NUMA node2 CPU(s):                14-20,70-76
      NUMA node3 CPU(s):                21-27,77-83
      NUMA node4 CPU(s):                28-34,84-90
      NUMA node5 CPU(s):                35-41,91-97
      NUMA node6 CPU(s):                42-48,98-104
      NUMA node7 CPU(s):                49-55,105-111
      Vulnerability Itlb multihit:      Not affected
      Vulnerability L1tf:               Not affected
      Vulnerability Mds:                Not affected
      Vulnerability Meltdown:           Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP always-on, RSB filling
      Vulnerability Srbds:              Not affected
      Vulnerability Tsx async abort:    Not affected
      Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
      xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 56 57 58 59 60 61 62
    node 0 size: 128774 MB
    node 0 free: 128459 MB
    node 1 cpus: 7 8 9 10 11 12 13 63 64 65 66 67 68 69
    node 1 size: 129018 MB
    node 1 free: 128670 MB
    node 2 cpus: 14 15 16 17 18 19 20 70 71 72 73 74 75 76
    node 2 size: 129020 MB
    node 2 free: 128834 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 3 cpus: 21 22 23 24 25 26 27 77 78 79 80 81 82 83
   node 3 size: 129019 MB
   node 3 free: 128845 MB
   node 4 cpus: 28 29 30 31 32 33 34 84 85 86 87 88 89 90
   node 4 size: 129020 MB
   node 4 free: 128327 MB
   node 5 cpus: 35 36 37 38 39 40 41 91 92 93 94 95 96 97
   node 5 size: 129019 MB
   node 5 free: 128815 MB
   node 6 cpus: 42 43 44 45 46 47 48 98 99 100 101 102 103 104
   node 6 size: 128996 MB
   node 6 free: 128802 MB
   node 7 cpus: 49 50 51 52 53 54 55 105 106 107 108 109 110 111
   node 7 size: 129006 MB
   node 7 free: 128832 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  12  12  12  12  12  12
     1:  11  10  12  12  12  12  12  12
     2:  12  12  10  11  12  12  12  12
     3:  12  12  11  10  12  12  12  12
     4:  12  12  12  12  10  11  12  12
     5:  12  12  12  12  11  10  12  12
     6:  12  12  12  12  12  12  10  11
     7:  12  12  12  12  12  12  11  10

 From /proc/meminfo
    MemTotal:       1056642672 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Ubuntu 20.04.1 LTS

 From /etc/*release* /etc/*version*
    debian_version: bullseye/sid
    os-release:
       NAME="Ubuntu"
       VERSION="20.04.1 LTS (Focal Fossa)"
       ID=ubuntu
       ID_LIKE=debian
       PRETTY_NAME="Ubuntu 20.04.1 LTS"
       VERSION_ID="20.04"
       HOME_URL="https://www.ubuntu.com/"
       SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
    Linux dl325gen10plus 5.4.0-54-generic #60-Ubuntu SMP Fri Nov 6 10:37:59 UTC 2020
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                        Not affected
  CVE-2018-3620 (L1 Terminal Fault):                     Not affected
  Microarchitectural Data Sampling:                      Not affected
  CVE-2017-5754 (Meltdown):                              Not affected
  CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
  CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
  CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                        IBPB: conditional, IBRS_FW, STIBP:
                                                         always-on, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

  run-level 5 Apr 1 17:25

  SPEC is set to: /cpu2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sdb2      ext4  733G   23G  672G   4% /

  From /sys/devices/virtual/dmi/id
      Vendor:         HPE
      Product:        ProLiant DL325 Gen10 Plus
      Product Family: ProLiant
      Serial:         CN79290FKQ

  Additional information from dmidecode follows.  WARNING: Use caution when you interpret
  this section. The 'dmidecode' program reads system data which is "intended to allow
  hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      8x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
      8x UNKNOWN NOT AVAILABLE

  BIOS:
     BIOS Vendor:       HPE
     BIOS Version:      A43
     BIOS Date:         02/15/2021
     BIOS Revision:     2.40
     Firmware Revision: 2.40
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

538.imagick_r: `Same as 519.lbm_r`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-m64 -std=c++98 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -finline-aggressive -mllvm -unroll-threshold=100 -flv-function-specialization -mllvm -enable-licm-vrp -mllvm -reroll-loops -mllvm -aggressive-loop-unswitch -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -O3 -ffast-math -funroll-loops -mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm -ljemalloc -lflang -lflangrti`

Benchmarks using both C and C++:

511.povray_r: `-m64 -std=c++98 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops -mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 21:33:05-0400.
Report generated on 2021-05-12 13:43:02 by CPU2017 PS formatter v6442.
Originally published on 2021-05-11.