SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.0 GHz, AMD EPYC 7663)

SPECrate®2017_fp_base = 571

SPECrate®2017_fp_peak = 572

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

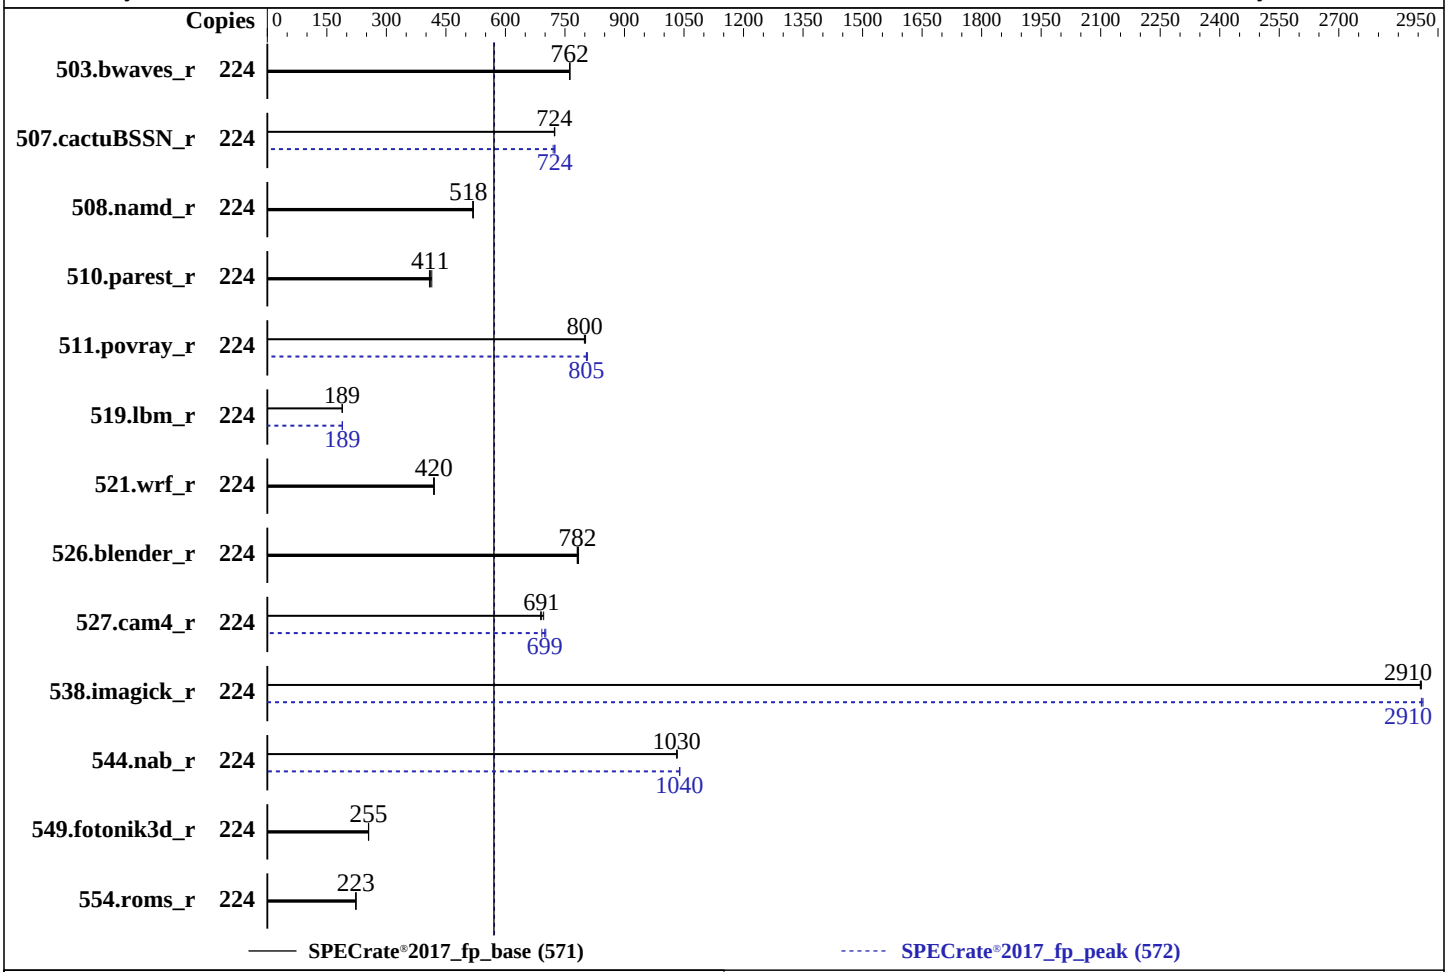

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	1 x 196 GB SATA SSD, RAID 0
Other:	None

Software

OS:	Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-56-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version A42 v2.40 02/23/2021 released Feb-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	**2948**	**762**	2948	762	2946	763	224	**2948**	**762**	2948	762	2946	763
507.cactuBSSN_r	224	391	724	392	723	**392**	**724**	224	**392**	**724**	394	720	391	725
508.namd_r	224	411	518	410	519	**411**	**518**	224	411	518	410	519	**411**	**518**
510.parest_r	224	**1426**	**411**	1434	409	1414	414	224	**1426**	**411**	1434	409	1414	414
511.povray_r	224	**654**	**800**	652	802	655	799	224	648	807	651	804	**650**	**805**
519.lbm_r	224	1250	189	1250	189	**1250**	**189**	224	1249	189	**1249**	**189**	1249	189
521.wrf_r	224	**1196**	**420**	1192	421	1197	419	224	**1196**	**420**	1192	421	1197	419
526.blender_r	224	435	784	437	781	**436**	**782**	224	435	784	437	781	**436**	**782**
527.cam4_r	224	**567**	**691**	563	696	569	689	224	**560**	**699**	558	702	566	692
538.imagick_r	224	**192**	**2910**	192	2910	192	2910	224	**191**	**2910**	191	2910	192	2910
544.nab_r	224	**365**	**1030**	365	1030	365	1030	224	363	1040	**363**	**1040**	363	1040
549.fotonik3d_r	224	3426	255	3418	255	**3422**	**255**	224	3426	255	3418	255	**3422**	**255**
554.roms_r	224	1591	224	**1596**	**223**	1597	223	224	1591	224	**1596**	**223**	1597	223

SPECrate®2017_fp_base = 571

SPECrate®2017_fp_peak = 572

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
```

(Continued on next page)

Operating System Notes (Continued)

'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017n/amd_rate_aocc300_milan_A_lib/64;/home/cpu2017n/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

Submitted_by: "Bucek, James" <james.bucek@hpe.com>
Submitted: Wed May 12 19:01:22 EDT 2021
Submission: cpu2017-20210512-26340.sub

Platform Notes

BIOS Configuration
Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled

(Continued on next page)

Platform Notes (Continued)

```
NUMA memory domains per socket set to Four memory domains per socket
Data Fabric C-State Enable set to Force Enabled
Workload Profile set to Custom
L1 HW Prefetcher set to Disabled

Sysinfo program /home/cpu2017n/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on admin Sun Apr  5 09:30:10 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7663 56-Core Processor
      2  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62

From lscpu:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   48 bits physical, 48 bits virtual
     CPU(s):                          224
     On-line CPU(s) list:             0-223
     Thread(s) per core:              2
     Core(s) per socket:              56
     Socket(s):                       2
     NUMA node(s):                    16
     Vendor ID:                       AuthenticAMD
     CPU family:                      25
     Model:                           1
     Model name:                      AMD EPYC 7663 56-Core Processor
     Stepping:                        1
     Frequency boost:                 enabled
     CPU MHz:                         2027.916
     CPU max MHz:                     2000.0000
```

(Continued on next page)

Platform Notes (Continued)

```
CPU min MHz:                    1500.0000
BogoMIPS:                       3992.50
Virtualization:                 AMD-V
L1d cache:                      3.5 MiB
L1i cache:                      3.5 MiB
L2 cache:                       56 MiB
L3 cache:                       512 MiB
NUMA node0 CPU(s):              0-6,112-118
NUMA node1 CPU(s):              7-13,119-125
NUMA node2 CPU(s):              14-20,126-132
NUMA node3 CPU(s):              21-27,133-139
NUMA node4 CPU(s):              28-34,140-146
NUMA node5 CPU(s):              35-41,147-153
NUMA node6 CPU(s):              42-48,154-160
NUMA node7 CPU(s):              49-55,161-167
NUMA node8 CPU(s):              56-62,168-174
NUMA node9 CPU(s):              63-69,175-181
NUMA node10 CPU(s):             70-76,182-188
NUMA node11 CPU(s):             77-83,189-195
NUMA node12 CPU(s):             84-90,196-202
NUMA node13 CPU(s):             91-97,203-209
NUMA node14 CPU(s):             98-104,210-216
NUMA node15 CPU(s):             105-111,217-223
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:             Not affected
Vulnerability Mds:              Not affected
Vulnerability Meltdown:         Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:       Mitigation; Full AMD retpoline, IBPB conditional,
IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:            Not affected
Vulnerability Tsx async abort:  Not affected
Flags:                          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

(Continued on next page)

Platform Notes (Continued)

```
 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118
   node 0 size: 128775 MB
   node 0 free: 128517 MB
   node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125
   node 1 size: 129018 MB
   node 1 free: 128785 MB
   node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
   node 2 size: 129020 MB
   node 2 free: 128758 MB
   node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
   node 3 size: 129019 MB
   node 3 free: 128819 MB
   node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
   node 4 size: 128996 MB
   node 4 free: 128702 MB
   node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
   node 5 size: 129019 MB
   node 5 free: 128795 MB
   node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
   node 6 size: 129020 MB
   node 6 free: 128831 MB
   node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
   node 7 size: 129007 MB
   node 7 free: 128734 MB
   node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
   node 8 size: 129020 MB
   node 8 free: 128857 MB
   node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
   node 9 size: 129019 MB
   node 9 free: 128811 MB
   node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
   node 10 size: 129020 MB
   node 10 free: 128866 MB
   node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
   node 11 size: 129019 MB
   node 11 free: 128861 MB
   node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
   node 12 size: 129020 MB
   node 12 free: 128859 MB
   node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
```

(Continued on next page)

Platform Notes (Continued)

```
   node 13 size: 129019 MB
   node 13 free: 128862 MB
   node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
   node 14 size: 129020 MB
   node 14 free: 128860 MB
   node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
   node 15 size: 129017 MB
   node 15 free: 128856 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
     3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
     4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
     5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

 From /proc/meminfo
    MemTotal:       2113576940 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: balanced

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 /usr/bin/lsb_release -d
    Ubuntu 20.04.1 LTS

 From /etc/*release* /etc/*version*
    debian_version: bullseye/sid
    os-release:
       NAME="Ubuntu"
       VERSION="20.04.1 LTS (Focal Fossa)"
       ID=ubuntu
```

(Continued on next page)

Platform Notes (Continued)

```
       ID_LIKE=debian
       PRETTY_NAME="Ubuntu 20.04.1 LTS"
       VERSION_ID="20.04"
       HOME_URL="https://www.ubuntu.com/"
       SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
    Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86_64 x86_64
    x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl and
                                                          seccomp
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                        IBPB: conditional, IBRS_FW, STIBP:
                                                          always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 5 Apr 1 17:24

 SPEC is set to: /home/cpu2017n
    Filesystem                     Type  Size  Used Avail Use% Mounted on
    /dev/mapper/ubuntu--vg-ubuntu--lv ext4  196G   50G  137G  27% /

 From /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL365 Gen10 Plus
     Product Family: ProLiant
     Serial:         CN70430NKR

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
     16x UNKNOWN NOT AVAILABLE
```

(Continued on next page)

Platform Notes (Continued)

```
 BIOS:
    BIOS Vendor:       HPE
    BIOS Version:      A42
    BIOS Date:         02/23/2021
    BIOS Revision:     2.40
    Firmware Revision: 2.40

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

538.imagick_r: `Same as 519.lbm_r`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `basepeak = yes`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching -Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast -march=znver3 -fveclib=AMDLIBM -fstruct-layout=7`

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r (continued):
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-05 05:30:10-0400.
Report generated on 2021-06-08 19:51:38 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.