



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation


ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

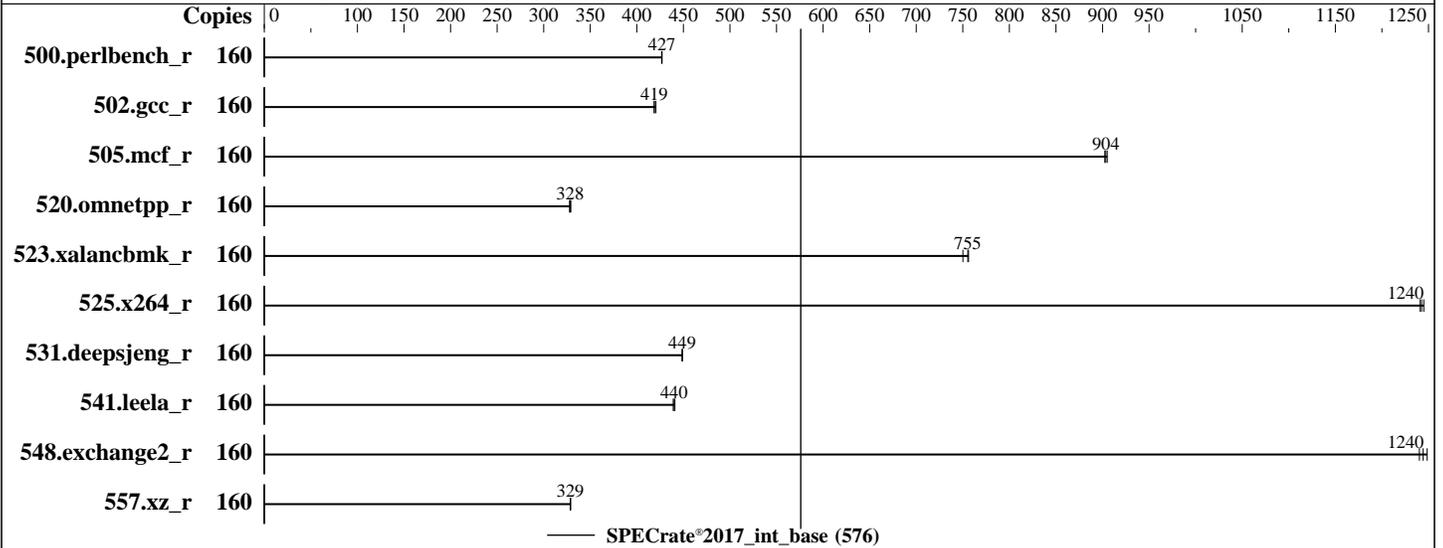

### Hardware

CPU Name: Intel Xeon Platinum 8380  
Max MHz: 3400  
Nominal: 2300  
Enabled: 80 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1.25 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
Storage: 2 x 480 GB SATA SSD,RAID1  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86\_64  
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
Parallel: No  
Firmware: Version 00.00.0001 released May-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: May-2021  
Hardware Availability: Apr-2021  
Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	597	427	<b>597</b>	<b>427</b>	597	427							
502.gcc_r	160	<b>541</b>	<b>419</b>	541	419	539	421							
505.mcf_r	160	286	905	287	902	<b>286</b>	<b>904</b>							
520.omnetpp_r	160	641	328	638	329	<b>639</b>	<b>328</b>							
523.xalancbmk_r	160	<b>224</b>	<b>755</b>	223	756	225	750							
525.x264_r	160	225	1240	226	1240	<b>225</b>	<b>1240</b>							
531.deepsjeng_r	160	409	449	409	449	<b>409</b>	<b>449</b>							
541.leela_r	160	603	439	601	441	<b>602</b>	<b>440</b>							
548.exchange2_r	160	338	1240	<b>337</b>	<b>1240</b>	336	1250							
557.xz_r	160	<b>526</b>	<b>329</b>	525	329	526	329							

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/speccpu2017/lib/intel64:/home/speccpu2017/lib/ia32:/home/speccpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Configuration:  
Intel VT for Directed I/O (VT-d) = Disabled  
Patrol Scrub = Disabled  
ENERGY\_PERF\_BIAS\_CFG mode = performance  
SNC = Enabled  
LLC dead line alloc = Disabled

sysinfo program /home/speccpu2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Thu May 20 15:50:11 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz  
2 "physical id"s (chips)  
160 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 40  
siblings : 80  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 160  
On-line CPU(s) list: 0-159  
Thread(s) per core: 2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

Core(s) per socket: 40
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping: 6
CPU MHz: 3000.066
CPU max MHz: 2301.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 61440K
NUMA node0 CPU(s): 0-19,80-99
NUMA node1 CPU(s): 20-39,100-119
NUMA node2 CPU(s): 40-59,120-139
NUMA node3 CPU(s): 60-79,140-159
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
88 89 90 91 92 93 94 95 96 97 98 99
node 0 size: 124431 MB
node 0 free: 118722 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```

node 1 size: 125441 MB
node 1 free: 121153 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
node 2 size: 125271 MB
node 2 free: 121039 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
node 3 size: 125260 MB
node 3 free: 121316 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

```

From /proc/meminfo
MemTotal:      527651520 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 May 20 14:10

SPEC is set to: /home/speccpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	372G	164G	209G	44%	/home

From /sys/devices/virtual/dmi/id

Vendor:	ZTE
Product:	R5300 G4X
Product Family:	Server
Serial:	201234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMA84GR7DJR4N-XN	32 GB	2 rank	3200
16x NO DIMM	NO DIMM		

BIOS:

BIOS Vendor:	ZTE
BIOS Version:	00.00.0001
BIOS Date:	2021/05/15
BIOS Revision:	0.0

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ZTE Corporation**

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017\_int\_base = 576

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** May-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2020

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.2.xml>



# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4X Server System  
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate<sup>®</sup>2017\_int\_base = 576

SPECrate<sup>®</sup>2017\_int\_peak = Not Run

**CPU2017 License:** 9061

**Test Sponsor:** ZTE Corporation

**Tested by:** ZTE Corporation

**Test Date:** May-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Dec-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.5 on 2021-05-20 15:50:10-0400.

Report generated on 2021-06-08 19:50:51 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.