SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_int_base = 602

SPECrate®2017_int_peak = 625

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

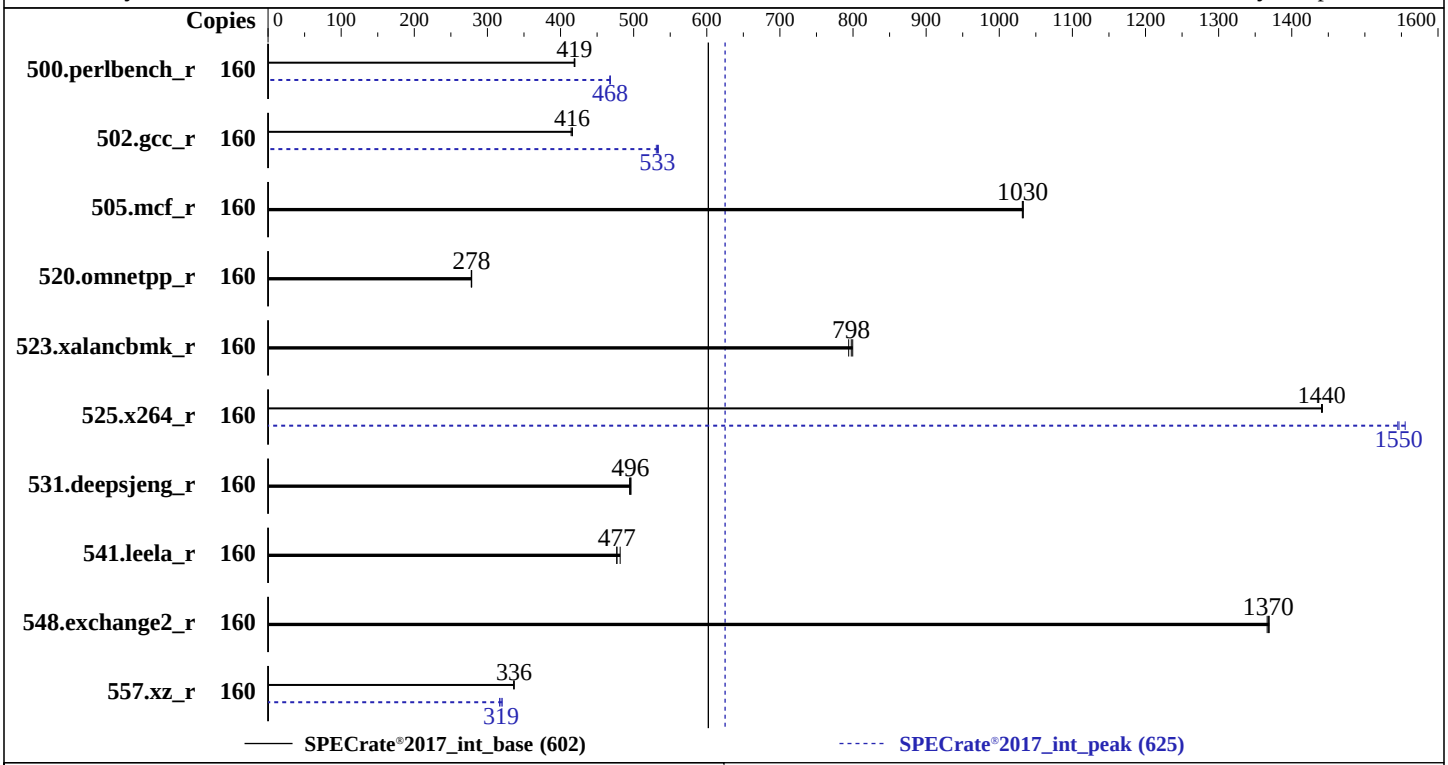

Hardware

CPU Name:	Intel Xeon Platinum 8380
Max MHz:	3400
Nominal:	2300
Enabled:	80 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	4 TB (32 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	1x 2 TB SATA HDD, 7200RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 Kernel 5.3.18-24.61-preempt
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Nettrix BIOS Version 0PYH001029 released Apr-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Nettrix

R620 G40(Intel Xeon Platinum 8380 CPU @ 2.30GHz)

SPECrate®2017_int_base = 602

SPECrate®2017_int_peak = 625

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: May-2021
Hardware Availability: Apr-2021
Software Availability: Apr-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	607	420	**608**	**419**	608	419	160	544	468	545	467	**544**	**468**
502.gcc_r	160	547	414	544	416	**545**	**416**	160	**425**	**533**	427	531	424	534
505.mcf_r	160	**250**	**1030**	250	1030	251	1030	160	**250**	**1030**	250	1030	251	1030
520.omnetpp_r	160	**754**	**278**	754	278	755	278	160	**754**	**278**	754	278	755	278
523.xalancbmk_r	160	211	800	**212**	**798**	213	794	160	211	800	**212**	**798**	213	794
525.x264_r	160	194	1440	194	1440	**194**	**1440**	160	180	1560	**181**	**1550**	181	1540
531.deepsjeng_r	160	371	494	**370**	**496**	369	496	160	371	494	**370**	**496**	369	496
541.leela_r	160	550	482	**555**	**477**	556	477	160	550	482	**555**	**477**	556	477
548.exchange2_r	160	306	1370	307	1370	**306**	**1370**	160	306	1370	307	1370	**306**	**1370**
557.xz_r	160	514	336	**514**	**336**	513	337	160	546	317	540	320	**542**	**319**

SPECrate®2017_int_base = 602

SPECrate®2017_int_peak = 625

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tuning Kernel Parameters:
  sched_migration_cost_ns=1000
  sched_rt_runtime_us=990000
  sched_latency_ns=24000000
  sched_min_granularity_ns=8000000
  dirty_background_ratio=10
  dirty_ratio=40
  dirty_writeback_centisecs=1500
  dirty_expire_centisecs=10000
  swappiness=10
  numa_balancing=0
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/admin/benchmarks/SPECcpu2017/lib/intel64:/home/admin/benchmarks/S
     PECcpu2017/lib/ia32:/home/admin/benchmarks/SPECcpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM
memory using openSUSE Leap 15.2
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
  is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0D000280 for
the Intel Xeon Platinum 8380 processor.
 BIOS Configuration:
   Application Performance Profile Set to Computing Throughput Mode
   SNC set to Enable SNC2(2-clusters)
   XPT Prefetch set to Enabled
   KTI Prefetch set to Disabled
   Stale AtoS set to Enabled
   Patrol Scrub set to Disabled
   LLC Dead Line Allocation set to Disabled
 BMC Settings:
   Cooling Policy set to Manual Mode
   Fan Duty set to 95

 Sysinfo program /home/admin/benchmarks/SPECcpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Fri May 21 09:35:29 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       2  "physical id"s (chips)
       160 "processors"
```

(Continued on next page)

Platform Notes (Continued)

```
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 40
       siblings  : 80
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

  From lscpu from util-linux 2.33.1:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       Address sizes:       46 bits physical, 57 bits virtual
       CPU(s):              160
       On-line CPU(s) list: 0-159
       Thread(s) per core:  2
       Core(s) per socket:  40
       Socket(s):           2
       NUMA node(s):        4
       Vendor ID:           GenuineIntel
       CPU family:          6
       Model:               106
       Model name:          Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       Stepping:            6
       CPU MHz:             1143.043
       CPU max MHz:         3400.0000
       CPU min MHz:         800.0000
       BogoMIPS:            4600.00
       Virtualization:      VT-x
       L1d cache:           48K
       L1i cache:           32K
       L2 cache:            1280K
       L3 cache:            61440K
       NUMA node0 CPU(s):   0-19,80-99
       NUMA node1 CPU(s):   20-39,100-119
       NUMA node2 CPU(s):   40-59,120-139
       NUMA node3 CPU(s):   60-79,140-159
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
       aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
       avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
       mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
       fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
       avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
```


(Continued on next page)

Platform Notes (Continued)

```
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
      la57 rdpid md_clear pconfig flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 61440 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
   88 89 90 91 92 93 94 95 96 97 98 99
   node 0 size: 1031771 MB
   node 0 free: 1020862 MB
   node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
   103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
   node 1 size: 1032181 MB
   node 1 free: 1023501 MB
   node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
   123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
   node 2 size: 1032147 MB
   node 2 free: 1022794 MB
   node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
   143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
   node 3 size: 1032178 MB
   node 3 free: 1023940 MB
   node distances:
   node   0   1   2   3
     0:  10  11  20  20
     1:  11  10  20  20
     2:  20  20  10  11
     3:  20  20  11  10

 From /proc/meminfo
    MemTotal:       4227358284 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    ondemand

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP2"
       VERSION_ID="15.2"
```


(Continued on next page)

Platform Notes (Continued)

```
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15:sp2"

 uname -a:
    Linux localhost 5.3.18-24.61-preempt #1 SMP PREEMPT Wed Apr 14 10:10:07 UTC 2021
    (c41a65c) x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl and
                                                          seccomp
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                          conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 5 May 20 09:26

 SPEC is set to: /home/admin/benchmarks/SPECcpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sdc1      ext4  1.4T   92G  1.2T   7% /home/admin/benchmarks/SPECcpu2017

 From /sys/devices/virtual/dmi/id
     Vendor:         Nettrix
     Product:        N/A
     Product Family: Family
     Serial:         N/A

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Hynix HMABAGL7ABR4N-XN 128 GB 4 rank 3200

 BIOS:
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      0PYH001029
    BIOS Date:         04/14/2021
    BIOS Revision:     0.29

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
```


(Continued on next page)

Compiler Version Notes (Continued)

```
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2)
`-xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -fno-strict-overflow`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

502.gcc_r: `-m32`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin`
`-std=gnu89 -Wl,-z,muldefs -fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX512 -flto`
`-Ofast`(pass 1) `-O3 -ffast-math -qopt-mem-layout-trans=4`
`-mbranches-within-32B-boundaries`
`-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc`

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto`
`-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

557.xz_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V4.0-ICX-revC.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V4.0-ICX-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-20 21:35:28-0400.
Report generated on 2021-06-17 11:18:04 by CPU2017 PS formatter v6442.
Originally published on 2021-06-16.