SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_fp_base = 233

SPECspeed®2017_fp_peak = 237

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

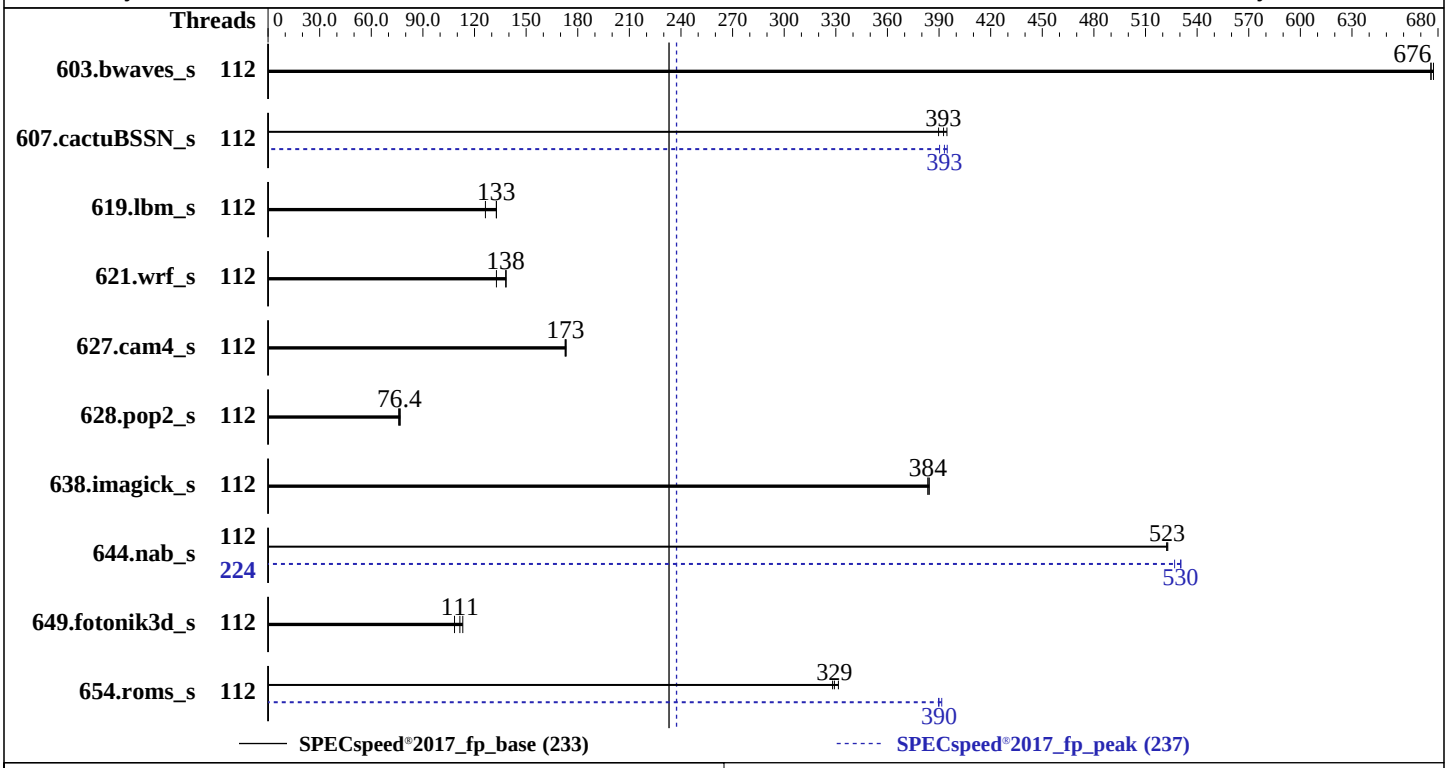

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	1 x 182 GB SATA SSD, RAID 0
Other:	None

Software

OS:	Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-42-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	HPE BIOS Version A42 v2.40 02/15/2021 released Feb-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	87.3	676	**87.3**	**676**	87.1	677	112	87.3	676	**87.3**	**676**	87.1	677
607.cactuBSSN_s	112	42.2	395	**42.5**	**393**	42.8	390	112	**42.4**	**393**	42.7	390	42.2	395
619.lbm_s	112	39.5	133	**39.5**	**133**	41.5	126	112	39.5	133	**39.5**	**133**	41.5	126
621.wrf_s	112	95.6	138	99.6	133	**95.8**	**138**	112	95.6	138	99.6	133	**95.8**	**138**
627.cam4_s	112	51.1	173	51.3	173	**51.3**	**173**	112	51.1	173	51.3	173	**51.3**	**173**
628.pop2_s	112	**155**	**76.4**	156	75.9	155	76.8	112	**155**	**76.4**	156	75.9	155	76.8
638.imagick_s	112	**37.6**	**384**	37.6	384	37.5	384	112	**37.6**	**384**	37.6	384	37.5	384
644.nab_s	112	**33.4**	**523**	33.4	523	33.5	522	224	32.9	531	**32.9**	**530**	33.2	527
649.fotonik3d_s	112	**81.8**	**111**	84.1	108	80.5	113	112	**81.8**	**111**	84.1	108	80.5	113
654.roms_s	112	48.0	328	**47.8**	**329**	47.5	331	112	**40.4**	**390**	40.2	392	40.4	390

SPECspeed®2017_fp_base = **233**

SPECspeed®2017_fp_peak = **237**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-223"
LD_LIBRARY_PATH =
     "/home/cpu2017_B1/amd_speed_aocc300_milan_B_lib/64;/home/cpu2017_B1/amd_
     speed_aocc300_milan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "224"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-111"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 112 1 113 2 114 3 115 4 116 5 117 6 118 7 119 8 120 9
     121 10 122 11 123 12 124 13 125 14 126 15 127 16 128 17 129 18 130 19
     131 20 132 21 133 22 134 23 135 24 136 25 137 26 138 27 139 28 140 29
     141 30 142 31 143 32 144 33 145 34 146 35 147 36 148 37 149 38 150 39
     151 40 152 41 153 42 154 43 155 44 156 45 157 46 158 47 159 48 160 49
     161 50 162 51 163 52 164 53 165 54 166 55 167 56 168 57 169 58 170 59
     171 60 172 61 173 62 174 63 175 64 176 65 177 66 178 67 179 68 180 69
     181 70 182 71 183 72 184 73 185 74 186 75 187 76 188 77 189 78 190 79
     191 80 192 81 193 82 194 83 195 84 196 85 197 86 198 87 199 88 200 89
     201 90 202 91 203 92 204 93 205 94 206 95 207 96 208 97 209 98 210 99
     211 100 212 101 213 102 214 103 215 104 216 105 217 106 218 107 219 108
     220 109 221 110 222 111 223"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-111"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

Submitted_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>
Submitted: Mon May 24 12:49:23 EDT 2021
Submission: cpu2017-20210524-26460.sub
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Peak Frequency Compute
 Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to One memory domain per socket
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
 Infinity Fabric Power Management set to Disabled
  Infinity Fabric Performance State set to P0
 Power Regulator set to OS Control Mode

 Sysinfo program /home/cpu2017_B1/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on dl385g10v2 Wed Apr  1 12:27:01 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7663 56-Core Processor
       2  "physical id"s (chips)
       224 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 56
```

(Continued on next page)

Platform Notes (Continued)

```
        siblings  : 112
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
        28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
        60 61 62
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
        28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
        60 61 62

  From lscpu:
       Architecture:                    x86_64
       CPU op-mode(s):                  32-bit, 64-bit
       Byte Order:                      Little Endian
       Address sizes:                   48 bits physical, 48 bits virtual
       CPU(s):                          224
       On-line CPU(s) list:             0-223
       Thread(s) per core:              2
       Core(s) per socket:              56
       Socket(s):                       2
       NUMA node(s):                    16
       Vendor ID:                       AuthenticAMD
       CPU family:                      25
       Model:                           1
       Model name:                      AMD EPYC 7663 56-Core Processor
       Stepping:                        1
       Frequency boost:                 enabled
       CPU MHz:                         1798.973
       CPU max MHz:                     2000.0000
       CPU min MHz:                     1500.0000
       BogoMIPS:                        3992.74
       Virtualization:                  AMD-V
       L1d cache:                       3.5 MiB
       L1i cache:                       3.5 MiB
       L2 cache:                        56 MiB
       L3 cache:                        512 MiB
       NUMA node0 CPU(s):               0-6,112-118
       NUMA node1 CPU(s):               7-13,119-125
       NUMA node2 CPU(s):               14-20,126-132
       NUMA node3 CPU(s):               21-27,133-139
       NUMA node4 CPU(s):               28-34,140-146
       NUMA node5 CPU(s):               35-41,147-153
       NUMA node6 CPU(s):               42-48,154-160
       NUMA node7 CPU(s):               49-55,161-167
       NUMA node8 CPU(s):               56-62,168-174
       NUMA node9 CPU(s):               63-69,175-181
       NUMA node10 CPU(s):              70-76,182-188
       NUMA node11 CPU(s):              77-83,189-195
       NUMA node12 CPU(s):              84-90,196-202
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node13 CPU(s):              91-97,203-209
      NUMA node14 CPU(s):              98-104,210-216
      NUMA node15 CPU(s):              105-111,217-223
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
      xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118
    node 0 size: 128774 MB
    node 0 free: 128327 MB
    node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125
    node 1 size: 129020 MB
    node 1 free: 128770 MB
    node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
    node 2 size: 129020 MB
    node 2 free: 128865 MB
    node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
    node 3 size: 129020 MB
    node 3 free: 128766 MB
    node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
```

(Continued on next page)

Platform Notes (Continued)

```
node 4 size: 129020 MB
node 4 free: 128722 MB
node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
node 5 size: 129020 MB
node 5 free: 128868 MB
node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
node 6 size: 129020 MB
node 6 free: 128866 MB
node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
node 7 size: 116907 MB
node 7 free: 116767 MB
node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
node 8 size: 129020 MB
node 8 free: 128755 MB
node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
node 9 size: 129020 MB
node 9 free: 128862 MB
node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
node 10 size: 129020 MB
node 10 free: 128839 MB
node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
node 11 size: 129020 MB
node 11 free: 128852 MB
node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
node 12 size: 129020 MB
node 12 free: 128803 MB
node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
node 13 size: 128996 MB
node 13 free: 128815 MB
node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
node 14 size: 129020 MB
node 14 free: 128858 MB
node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
node 15 size: 129014 MB
node 15 free: 128825 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  1:  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  2:  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32
  3:  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32
  4:  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32
  5:  11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32
  6:  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32
  7:  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32
  8:  32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11
  9:  32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11
```

(Continued on next page)

Platform Notes (Continued)

```
    10:  32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11
    11:  32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11
    12:  32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11
    13:  32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11
    14:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11
    15:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  10

  From /proc/meminfo
     MemTotal:       2101189948 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  /usr/bin/lsb_release -d
     Ubuntu 20.04.1 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04.1 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04.1 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux dl385g10v2 5.4.0-42-generic #46-Ubuntu SMP Fri Jul 10 00:24:02 UTC 2020 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                    Not affected
  CVE-2018-3620 (L1 Terminal Fault):                 Not affected
  Microarchitectural Data Sampling:                  Not affected
  CVE-2017-5754 (Meltdown):                          Not affected
  CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                     Bypass disabled via prctl and
                                                     seccomp
  CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
```

(Continued on next page)

Platform Notes (Continued)

```
                                                    barriers and __user pointer
                                                    sanitization
 CVE-2017-5715 (Spectre variant 2):                 Mitigation: Full AMD retpoline,
                                                   IBPB: conditional, IBRS_FW, STIBP:
                                                    always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):           Not affected

 run-level 5 Apr 1 12:24

 SPEC is set to: /home/cpu2017_B1
    Filesystem                     Type  Size  Used Avail Use% Mounted on
    /dev/mapper/ubuntu--vg-ubuntu--lv ext4  182G   67G  106G  39% /

 From /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL385 Gen10 Plus
     Product Family: ProLiant
     Serial:         CN79340HC3

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
     16x UNKNOWN NOT AVAILABLE

 BIOS:
    BIOS Vendor:       HPE
    BIOS Version:      A42
    BIOS Date:         02/15/2021
    BIOS Revision:     2.40
    Firmware Revision: 2.40

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 13:27:00-0400.
Report generated on 2022-07-08 13:00:36 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.