SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECrate®2017_int_base = 706

SPECrate®2017_int_peak = 741

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

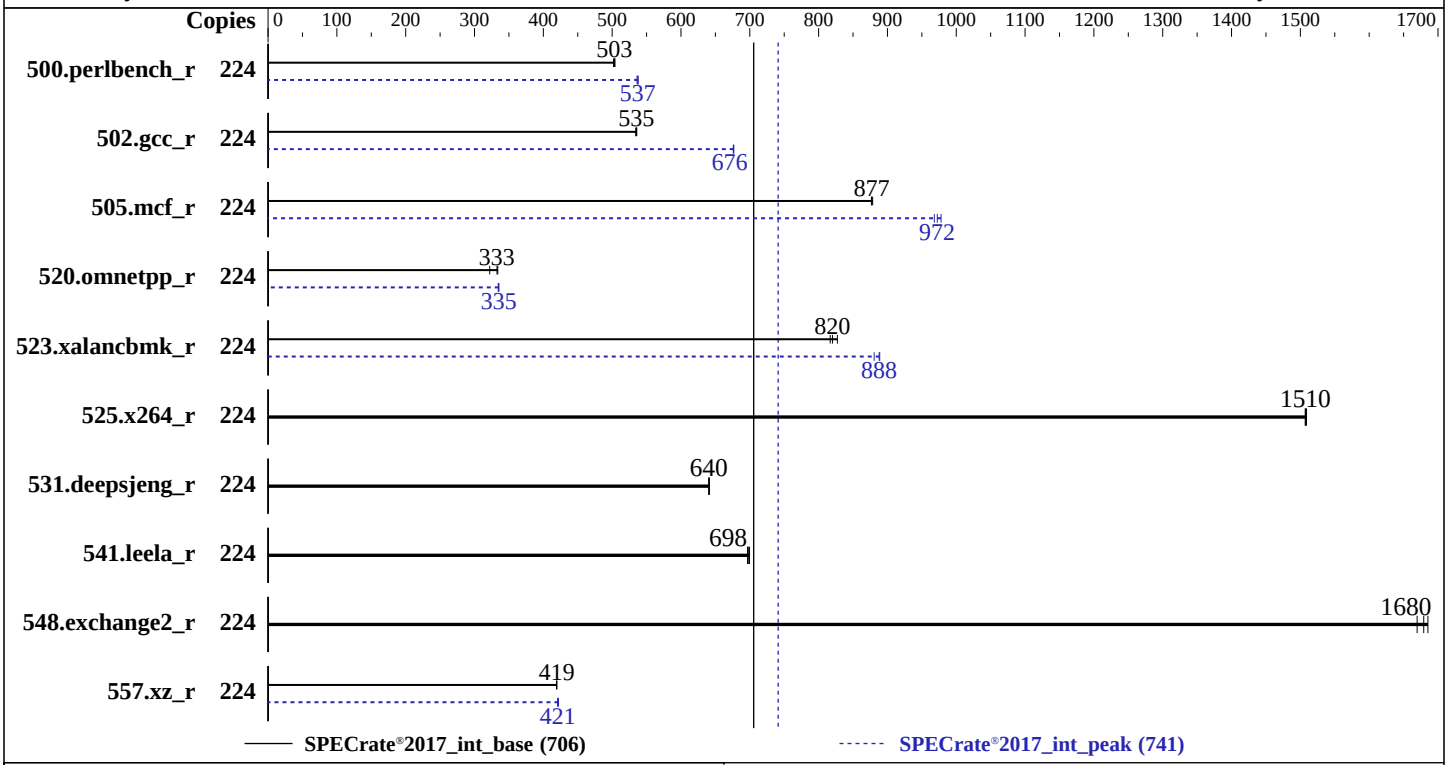

Hardware

CPU Name:	AMD EPYC 7663
Max MHz:	3500
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	1 x 182 GB SATA SSD, RAID 0
Other:	None

Software

OS:	Ubuntu 20.04.1 LTS (x86_64) Kernel 5.4.0-42-generic
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version A42 v2.40 02/15/2021 released Feb-2021
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECrate®2017_int_base = 706

SPECrate®2017_int_peak = 741

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	710	502	707	504	**708**	**503**	224	663	538	**664**	**537**	665	536
502.gcc_r	224	592	536	**592**	**535**	594	534	224	**469**	**676**	469	676	469	677
505.mcf_r	224	**413**	**877**	412	879	413	877	224	374	968	**372**	**972**	370	978
520.omnetpp_r	224	912	322	880	334	**883**	**333**	224	877	335	**877**	**335**	879	334
523.xalancbmk_r	224	**288**	**820**	290	817	286	827	224	266	889	**266**	**888**	269	881
525.x264_r	224	260	1510	**260**	**1510**	260	1510	224	260	1510	**260**	**1510**	260	1510
531.deepsjeng_r	224	401	640	400	641	**401**	**640**	224	401	640	400	641	**401**	**640**
541.leela_r	224	532	697	530	700	**532**	**698**	224	532	697	530	700	**532**	**698**
548.exchange2_r	224	351	1670	**349**	**1680**	348	1690	224	351	1670	**349**	**1680**	348	1690
557.xz_r	224	577	420	**577**	**419**	577	419	224	575	421	573	422	**575**	**421**

SPECrate®2017_int_base = 706

SPECrate®2017_int_peak = 741

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.CPU + 512GiB Memory using OpenSUSE 15.2

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/amd_rate_aocc300_milan_A_lib/64;/home/cpu2017/amd_rate_ao
cc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

Submitted_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>
Submitted: Mon May 24 12:49:23 EDT 2021
Submission: cpu2017-20210524-26462.sub

Platform Notes

BIOS Configuration
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Maximum Cooling

(Continued on next page)

Platform Notes (Continued)

```
Memory PStates set to Disabled
Workload Profile set to Custom
 Infinity Fabric Power Management set to Disabled
   Infinity Fabric Performance State set to P0
 L2 HW Prefetcher set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on dl385g10v2 Wed Apr  1 12:29:38 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7663 56-Core Processor
      2  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
      60 61 62

From lscpu:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   48 bits physical, 48 bits virtual
     CPU(s):                          224
     On-line CPU(s) list:             0-223
     Thread(s) per core:              2
     Core(s) per socket:              56
     Socket(s):                       2
     NUMA node(s):                    16
     Vendor ID:                       AuthenticAMD
     CPU family:                      25
     Model:                           1
     Model name:                      AMD EPYC 7663 56-Core Processor
     Stepping:                        1
     CPU MHz:                         1796.297
     BogoMIPS:                        3992.35
```

(Continued on next page)

Platform Notes (Continued)

```
      Virtualization:                  AMD-V
      L1d cache:                       3.5 MiB
      L1i cache:                       3.5 MiB
      L2 cache:                        56 MiB
      L3 cache:                        512 MiB
      NUMA node0 CPU(s):               0-6,112-118
      NUMA node1 CPU(s):               7-13,119-125
      NUMA node2 CPU(s):               14-20,126-132
      NUMA node3 CPU(s):               21-27,133-139
      NUMA node4 CPU(s):               28-34,140-146
      NUMA node5 CPU(s):               35-41,147-153
      NUMA node6 CPU(s):               42-48,154-160
      NUMA node7 CPU(s):               49-55,161-167
      NUMA node8 CPU(s):               56-62,168-174
      NUMA node9 CPU(s):               63-69,175-181
      NUMA node10 CPU(s):              70-76,182-188
      NUMA node11 CPU(s):              77-83,189-195
      NUMA node12 CPU(s):              84-90,196-202
      NUMA node13 CPU(s):              91-97,203-209
      NUMA node14 CPU(s):              98-104,210-216
      NUMA node15 CPU(s):              105-111,217-223
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
      xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
```

(Continued on next page)

Platform Notes (Continued)

```
    cache size : 512 KB

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 16 nodes (0-15)
   node 0 cpus: 0 1 2 3 4 5 6 112 113 114 115 116 117 118
   node 0 size: 128774 MB
   node 0 free: 128489 MB
   node 1 cpus: 7 8 9 10 11 12 13 119 120 121 122 123 124 125
   node 1 size: 129018 MB
   node 1 free: 128730 MB
   node 2 cpus: 14 15 16 17 18 19 20 126 127 128 129 130 131 132
   node 2 size: 129020 MB
   node 2 free: 128843 MB
   node 3 cpus: 21 22 23 24 25 26 27 133 134 135 136 137 138 139
   node 3 size: 129019 MB
   node 3 free: 128855 MB
   node 4 cpus: 28 29 30 31 32 33 34 140 141 142 143 144 145 146
   node 4 size: 129020 MB
   node 4 free: 128721 MB
   node 5 cpus: 35 36 37 38 39 40 41 147 148 149 150 151 152 153
   node 5 size: 128995 MB
   node 5 free: 128628 MB
   node 6 cpus: 42 43 44 45 46 47 48 154 155 156 157 158 159 160
   node 6 size: 129020 MB
   node 6 free: 128830 MB
   node 7 cpus: 49 50 51 52 53 54 55 161 162 163 164 165 166 167
   node 7 size: 129007 MB
   node 7 free: 128831 MB
   node 8 cpus: 56 57 58 59 60 61 62 168 169 170 171 172 173 174
   node 8 size: 129020 MB
   node 8 free: 128844 MB
   node 9 cpus: 63 64 65 66 67 68 69 175 176 177 178 179 180 181
   node 9 size: 129019 MB
   node 9 free: 128850 MB
   node 10 cpus: 70 71 72 73 74 75 76 182 183 184 185 186 187 188
   node 10 size: 129020 MB
   node 10 free: 128856 MB
   node 11 cpus: 77 78 79 80 81 82 83 189 190 191 192 193 194 195
   node 11 size: 129019 MB
   node 11 free: 128857 MB
   node 12 cpus: 84 85 86 87 88 89 90 196 197 198 199 200 201 202
   node 12 size: 129020 MB
   node 12 free: 128847 MB
   node 13 cpus: 91 92 93 94 95 96 97 203 204 205 206 207 208 209
   node 13 size: 129019 MB
   node 13 free: 128743 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 14 cpus: 98 99 100 101 102 103 104 210 211 212 213 214 215 216
   node 14 size: 129020 MB
   node 14 free: 128852 MB
   node 15 cpus: 105 106 107 108 109 110 111 217 218 219 220 221 222 223
   node 15 size: 129017 MB
   node 15 free: 128839 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
     3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
     4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
     5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

  From /proc/meminfo
     MemTotal:       2113576196 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /usr/bin/lsb_release -d
     Ubuntu 20.04.1 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04.1 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04.1 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"
```

(Continued on next page)

Platform Notes (Continued)

```
uname -a:
   Linux dl385g10v2 5.4.0-42-generic #46-Ubuntu SMP Fri Jul 10 00:24:02 UTC 2020 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                     IBPB: conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 5 Apr 1 12:23

SPEC is set to: /home/cpu2017
   Filesystem                         Type  Size  Used Avail Use% Mounted on
   /dev/mapper/ubuntu--vg-ubuntu--lv ext4  182G   39G  135G  23% /

From /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen10 Plus
    Product Family: ProLiant
    Serial:         CN79340HC3

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
    16x UNKNOWN NOT AVAILABLE

BIOS:
   BIOS Vendor:       HPE
   BIOS Version:      A42
   BIOS Date:         02/15/2021
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     2.40
    Firmware Revision: 2.40

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```


(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r (continued):
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++98
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32

C++ benchmarks (except as noted below):
-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 13:29:37-0400.
Report generated on 2022-07-08 13:00:38 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.