# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R6515 (AMD EPYC 7713P 64-Core Processor)

SPECspeed®2017_fp_base = 164

SPECspeed®2017_fp_peak = 164

**CPU2017 License:** 55
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Apr-2021
**Hardware Availability:** Apr-2021
**Software Availability:** Mar-2021

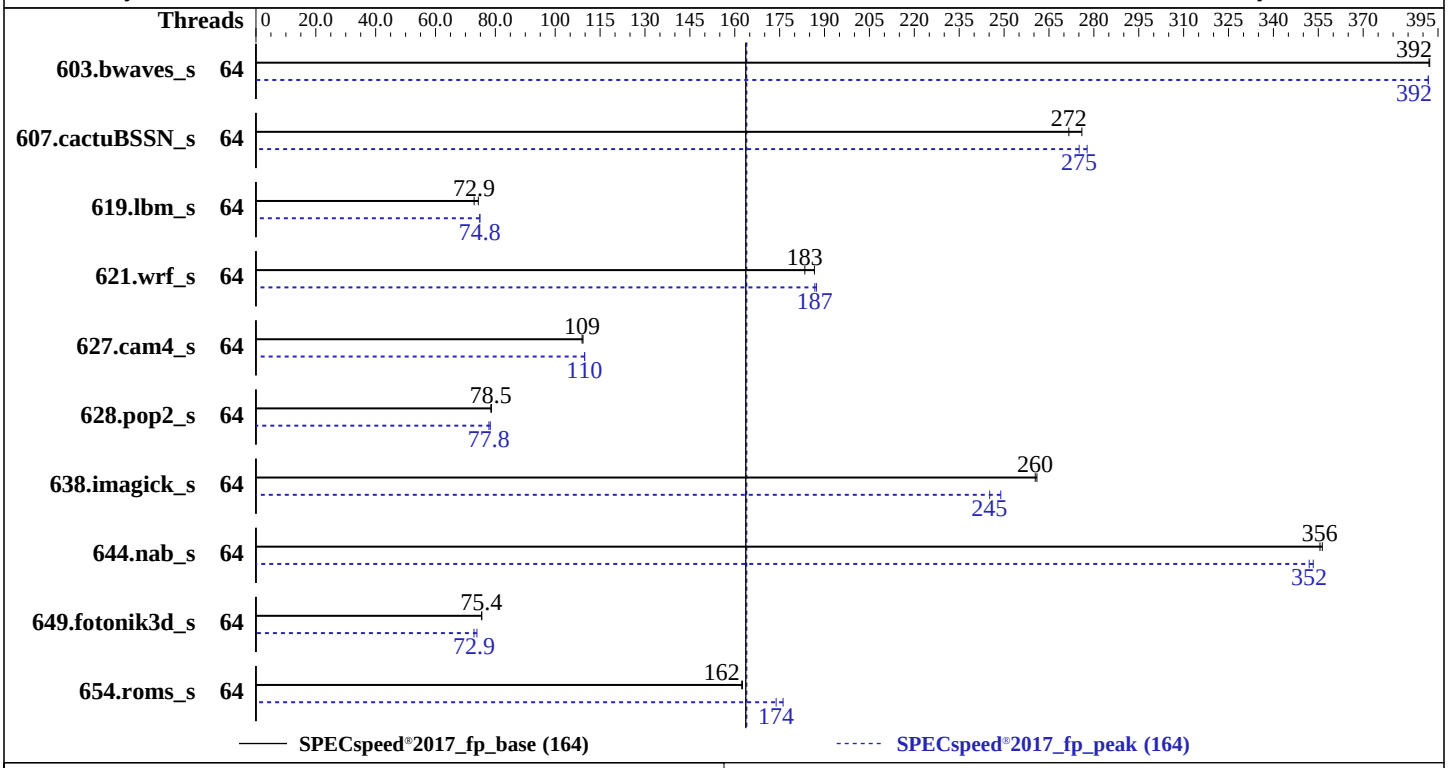


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7713P |
| Max MHz: | 3675 |
| Nominal: | 2000 |
| Enabled: | 64 cores, 1 chip |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 8 cores |
| Other: | None |
| Memory: | 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L) |
| Storage: | 128 GB on tmpfs |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86_64 |
| Compiler: | C/C++/Fortran: Version 3.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | Version 2.0.3 released Jan-2021 |
| File System: | tmpfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 64 | **151** | **392** | 150 | 392 | | | 64 | **151** | **392** | 151 | 392 | | |
| 607.cactuBSSN_s | 64 | **61.4** | **272** | 60.4 | 276 | | | 64 | 60.0 | 278 | **60.6** | **275** | | |
| 619.lbm_s | 64 | 70.5 | 74.3 | **71.8** | **72.9** | | | 64 | **70.0** | **74.8** | 70.0 | 74.8 | | |
| 621.wrf_s | 64 | **72.1** | **183** | 70.9 | 187 | | | 64 | **70.8** | **187** | 70.6 | 187 | | |
| 627.cam4_s | 64 | **81.3** | **109** | 81.1 | 109 | | | 64 | 80.7 | 110 | **80.7** | **110** | | |
| 628.pop2_s | 64 | 151 | 78.7 | **151** | **78.5** | | | 64 | **153** | **77.8** | 152 | 78.3 | | |
| 638.imagick_s | 64 | **55.4** | **260** | 55.3 | 261 | | | 64 | **58.8** | **245** | 58.0 | 249 | | |
| 644.nab_s | 64 | 49.0 | 356 | **49.1** | **356** | | | 64 | **49.6** | **352** | 49.5 | 353 | | |
| 649.fotonik3d_s | 64 | **121** | **75.4** | 121 | 75.5 | | | 64 | 123 | 73.8 | **125** | **72.9** | | |
| 654.roms_s | 64 | 96.8 | 163 | **97.0** | **162** | | | 64 | 89.4 | 176 | **90.6** | **174** | | |

**SPECspeed®2017_fp_base = 164**

**SPECspeed®2017_fp_peak = 164**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.7-aocc300/amd_speed_aocc300_milan_B_lib/64;/mn
     t/ramdisk/cpu2017-1.1.7-aocc300/amd_speed_aocc300_milan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
```

**(Continued on next page)**

## Environment Variables Notes (Continued)

```
     11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
     23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-63"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2


Benchmark run from a 128 GB ramdisk created with the cmd: "mount -t tmpfs -o size=128G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
 BIOS settings:
    Logical processor         : Disabled
    L3 Cache as NUMA Domain   : Enabled
    Virtualization Technology : Disabled
    DRAM Refresh Delay        : Performance
    System Profile            : Custom
       CPU Power Management   : Maximum Performance
       Memory Patrol Scrub    : Disabled
       PCI ASPM L1 Link
          Power Management    : Disabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-aocc300/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on rhel-8-3-amd Mon Apr 19 19:44:18 2021
```

**(Continued on next page)**

## Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7713P 64-Core Processor
      1  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 64
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              64
     On-line CPU(s) list: 0-63
     Thread(s) per core:  1
     Core(s) per socket:  64
     Socket(s):           1
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7713P 64-Core Processor
     Stepping:            1
     CPU MHz:             1719.691
     BogoMIPS:            3992.06
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            32768K
     NUMA node0 CPU(s):   0-7
     NUMA node1 CPU(s):   8-15
     NUMA node2 CPU(s):   16-23
     NUMA node3 CPU(s):   24-31
     NUMA node4 CPU(s):   32-39
     NUMA node5 CPU(s):   40-47
     NUMA node6 CPU(s):   48-55
     NUMA node7 CPU(s):   56-63
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
      fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
      sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7
    node 0 size: 128587 MB
    node 0 free: 124673 MB
    node 1 cpus: 8 9 10 11 12 13 14 15
    node 1 size: 128980 MB
    node 1 free: 128877 MB
    node 2 cpus: 16 17 18 19 20 21 22 23
    node 2 size: 129021 MB
    node 2 free: 128760 MB
    node 3 cpus: 24 25 26 27 28 29 30 31
    node 3 size: 129021 MB
    node 3 free: 128714 MB
    node 4 cpus: 32 33 34 35 36 37 38 39
    node 4 size: 129021 MB
    node 4 free: 128742 MB
    node 5 cpus: 40 41 42 43 44 45 46 47
    node 5 size: 129021 MB
    node 5 free: 128900 MB
    node 6 cpus: 48 49 50 51 52 53 54 55
    node 6 size: 129019 MB
    node 6 free: 128873 MB
    node 7 cpus: 56 57 58 59 60 61 62 63
    node 7 size: 116908 MB
    node 7 free: 116791 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  11  11  11  11  11  11
      1:  11  10  11  11  11  11  11  11
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     2:  11  11  10  11  11  11  11  11
     3:  11  11  11  10  11  11  11  11
     4:  11  11  11  11  10  11  11  11
     5:  11  11  11  11  11  10  11  11
     6:  11  11  11  11  11  11  10  11
     7:  11  11  11  11  11  11  11  10

  From /proc/meminfo
     MemTotal:       1044059304 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.3 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.3"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
        ANSI_COLOR="0;31"
     redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
     system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

  uname -a:
     Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                        Not affected
  CVE-2018-3620 (L1 Terminal Fault):                     Not affected
  Microarchitectural Data Sampling:                      Not affected
  CVE-2017-5754 (Meltdown):                              Not affected
  CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
  CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
  CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
```

(Continued on next page)

## Platform Notes (Continued)

```
                                                      disabled, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Nov 25 13:12

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-aocc300
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  128G  3.7G  125G   3% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R6515
     Product Family: PowerEdge

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
     8x Not Specified Not Specified

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.0.3
    BIOS Date:         01/15/2021
    BIOS Revision:     2.0

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

## Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

## Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

619.lbm_s: `-m64 -mno-adx -mno-sse4a`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math -flto`
`-fstruct-layout=5 -mllvm -unroll-threshold=50`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

619.lbm_s (continued):
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

638.imagick_s: Same as 619.lbm_s

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

649.fotonik3d_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

**(Continued on next page)**

## Peak Optimization Flags (Continued)

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

627.cam4_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

628.pop2_s: Same as 627.cam4_s

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

## Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.7 on 2021-04-19 20:44:17-0400.
Report generated on 2021-06-08 19:58:48 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.