# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650 V2
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017_int_base = 552

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** May-2021
**Hardware Availability:** Jul-2021
**Software Availability:** Feb-2021

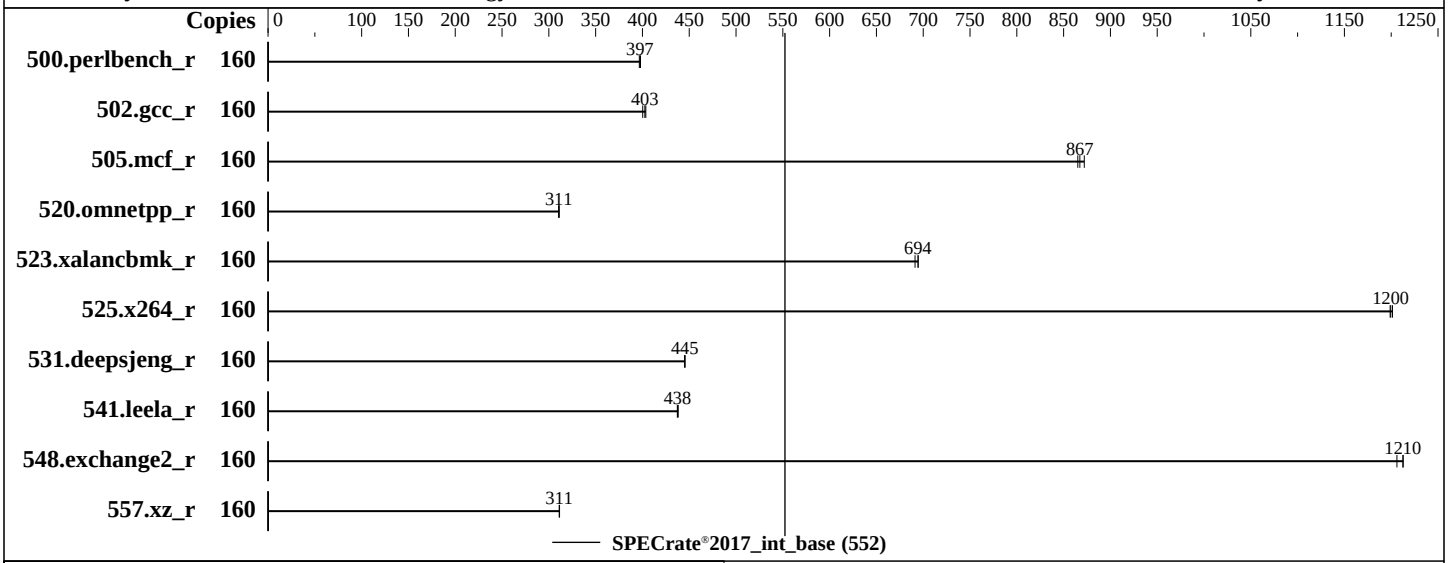


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8380 |
| Max MHz: | 3400 |
| Nominal: | 2300 |
| Enabled: | 80 cores, 2 chips, 2 threads/core |
| Orderable: | 2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1.25 MB I+D on chip per core |
| L3: | 60 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R) |
| Storage: | 1 x 480 GB SATA SSD |
| Other: | None |

### Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 8.3 (Ootpa)<br>Kernel 4.18.0-240.el8.x86_64 |
| Compiler: | C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;<br>Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;<br>C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version U8E109PT1 1.01 released Apr-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650 V2
(2.30 GHz, Intel Xeon Platinum 8380)

SPECrate®2017_int_base = 552

SPECrate®2017_int_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** May-2021
**Hardware Availability:** Jul-2021
**Software Availability:** Feb-2021

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 160 | **641** | **397** | 640 | 398 | 642 | 397 | | | | | | | |
| 502.gcc_r | 160 | **563** | **403** | 561 | 404 | 566 | 400 | | | | | | | |
| 505.mcf_r | 160 | **298** | **867** | 296 | 872 | 299 | 865 | | | | | | | |
| 520.omnetpp_r | 160 | 675 | 311 | **676** | **311** | 676 | 311 | | | | | | | |
| 523.xalancbmk_r | 160 | 244 | 691 | **243** | **694** | 243 | 695 | | | | | | | |
| 525.x264_r | 160 | 233 | 1200 | 234 | 1200 | **234** | **1200** | | | | | | | |
| 531.deepsjeng_r | 160 | **412** | **445** | 412 | 445 | 412 | 445 | | | | | | | |
| 541.leela_r | 160 | 606 | 437 | **606** | **438** | 605 | 438 | | | | | | | |
| 548.exchange2_r | 160 | **346** | **1210** | 348 | 1210 | 346 | 1210 | | | | | | | |
| 557.xz_r | 160 | **555** | **311** | 555 | 311 | 555 | 311 | | | | | | | |

**SPECrate®2017_int_base = 552**

**SPECrate®2017_int_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.5-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.5-ic202
     1.1-revB/lib/ia32:/home/cpu2017-1.1.5-ic2021.1-revB/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

**(Continued on next page)**

## General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Autonomous
DCU Streamer Prefetcher set to Disabled
Adjacent Cache Prefetch set to Disabled
UPI Link Disable set to Disabled 1 Link
CPU Frequency Limits set to Restrict maximum frequency
SNC set to Enabled

 Sysinfo program /home/cpu2017-1.1.5-ic2021.1-revB/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on ip10-245-59-38.labs.lenovo.com Tue May 11 08:35:38 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       2  "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 40
       siblings  : 80
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              160
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      On-line CPU(s) list: 0-159
      Thread(s) per core:  2
      Core(s) per socket:  40
      Socket(s):           2
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               106
      Model name:          Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
      Stepping:            6
      CPU MHz:             3000.000
      BogoMIPS:            4600.00
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            1280K
      L3 cache:            61440K
      NUMA node0 CPU(s):   0-19,80-99
      NUMA node1 CPU(s):   20-39,100-119
      NUMA node2 CPU(s):   40-59,120-139
      NUMA node3 CPU(s):   60-79,140-159
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin
      ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
      fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
      ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 61440 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
    88 89 90 91 92 93 94 95 96 97 98 99
    node 0 size: 125183 MB
    node 0 free: 128158 MB
    node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
    103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 1 size: 125553 MB
   node 1 free: 127876 MB
   node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
   123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
   node 2 size: 125807 MB
   node 2 free: 128661 MB
   node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
   143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
   node 3 size: 126668 MB
   node 3 free: 128692 MB
   node distances:
   node   0   1   2   3
     0:  10  11  20  20
     1:  11  10  20  20
     2:  20  20  10  11
     3:  20  20  11  10

 From /proc/meminfo
    MemTotal:       527983088 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux release 8.3 (Ootpa)

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.3 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.3"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
       ANSI_COLOR="0;31"
    redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

 uname -a:
    Linux ip10-245-59-38.labs.lenovo.com 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10
    EDT 2020 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                   barriers and __user pointer
                                                   sanitization
CVE-2017-5715 (Spectre variant 2):                 Mitigation: Enhanced IBRS, IBPB:
                                                   conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):           Not affected

run-level 3 May 11 08:32

SPEC is set to: /home/cpu2017-1.1.5-ic2021.1-revB
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   372G   21G  351G   6% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SD650 V2
    Product Family: ThinkSystem
    Serial:         1234567890

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:
   BIOS Vendor:       Lenovo
   BIOS Version:      U8E109PT1-1.01
   BIOS Date:         04/28/2021
   BIOS Revision:     1.1
   Firmware Revision: 1.40

(End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

## Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-D.html
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-D.xml
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-05-10 20:35:38-0400.
Report generated on 2021-06-08 20:01:43 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.