SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECrate®2017_int_base =	291
SPECrate®2017_int_energy_base =	1560
SPECrate®2017_int_peak =	308
SPECrate®2017_int_energy_peak =	1640

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

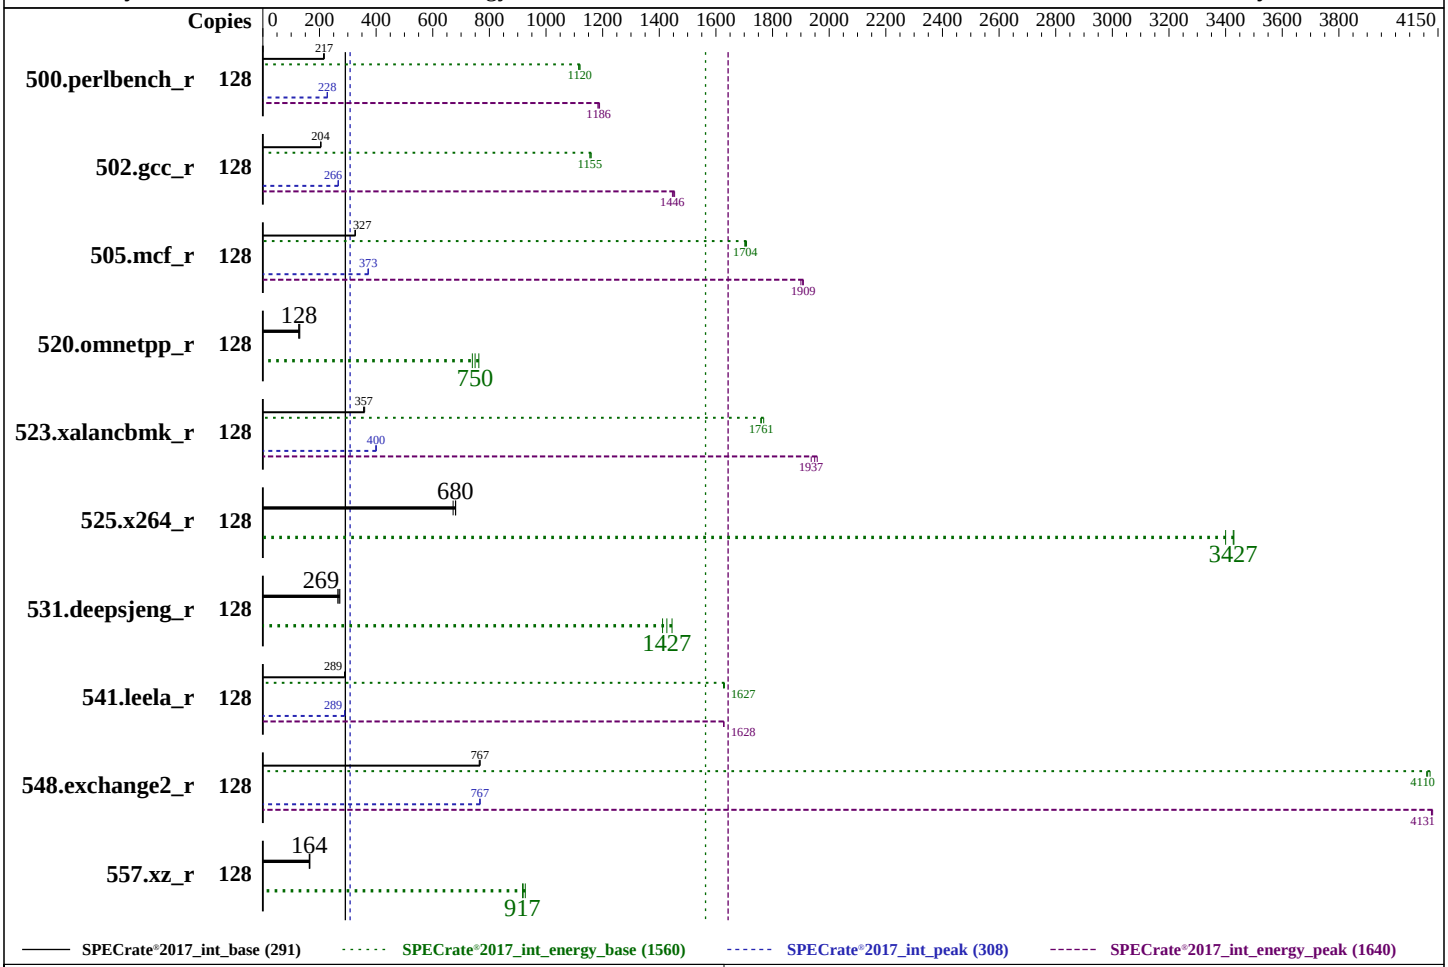

Hardware

CPU Name:	AMD EPYC 7713P
Max MHz:	3675
Nominal:	2000
Enabled:	64 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 (x86_64) Kernel 5.3.18-22-default
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	No
Firmware:	Lenovo BIOS Version CFE125S 6.0 released May-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to balance power and performance

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECrate®2017_int_base = 291

SPECrate®2017_int_energy_base = 1560

SPECrate®2017_int_peak = 308

SPECrate®2017_int_energy_peak = 1640

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Power

Max. Power (W): 239.48
Idle Power (W): 63.27
Min. Temperature (C): 21.81
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 4.11 of AMBT23L
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 750 W (non-redundant)
Details: ThinkSystem 750W Titanium Power Supply 7N67A00884
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A10239
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 6 x High Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UD17023E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GUANG ZHOU GRG METROLOGY & TEST CO.,LTD.
Calibration Label: J202009040176A-0001
Calibration Date: 25-Sep-2020
PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: Connected to PSU1
Current Ranges Used: 1A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	128	941	217	198	1120	210	225	**941**	**217**	**197**	**1120**	**210**	**229**	951	214	198	1120	209	223
502.gcc_r	128	**888**	**204**	**170**	**1160**	**192**	**222**	884	205	170	1160	192	218	888	204	170	1160	192	220
505.mcf_r	128	637	325	132	1710	208	237	**632**	**327**	**133**	**1700**	**210**	**237**	632	327	133	1700	210	237
520.omnetpp_r	128	1287	130	238	763	185	194	**1309**	**128**	**243**	**750**	**185**	**198**	1326	127	246	740	185	200
523.xalancbmk_r	128	376	360	82.8	1770	220	238	380	356	83.2	1760	219	236	**379**	**357**	**83.1**	**1760**	**219**	**232**
525.x264_r	128	329	681	70.8	3430	215	225	**329**	**680**	**70.9**	**3430**	**215**	**224**	334	672	71.5	3400	214	224
531.deepsjeng_r	128	539	272	110	1450	205	209	**546**	**269**	**112**	**1430**	**205**	**208**	554	265	113	1410	204	207
541.leela_r	128	**734**	**289**	**141**	**1630**	**192**	**207**	734	289	141	1630	192	207	734	289	141	1630	192	207
548.exchange2_r	128	**437**	**767**	**88.5**	**4110**	**202**	**209**	439	764	88.4	4110	201	208	437	767	88.2	4120	202	209
557.xz_r	128	832	166	162	927	195	210	842	164	163	919	194	210	**841**	**164**	**164**	**917**	**195**	**209**

SPECrate®2017_int_base = 291

SPECrate®2017_int_energy_base = 1560

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655
2.00 GHz, AMD EPYC 7713P

SPECrate®2017_int_base = 291

SPECrate®2017_int_energy_base = 1560

SPECrate®2017_int_peak = 308

SPECrate®2017_int_energy_peak = 1640

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Mar-2021

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	128	**895**	**228**	**186**	**1190**	**208**	**230**	897	227	187	1180	208	229	893	228	186	1190	208	226
502.gcc_r	128	681	266	136	1450	199	223	**681**	**266**	**136**	**1450**	**200**	**223**	680	267	135	1450	199	222
505.mcf_r	128	557	371	119	1900	214	237	554	373	119	1910	214	236	**555**	**373**	**119**	**1910**	**213**	**233**
520.omnetpp_r	128	1287	130	238	763	185	194	**1309**	**128**	**243**	**750**	**185**	**198**	1326	127	246	740	185	200
523.xalancbmk_r	128	337	401	74.8	1960	222	238	**338**	**400**	**75.6**	**1940**	**224**	**239**	339	399	75.1	1950	222	239
525.x264_r	128	329	681	70.8	3430	215	225	**329**	**680**	**70.9**	**3430**	**215**	**224**	334	672	71.5	3400	214	224
531.deepsjeng_r	128	539	272	110	1450	205	209	**546**	**269**	**112**	**1430**	**205**	**208**	554	265	113	1410	204	207
541.leela_r	128	734	289	141	1630	192	208	**734**	**289**	**141**	**1630**	**192**	**207**	733	289	141	1630	192	206
548.exchange2_r	128	438	766	88.1	4130	201	209	**437**	**767**	**88.0**	**4130**	**201**	**209**	437	767	88.1	4130	202	209
557.xz_r	128	832	166	162	927	195	210	842	164	163	919	194	210	**841**	**164**	**164**	**917**	**195**	**209**

SPECrate®2017_int_peak = 308

SPECrate®2017_int_energy_peak = 1640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base
integer runs to enable THP only on request.

'echo 0 > /proc/sys/kernel/numa_balancing' run as root to eliminate NUMA
location probing; the workloads are all bound to specific NUMA nodes.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.7-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/6
     4;/home/cpu2017-1.1.7-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/
     32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 Memory Speed set to Auto
 Core Performance Boost set to Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
NUMA nodes per socket set to NPS2
SOC P-states set to P3
LLC as NUMA Node set to Enabled
Memory interleaving set to Disabled

Sysinfo program /home/cpu2017-1.1.7-amd-aocc300-milan-A1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Fri Apr 17 21:20:53 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7713P 64-Core Processor
      1  "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 128
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       48 bits physical, 48 bits virtual
     CPU(s):              128
     On-line CPU(s) list: 0-127
     Thread(s) per core:  2
     Core(s) per socket:  64
     Socket(s):           1
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7713P 64-Core Processor
     Stepping:            1
     CPU MHz:             1730.934
     CPU max MHz:         2000.0000
     CPU min MHz:         1500.0000
     BogoMIPS:            3992.26
```

(Continued on next page)

Platform Notes (Continued)

```
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            32768K
      NUMA node0 CPU(s):   0-7,64-71
      NUMA node1 CPU(s):   8-15,72-79
      NUMA node2 CPU(s):   16-23,80-87
      NUMA node3 CPU(s):   24-31,88-95
      NUMA node4 CPU(s):   32-39,96-103
      NUMA node5 CPU(s):   40-47,104-111
      NUMA node6 CPU(s):   48-55,112-119
      NUMA node7 CPU(s):   56-63,120-127
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
      lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
      bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
      umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
    node 0 size: 32066 MB
    node 0 free: 31879 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
    node 1 size: 32250 MB
    node 1 free: 32055 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
    node 2 size: 32252 MB
    node 2 free: 31984 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
    node 3 size: 32250 MB
    node 3 free: 32077 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
```

(Continued on next page)

Platform Notes (Continued)

```
   node 4 size: 32252 MB
   node 4 free: 32071 MB
   node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
   node 5 size: 32250 MB
   node 5 free: 32074 MB
   node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
   node 6 size: 32218 MB
   node 6 free: 31949 MB
   node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
   node 7 size: 32237 MB
   node 7 free: 32060 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  11  11  11  11  11  11
     1:  11  10  11  11  11  11  11  11
     2:  11  11  10  11  11  11  11  11
     3:  11  11  11  10  11  11  11  11
     4:  11  11  11  11  10  11  11  11
     5:  11  11  11  11  11  10  11  11
     6:  11  11  11  11  11  11  10  11
     7:  11  11  11  11  11  11  11  10

 From /proc/meminfo
    MemTotal:       263963580 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 /usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 15 SP2

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP2"
       VERSION_ID="15.2"
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15:sp2"

 uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
   Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
   x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                        Not affected
 CVE-2018-3620 (L1 Terminal Fault):                     Not affected
 Microarchitectural Data Sampling:                      Not affected
 CVE-2017-5754 (Meltdown):                              Not affected
 CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
 CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                      IBPB: conditional, IBRS_FW, STIBP:
                                                        always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Apr 17 21:13

 SPEC is set to: /home/cpu2017-1.1.7-amd-aocc300-milan-A1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/md126p3   xfs   892G   35G  857G   4% /

 From /sys/devices/virtual/dmi/id
     Vendor:         Lenovo
     Product:        ThinkSystem SR655 -[7Y00000000]-
     Product Family: ThinkSystem
     Serial:         0123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200
     8x Unknown Unknown

 BIOS:
    BIOS Vendor:       Lenovo
    BIOS Version:      CFE125S
    BIOS Date:         05/11/2021
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     6.0

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)

(Continued on next page)

Peak Optimization Flags (Continued)

500.perlbench_r (continued):
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++98
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

502.gcc_r: `-L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

C++ benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

523.xalancbmk_r: `-L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml`
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2020-04-17 09:20:52-0400.
Report generated on 2021-06-08 20:08:28 by CPU2017 PS formatter v6442.
Originally published on 2021-06-08.