SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6525 (AMD EPYC 7443P 24-Core Processor)

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2021
Hardware Availability: Jul-2021
Software Availability: Mar-2021

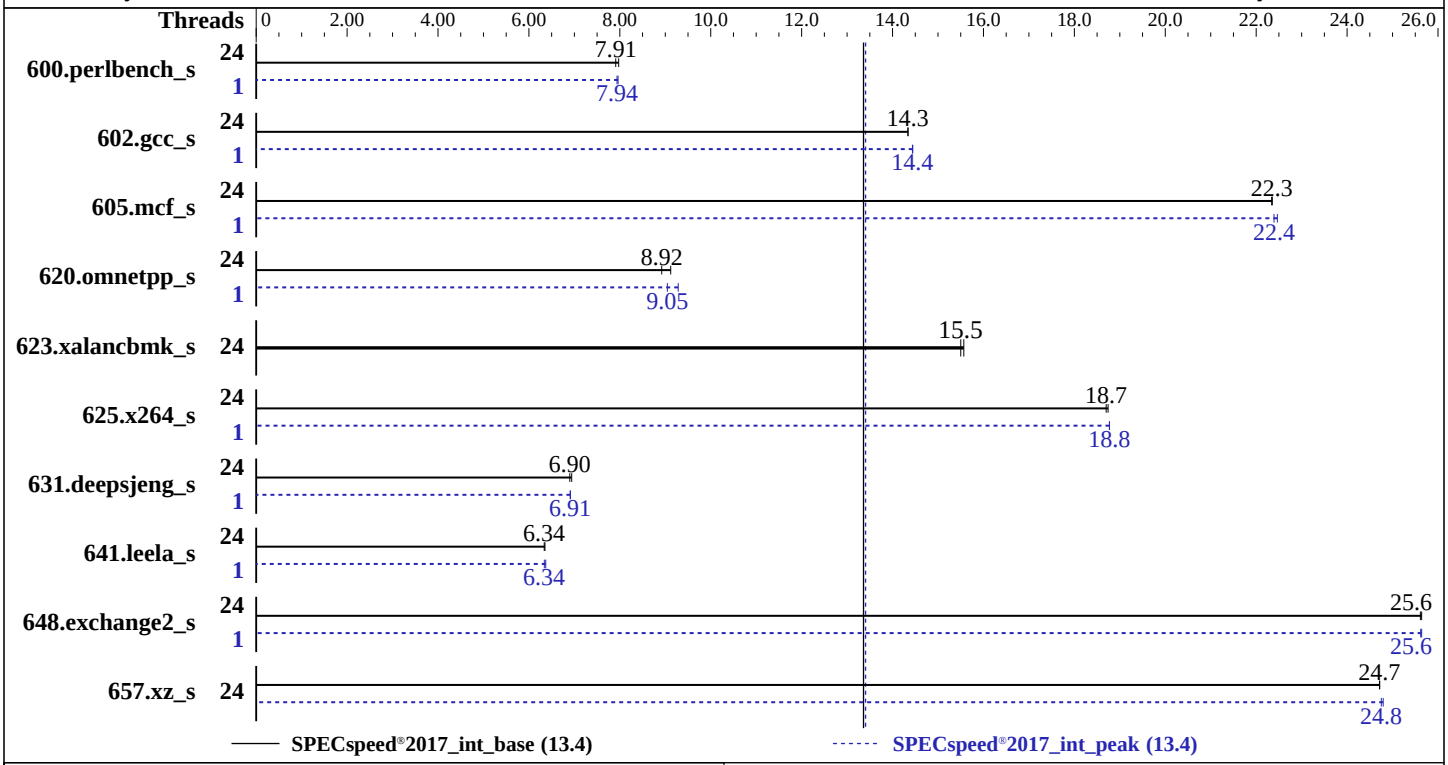

Hardware

CPU Name:	AMD EPYC 7443P
Max MHz:	4000
Nominal:	2850
Enabled:	24 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 2.2.5 released Apr-2021
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	**224**	**7.91**	223	7.97			1	**224**	**7.94**	223	7.96		
602.gcc_s	24	**278**	**14.3**	278	14.3			1	**276**	**14.4**	276	14.4		
605.mcf_s	24	211	22.4	**211**	**22.3**			1	210	22.5	**211**	**22.4**		
620.omnetpp_s	24	179	9.12	**183**	**8.92**			1	176	9.28	**180**	**9.05**		
623.xalancbmk_s	24	**91.4**	**15.5**	91.0	15.6			24	**91.4**	**15.5**	91.0	15.6		
625.x264_s	24	**94.3**	**18.7**	94.1	18.7			1	94.0	18.8	**94.0**	**18.8**		
631.deepsjeng_s	24	206	6.94	**208**	**6.90**			1	**207**	**6.91**	207	6.91		
641.leela_s	24	**269**	**6.34**	269	6.35			1	268	6.37	**269**	**6.34**		
648.exchange2_s	24	115	25.6	**115**	**25.6**			1	**115**	**25.6**	115	25.6		
657.xz_s	24	**250**	**24.7**	250	24.7			24	249	24.8	**250**	**24.8**		

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-23"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/amd_speed_aocc300_milan_B_lib/lib
     ;/mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/amd_speed_aocc300_milan_B_lib/lib
     32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "24"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-23"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2


 Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
         Logical Processor : Disabled
   L3 Cache as NUMA Domain : Enabled
 Virtualization Technology : Disabled
        DRAM Refresh Delay : Performance

            System Profile : Custom
      CPU Power Management : Maximum Performance
       Memory Patrol Scrub : Disabled
       PCI ASPM L1 Link
          Power Management : Disabled
  Algorithm Performance
     Boost Disable (ApbDis): Enabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on rhel-8-3-amd Mon Jun  7 03:48:44 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7443P 24-Core Processor
       1  "physical id"s (chips)
       24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
```

(Continued on next page)

Platform Notes (Continued)

```
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 24
       physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

  From lscpu from util-linux 2.32.1:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              24
       On-line CPU(s) list: 0-23
       Thread(s) per core:  1
       Core(s) per socket:  24
       Socket(s):           1
       NUMA node(s):        4
       Vendor ID:           AuthenticAMD
       CPU family:          25
       Model:               1
       Model name:          AMD EPYC 7443P 24-Core Processor
       Stepping:            1
       CPU MHz:             1875.344
       BogoMIPS:            5689.20
       Virtualization:      AMD-V
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            512K
       L3 cache:            32768K
       NUMA node0 CPU(s):   0-5
       NUMA node1 CPU(s):   6-11
       NUMA node2 CPU(s):   12-17
       NUMA node3 CPU(s):   18-23
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
       constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
       monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
       rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
       osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
       cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
       fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
       sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
       nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
       v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 4 5
  node 0 size: 257425 MB
  node 0 free: 253038 MB
  node 1 cpus: 6 7 8 9 10 11
  node 1 size: 258040 MB
  node 1 free: 257759 MB
  node 2 cpus: 12 13 14 15 16 17
  node 2 size: 258034 MB
  node 2 free: 257760 MB
  node 3 cpus: 18 19 20 21 22 23
  node 3 size: 245926 MB
  node 3 free: 245570 MB
  node distances:
  node   0   1   2   3
    0:  10  11  11  11
    1:  11  10  11  11
    2:  11  11  10  11
    3:  11  11  11  10

From /proc/meminfo
   MemTotal:       1043940236 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
   x86_64 x86_64 GNU/Linux
```


(Continued on next page)

Platform Notes (Continued)

```
 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                        Not affected
 CVE-2018-3620 (L1 Terminal Fault):                     Not affected
 Microarchitectural Data Sampling:                      Not affected
 CVE-2017-5754 (Meltdown):                              Not affected
 CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
 CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                     Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                        disabled, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Jun 7 03:41

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc300-B2
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G  4.0G  122G   4% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R6525
     Product Family: PowerEdge
     Serial:         1234567

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
     24x Not Specified Not Specified

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.2.5
    BIOS Date:         04/08/2021
    BIOS Revision:     2.2

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

600.perlbench_s: `-DSPEC_LINUX_X64 -DSPEC_LP64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LINUX -DSPEC_LP64`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:
```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

620.omnetpp_s: `-m64 -std=c++98 -mno-adx -mno-sse4a`

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

623.xalancbmk_s: `basepeak = yes`

631.deepsjeng_s: `Same as 620.omnetpp_s`

641.leela_s: `Same as 620.omnetpp_s`

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

C++ benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-06-07 04:48:44-0400.
Report generated on 2021-08-04 18:40:34 by CPU2017 PS formatter v6442.
Originally published on 2021-08-03.