SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_base = 204

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Dec-2020

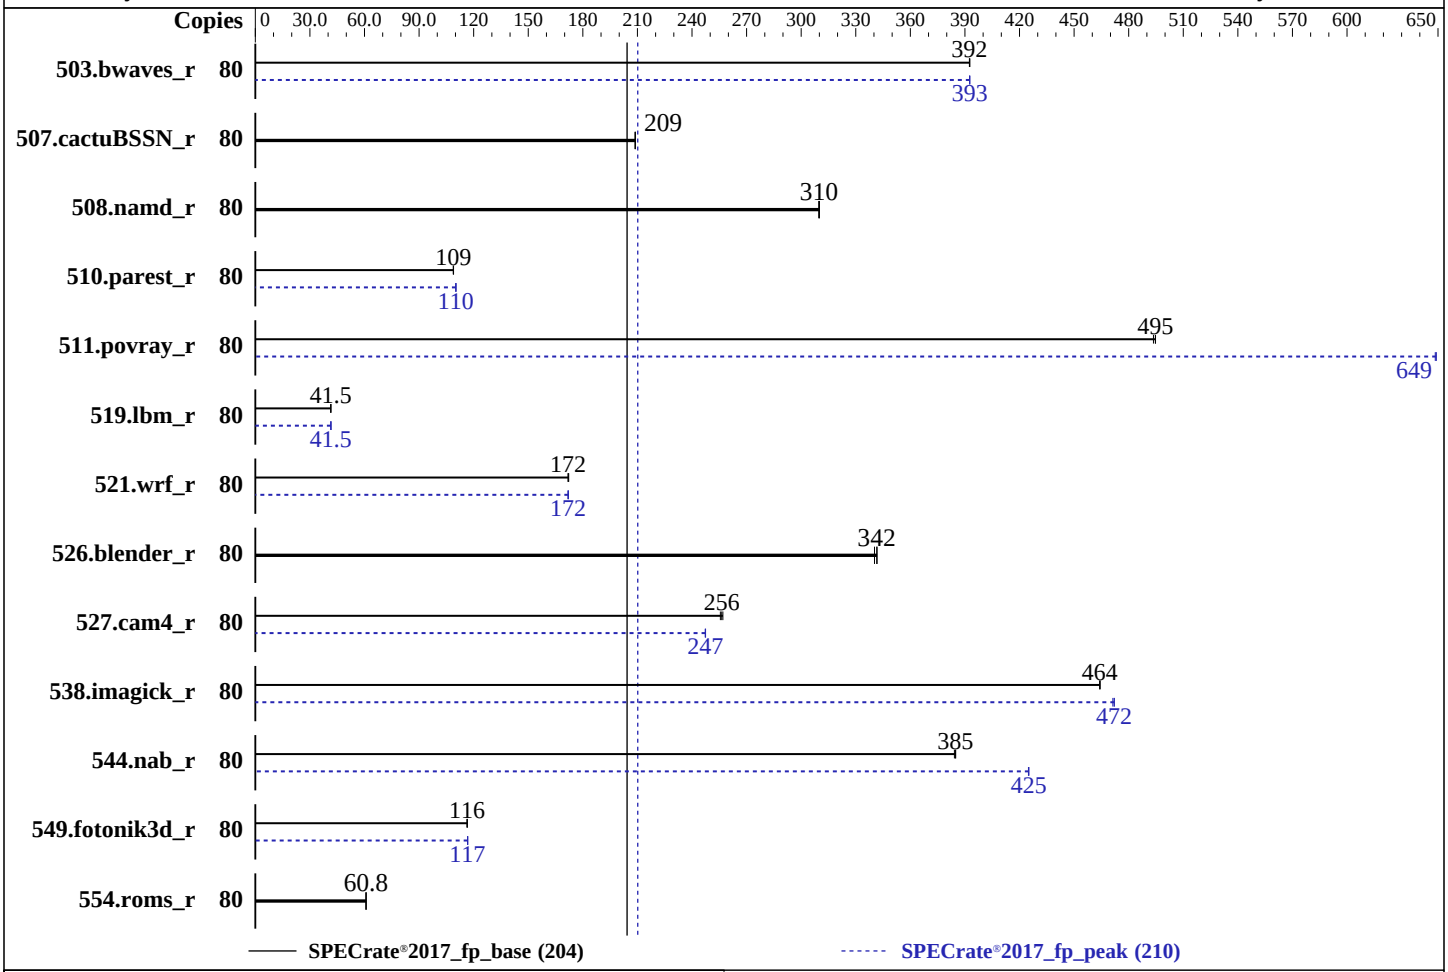

Hardware

CPU Name:	Ampere Altra Q80-30
Max MHz:	3000
Nominal:	2800
Enabled:	80 cores, 1 chip
Orderable:	1 chips
Cache L1:	64 KB I + 64 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	811 GB, NVME, M.2, PCIe Gen3
Other:	None

Software

OS:	CentOS Linux release 8.3.2011 4.18.0-240.1.1.el8_3.aarch64
Compiler:	C/C++/Fortran: Version 10.2.1 of Ampere GCC
Parallel:	No
Firmware:	Version F05 released Jan-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	Jemalloc memory allocator library v5.2.1
Power Management:	OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.)

E252-P30-00 (Ampere Altra Q80-30 2.8GHz)

SPECrate®2017_fp_base = 204

SPECrate®2017_fp_peak = 210

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Feb-2021
Hardware Availability: Mar-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	2044	392	**2044**	**392**	2043	393	80	**2043**	**393**	2043	393	2044	393
507.cactuBSSN_r	80	**485**	**209**	485	209	485	209	80	**485**	**209**	485	209	485	209
508.namd_r	80	245	310	245	310	**245**	**310**	80	245	310	245	310	**245**	**310**
510.parest_r	80	**1922**	**109**	1924	109	1921	109	80	1898	110	**1899**	**110**	1899	110
511.povray_r	80	378	495	378	494	**378**	**495**	80	**288**	**649**	288	648	288	649
519.lbm_r	80	**2033**	**41.5**	2031	41.5	2034	41.5	80	2030	41.5	2030	41.5	**2030**	**41.5**
521.wrf_r	80	1040	172	**1042**	**172**	1043	172	80	1042	172	**1042**	**172**	1043	172
526.blender_r	80	**357**	**342**	357	342	358	340	80	**357**	**342**	357	342	358	340
527.cam4_r	80	547	256	544	257	**546**	**256**	80	565	247	**566**	**247**	566	247
538.imagick_r	80	429	464	**429**	**464**	429	464	80	422	471	**422**	**472**	421	472
544.nab_r	80	350	385	**350**	**385**	350	384	80	**317**	**425**	317	425	317	425
549.fotonik3d_r	80	2678	116	**2677**	**116**	2677	116	80	2671	117	**2672**	**117**	2672	117
554.roms_r	80	2087	60.9	**2089**	**60.8**	2089	60.8	80	2087	60.9	**2089**	**60.8**	2089	60.8

SPECrate®2017_fp_base = 204

SPECrate®2017_fp_peak = 210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
Binaries were compiled on a system with 2x Ampere Altra Q80-30 CPU
chips + 256 GB Memory using CentOS 8.3

Ampere GCC 10.2.1 is available via
https://github.com/AmpereComputing/ampere-gcc/releases
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
Set dirty_ratio=8 to limit dirty cache to 8% of memory
i.e. echo 8 | sudo tee /proc/sys/vm/dirty_ratio
Set swappiness=1 to swap only if necessary
i.e. echo 1 | sudo tee /proc/sys/vm/swappiness
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
i.e. echo 1 | sudo tee /proc/sys/vm/zone_reclaim_mode
Set drop_caches=3 to reset caches before invoking runcpu
i.e. echo 3 | sudo tee /proc/sys/vm/drop_caches
Set numa_balancing=0 to disable automatic numa balancing
```

(Continued on next page)

Operating System Notes (Continued)

```
i.e. echo 0 | sudo tee /proc/sys/kernel/numa_balancing
Switch off all ktune and tuned settings
i.e. sudo tuned-adm off
Transparent huge pages set to 'never'
i.e. sudo bash -c "echo never > /sys/kernel/mm/transparent_hugepage/enabled"

runcpu command invoked through numactl i.e.
  numactl --interleave=0-3 runcpu
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/amptest/ampere_spec2017/jemalloc/install/lib:/home/amptest/ampere
     _spec2017/gcc/install/lib64/:/home/amptest/ampere_spec2017/gcc/install/l
     ib/:/home/ampere_spec2017/gcc/install/lib64:/home/ampere_spec2017/jemall
     oc/install/lib:"
```

General Notes

```
Jemalloc v5.2.1 is available via
https://github.com/jemalloc/jemalloc/releases/download/5.2.1/jemalloc-5.2.1.tar.bz2
It was built on CentOS 8.3 using Version 10.2.1 of Ampere GCC with configure options
--prefix=/home/amptest/jemalloc/install --with-lg-quantum=3

NA:  The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
     is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
     is mitigated in the system as tested and documented.
NA:  The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
     is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
Chipset > ANC Mode > Quadrant

Sysinfo program /home/ampere_spec2017/spec2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Mon Feb 22 23:23:58 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo
```

(Continued on next page)

Platform Notes (Continued)

```
 From /proc/cpuinfo
 *
 * Did not identify cpu model.  If you would
 * like to write your own sysinfo program, see
 * www.spec.org/cpu2017/config.html#sysinfo
 *
 *
 * 0 "physical id" tags found.  Perhaps this is an older system,
 * or a virtualized system.  Not attempting to guess how to
 * count chips/cores for this system.
 *
       80 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)

 From lscpu:
      Architecture:        aarch64
      Byte Order:          Little Endian
      CPU(s):              80
      On-line CPU(s) list: 0-79
      Thread(s) per core:  1
      Core(s) per socket:  80
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           ARM
      Model:               1
      Stepping:            r3p1
      CPU max MHz:         3000.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            50.00
      L1d cache:           64K
      L1i cache:           64K
      L2 cache:            1024K
      NUMA node0 CPU(s):   0-79
      Flags:               fp asimd evtstrm aes pmull sha1 sha2 crc32 atomics fphp asimdhp
      cpuid asimdrdm lrcpc dcpop asimddp ssbs

 From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
 physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
   28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
   57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
   node 0 size: 260857 MB
   node 0 free: 258481 MB
   node distances:
```

(Continued on next page)

Platform Notes (Continued)

```
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       267117952 kB
   HugePages_Total:       0
   Hugepagesize:     524288 kB

/sbin/tuned-adm active
    No current active profile.

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

/usr/bin/lsb_release -d
   CentOS Linux release 8.3.2011

From /etc/*release* /etc/*version*
   centos-release: CentOS Linux release 8.3.2011
   centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
   os-release:
      NAME="CentOS Linux"
      VERSION="8"
      ID="centos"
      ID_LIKE="rhel fedora"
      VERSION_ID="8"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="CentOS Linux 8"
      ANSI_COLOR="0;31"
   redhat-release: CentOS Linux release 8.3.2011
   system-release: CentOS Linux release 8.3.2011
   system-release-cpe: cpe:/o:centos:centos:8

uname -a:
   Linux localhost.localdomain 4.18.0-240.1.1.el8_3.aarch64 #1 SMP Thu Nov 19 22:13:39
   UTC 2020 aarch64 aarch64 aarch64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):                 Mitigation: __user pointer
                                                   sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5715 (Spectre variant 2):                    Not affected
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Feb 22 22:47

 SPEC is set to: /home/ampere_spec2017/spec2017
    Filesystem          Type  Size  Used Avail Use% Mounted on
    /dev/mapper/cl-home xfs   811G  119G  692G  15% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         GIGABYTE
     Product:        E252-P30-00
     Product Family: Server
     Serial:         0123456789012345678 9AB

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     1x Array 1 Manufacturer 10 Array 1 Part Number 10
     1x Array 1 Manufacturer 12 Array 1 Part Number 12
     1x Array 1 Manufacturer 14 Array 1 Part Number 14
     1x Array 1 Manufacturer 16 Array 1 Part Number 16
     1x Array 1 Manufacturer 2 Array 1 Part Number 2
     1x Array 1 Manufacturer 4 Array 1 Part Number 4
     1x Array 1 Manufacturer 6 Array 1 Part Number 6
     1x Array 1 Manufacturer 8 Array 1 Part Number 8
     8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F05
    BIOS Date:         01/19/2021
    BIOS Revision:     5.15
    Firmware Revision: 1.3

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
g++ (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
GNU Fortran (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
gcc (Ampere Computing Build 11923 20201215) 10.2.1 20201216
Copyright (C) 2020 Free Software Foundation, Inc.
This is free software; see the source for copying conditions.  There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gfortran gcc

Benchmarks using both C and C++:
g++ gcc

Benchmarks using Fortran, C, and C++:
g++ gcc gfortran

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LINUX -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-mabi=lp64 -std=c99 -L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-strict-aliasing -ljemalloc

C++ benchmarks:
-mabi=lp64 -std=c++03 -L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -ljemalloc

Fortran benchmarks:
-mabi=lp64 -L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-stack-arrays -ljemalloc

Benchmarks using both Fortran and C:
-mabi=lp64 -std=c99 -L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-stack-arrays -fno-strict-aliasing
-ljemalloc

Benchmarks using both C and C++:
-mabi=lp64 -std=c++03 -std=c99
-L/home/amptest/ampere_spec2017/gcc/install/lib64

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-strict-aliasing -ljemalloc

Benchmarks using Fortran, C, and C++:
-mabi=lp64 -std=c++03 -std=c99
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -g -Ofast
-mcpu=neoverse-n1 -flto -fno-stack-arrays -fno-strict-aliasing
-ljemalloc

Base Other Flags

C benchmarks:
-Wl,-Map,mapfile

C++ benchmarks:
-Wl,-Map,mapfile

Fortran benchmarks:
-fallow-argument-mismatch -Wl,-Map,mapfile

Benchmarks using both Fortran and C:
-fallow-argument-mismatch -Wl,-Map,mapfile

Benchmarks using both C and C++:
-Wl,-Map,mapfile

Benchmarks using Fortran, C, and C++:
-fallow-argument-mismatch -Wl,-Map,mapfile

Peak Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gfortran gcc

Benchmarks using both C and C++:
g++ gcc

Benchmarks using Fortran, C, and C++:
g++ gcc gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-mabi=lp64 -std=c99 -L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib -fprofile-generate
-fprofile-use -g -Ofast -mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96 --param max-inline-insns-auto=64
--param inline-unit-growth=96 -ljemalloc

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -mabi=lp64 -std=c++03
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=256
--param max-inline-insns-auto=128
--param inline-unit-growth=256 -ffinite-loops -ljemalloc

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r: -mabi=lp64
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
-fno-stack-arrays -ljemalloc

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -mabi=lp64 -std=c99
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96 -fno-stack-arrays -ljemalloc

527.cam4_r: -mabi=lp64 -std=c99
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96 -fno-stack-arrays
-fno-strict-aliasing -ljemalloc

Benchmarks using both C and C++:

511.povray_r: -mabi=lp64 -std=c++03 -std=c99
-L/home/amptest/ampere_spec2017/gcc/install/lib64
-L/home/amptest/ampere_spec2017/gcc/install/lib
-L/home/amptest/ampere_spec2017/jemalloc/install/lib
-fprofile-generate -fprofile-use -g -Ofast
-mcpu=neoverse-n1 -funroll-loops -flto=32
--param early-inlining-insns=96
--param max-inline-insns-auto=64
--param inline-unit-growth=96

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r (continued):
`--param early-inlining-insns=256`
`--param max-inline-insns-auto=128`
`--param inline-unit-growth=256 -ffinite-loops`
`-fno-strict-aliasing -ljemalloc`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-w -Wl,-Map,mapfile`

C++ benchmarks:
`-Wl,-Map,mapfile`

Fortran benchmarks (except as noted below):
`-Wl,-Map,mapfile`

554.roms_r: `-fallow-argument-mismatch -Wl,-Map,mapfile`

Benchmarks using both Fortran and C:

521.wrf_r: `-w -fallow-argument-mismatch -Wl,-Map,mapfile`

527.cam4_r: `-fallow-argument-mismatch -Wl,-Map,mapfile`

Benchmarks using both C and C++:
`-Wl,-Map,mapfile`

Benchmarks using Fortran, C, and C++:
`-fallow-argument-mismatch -Wl,-Map,mapfile`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/gcc.2021-07-21.html`
`http://www.spec.org/cpu2017/flags/GIGA-BYTE-platform-settings-Altra-rev.2.html`

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/gcc.2021-07-21.xml
http://www.spec.org/cpu2017/flags/GIGA-BYTE-platform-settings-Altra-rev.2.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-22 10:23:57-0500.
Report generated on 2021-09-17 12:26:04 by CPU2017 PS formatter v6442.
Originally published on 2021-09-17.