SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021
Hardware Availability: Jun-2019
Software Availability: Dec-2020

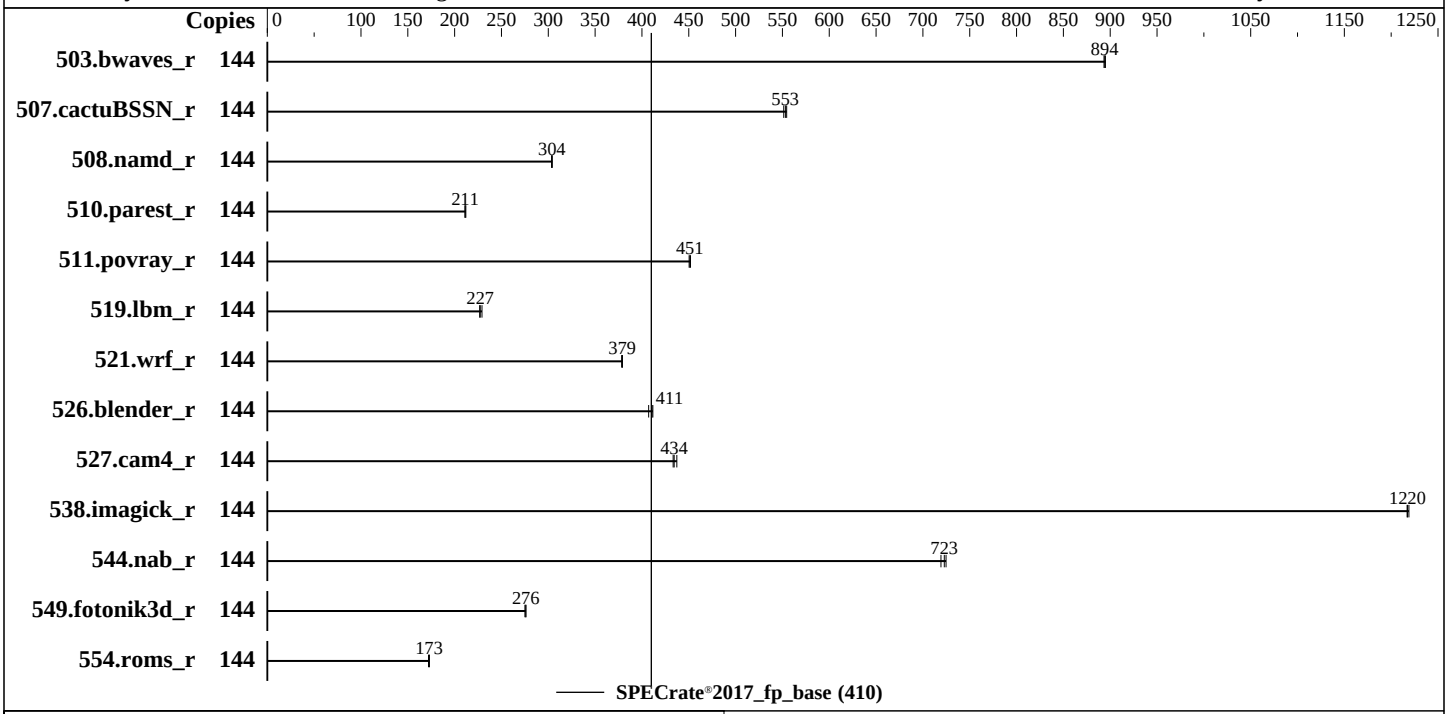

Hardware

CPU Name:	Intel Xeon Gold 5220
Max MHz:	3900
Nominal:	2200
Enabled:	72 cores, 4 chips, 2 threads/core
Orderable:	1,2,3,4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	24.75 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	1 x 960GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	No
Firmware:	Version 2.00.50 released Jun-2021 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R6900 G3 (Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 410

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Aug-2021
Hardware Availability: Jun-2019
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	**1615**	**894**	1614	895	1616	893							
507.cactuBSSN_r	144	329	555	331	551	**330**	**553**							
508.namd_r	144	451	303	450	304	**450**	**304**							
510.parest_r	144	1777	212	**1783**	**211**	1785	211							
511.povray_r	144	744	452	747	450	**745**	**451**							
519.lbm_r	144	669	227	**668**	**227**	662	229							
521.wrf_r	144	**851**	**379**	853	378	851	379							
526.blender_r	144	**534**	**411**	539	407	533	412							
527.cam4_r	144	576	437	**580**	**434**	581	433							
538.imagick_r	144	**294**	**1220**	294	1220	294	1220							
544.nab_r	144	337	719	334	725	**335**	**723**							
549.fotonik3d_r	144	2033	276	**2033**	**276**	2040	275							
554.roms_r	144	1323	173	**1324**	**173**	1330	172							

SPECrate®2017_fp_base = 410

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
Set SNC to Enabled
Set IMC Interleaving to 1-way Interleave

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Wed Aug 18 03:55:59 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
      4  "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              144
     On-line CPU(s) list: 0-143
```

(Continued on next page)

Platform Notes (Continued)

```
      Thread(s) per core:  2
      Core(s) per socket:  18
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
      Stepping:            6
      CPU MHz:             2700.094
      CPU max MHz:         3900.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            4400.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            25344K
      NUMA node0 CPU(s):   0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
      NUMA node1 CPU(s):   3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
      NUMA node2 CPU(s):   18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
      NUMA node3 CPU(s):   21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
      NUMA node4 CPU(s):   36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
      NUMA node5 CPU(s):   39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
      NUMA node6 CPU(s):   54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
      NUMA node7 CPU(s):   57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
      vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
      md_clear flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 25344 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
    node 0 size: 95048 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 free: 88463 MB
   node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
   node 1 size: 96763 MB
   node 1 free: 93004 MB
   node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
   node 2 size: 96763 MB
   node 2 free: 93164 MB
   node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
   node 3 size: 96763 MB
   node 3 free: 93175 MB
   node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
   node 4 size: 96763 MB
   node 4 free: 92191 MB
   node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
   node 5 size: 96763 MB
   node 5 free: 93150 MB
   node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
   node 6 size: 96763 MB
   node 6 free: 93202 MB
   node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
   node 7 size: 96761 MB
   node 7 free: 93172 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  31  31  21  21  21  21
     1:  11  10  31  31  21  21  21  21
     2:  31  31  10  11  21  21  21  21
     3:  31  31  11  10  21  21  21  21
     4:  21  21  21  21  10  11  31  31
     5:  21  21  21  21  11  10  31  31
     6:  21  21  21  21  31  31  10  11
     7:  21  21  21  21  31  31  11  10

  From /proc/meminfo
     MemTotal:       790930604 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
```


(Continued on next page)

Platform Notes (Continued)

```
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
       ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
   Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):                         Not affected
Microarchitectural Data Sampling:                          Not affected
CVE-2017-5754 (Meltdown):                                  Not affected
CVE-2018-3639 (Speculative Store Bypass):                  Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
CVE-2017-5753 (Spectre variant 1):                         Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
CVE-2017-5715 (Spectre variant 2):                         Mitigation: Enhanced IBRS, IBPB:
                                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort):                 Mitigation: Clear CPU buffers; SMT
                                                           vulnerable

run-level 3 Aug 17 23:18

SPEC is set to: /home/speccpu
   Filesystem           Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   839G  118G  721G  15% /home

From /sys/devices/virtual/dmi/id
    Vendor:         New H3C Technologies Co., Ltd.
    Product:        H3C UniServer R6900 G3
    Product Family: Rack
    Serial:         210235A3T0H204000004

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
```

(Continued on next page)

Platform Notes (Continued)

```
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x Micron 18ASF4G72PDZ-2G9E1 32 GB 2 rank 2933, configured at 2666
    24x NO DIMM NO DIMM

BIOS:
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      2.00.50
   BIOS Date:         06/16/2021
   BIOS Revision:     5.14

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.4-CLX-RevB.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-18 03:55:58-0400.
Report generated on 2021-09-14 19:15:03 by CPU2017 PS formatter v6442.
Originally published on 2021-09-14.