# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz,Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

**CPU2017 License:** 006042
**Test Sponsor:** Netweb Pte Ltd
**Tested by:** Tyrone Systems

**Test Date:** Aug-2021
**Hardware Availability:** Apr-2021
**Software Availability:** Jun-2021

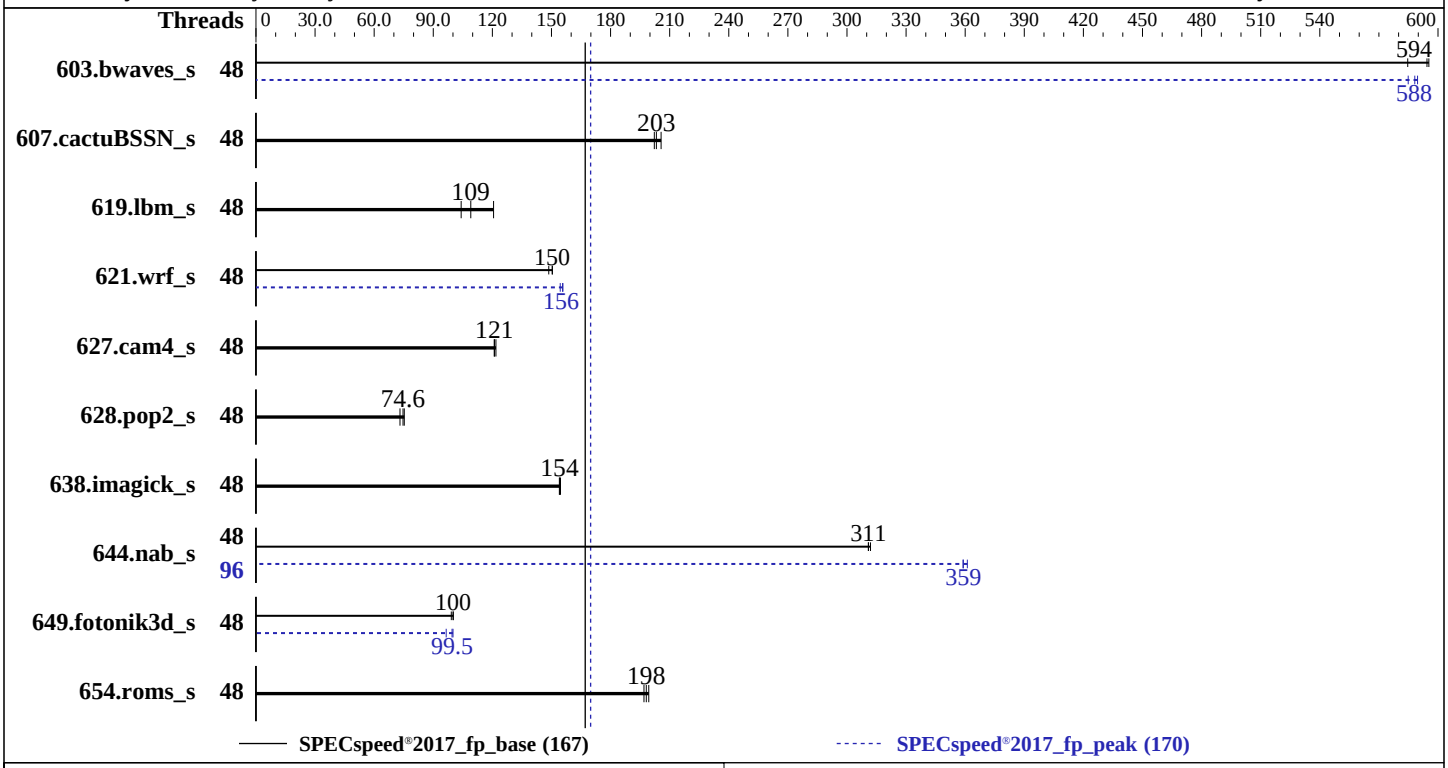


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Gold 6336Y |
| Max MHz: | 3600 |
| Nominal: | 2400 |
| Enabled: | 48 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 Chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1.25 MB I+D on chip per core |
| L3: | 36 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (32 x 32 GB 1Rx4 PC4-3200AA-R) |
| Storage: | 1 x 250 GB SATA SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | CentOS Linux release 8.4.2105<br>Kernel 4.18.0-305.3.1.el8.x86_64 |
| Compiler: | C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;<br>Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;<br>C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux |
| Parallel: | Yes |
| Firmware: | Version SE5C620.86B.01.01.0003.2104260124 released Apr-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 48 | **99.3** | **594** | 99.1 | 595 | 101 | 585 | 48 | 101 | 585 | **100** | **588** | 100 | 590 |
| 607.cactuBSSN_s | 48 | **82.0** | **203** | 81.1 | 206 | 82.4 | 202 | 48 | **82.0** | **203** | 81.1 | 206 | 82.4 | 202 |
| 619.lbm_s | 48 | 50.3 | 104 | 43.4 | 121 | **48.0** | **109** | 48 | 50.3 | 104 | 43.4 | 121 | **48.0** | **109** |
| 621.wrf_s | 48 | 89.0 | 149 | 87.9 | 150 | **88.0** | **150** | 48 | 85.6 | 154 | 84.9 | 156 | **85.0** | **156** |
| 627.cam4_s | 48 | 73.3 | 121 | 72.8 | 122 | **73.2** | **121** | 48 | 73.3 | 121 | 72.8 | 122 | **73.2** | **121** |
| 628.pop2_s | 48 | **159** | **74.6** | 158 | 75.3 | 162 | 73.1 | 48 | **159** | **74.6** | 158 | 75.3 | 162 | 73.1 |
| 638.imagick_s | 48 | 93.3 | 155 | **93.6** | **154** | 93.7 | 154 | 48 | 93.3 | 155 | **93.6** | **154** | 93.7 | 154 |
| 644.nab_s | 48 | 56.0 | 312 | 56.2 | 311 | **56.2** | **311** | 96 | 48.4 | 361 | **48.7** | **359** | 48.7 | 359 |
| 649.fotonik3d_s | 48 | 91.0 | 100 | **91.1** | **100** | 91.9 | 99.2 | 48 | **91.6** | **99.5** | 94.4 | 96.6 | 91.1 | 100 |
| 654.roms_s | 48 | 79.0 | 199 | **79.5** | **198** | 79.9 | 197 | 48 | 79.0 | 199 | **79.5** | **198** | 79.9 | 197 |

**SPECspeed®2017_fp_base = 167**

**SPECspeed®2017_fp_peak = 170**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled locally by Netweb
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS Settings:
Power Technology set to Custom
Power Performance Tuning set to BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode set to Performance
LLC Dead Line Alloc set to Disable

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Mon Aug 23 04:30:43 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
       2  "physical id"s (chips)
       96 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 24
       siblings  : 48
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              96
      On-line CPU(s) list: 0-95
      Thread(s) per core:  2
      Core(s) per socket:  24
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      BIOS Vendor ID:        Intel(R) Corporation
      CPU family:            6
      Model:                 106
      Model name:            Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
      BIOS Model name:       Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
      Stepping:              6
      CPU MHz:               1575.316
      CPU max MHz:           3600.0000
      CPU min MHz:           800.0000
      BogoMIPS:              4800.00
      Virtualization:        VT-x
      L1d cache:             48K
      L1i cache:             32K
      L2 cache:              1280K
      L3 cache:              36864K
      NUMA node0 CPU(s):     0-11,48-59
      NUMA node1 CPU(s):     12-23,60-71
      NUMA node2 CPU(s):     24-35,72-83
      NUMA node3 CPU(s):     36-47,84-95
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
      invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
      intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
      cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
      pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
      la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 36864 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59
    node 0 size: 257671 MB
    node 0 free: 256471 MB
    node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71
    node 1 size: 258005 MB
```


**(Continued on next page)**

## Platform Notes (Continued)

```
   node 1 free: 257549 MB
   node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
   node 2 size: 258042 MB
   node 2 free: 255424 MB
   node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
   node 3 size: 258040 MB
   node 3 free: 253503 MB
   node distances:
   node   0   1   2   3
     0:  10  11  20  20
     1:  11  10  20  20
     2:  20  20  10  11
     3:  20  20  11  10

 From /proc/meminfo
    MemTotal:       1056521552 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 From /etc/*release* /etc/*version*
    centos-release: CentOS Linux release 8.4.2105
    centos-release-upstream: Derived from Red Hat Enterprise Linux 8.4
    os-release:
       NAME="CentOS Linux"
       VERSION="8"
       ID="centos"
       ID_LIKE="rhel fedora"
       VERSION_ID="8"
       PLATFORM_ID="platform:el8"
       PRETTY_NAME="CentOS Linux 8"
       ANSI_COLOR="0;31"
    redhat-release: CentOS Linux release 8.4.2105
    system-release: CentOS Linux release 8.4.2105
    system-release-cpe: cpe:/o:centos:centos:8

 uname -a:
    Linux localhost.localdomain 4.18.0-305.3.1.el8.x86_64 #1 SMP Tue Jun 1 16:14:33 UTC
    2021 x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 CVE-2018-12207 (iTLB Multihit):                     Not affected
 CVE-2018-3620 (L1 Terminal Fault):                  Not affected
 Microarchitectural Data Sampling:                   Not affected
 CVE-2017-5754 (Meltdown):                           Not affected
 CVE-2018-3639 (Speculative Store Bypass):           Mitigation: Speculative Store
                                                     Bypass disabled via prctl and
                                                     seccomp
 CVE-2017-5753 (Spectre variant 1):                  Mitigation: usercopy/swapgs
                                                     barriers and __user pointer
                                                     sanitization
 CVE-2017-5715 (Spectre variant 2):                  Mitigation: Enhanced IBRS, IBPB:
                                                     conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):            Not affected

 run-level 3 Aug 23 00:27

 SPEC is set to: /home/cpu2017
    Filesystem          Type  Size  Used Avail Use% Mounted on
    /dev/mapper/cl-home xfs   163G   91G   73G  56% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Intel Corporation
     Product:        WHITLEY
     Product Family: Family
     Serial:         UNKNOWN

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Micron 18ASF4G72PZ-3G2E1 32 GB 1 rank 3200

 BIOS:
    BIOS Vendor:       Intel Corporation
    BIOS Version:      SE5C620.86B.01.01.0003.2104260124
    BIOS Date:         04/26/2021

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

**(Continued on next page)**

## Base Portability Flags (Continued)

644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

## Base Optimization Flags

C benchmarks:
`-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries`

Fortran benchmarks:
`-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc`

Benchmarks using both Fortran and C:
`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc`

## Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

644.nab_s: `icx`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`ifort icc`

**(Continued on next page)**

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs

**(Continued on next page)**

## Peak Optimization Flags (Continued)

621.wrf_s (continued):
`-L/usr/local/je5.0.1-64/lib -ljemalloc`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-23 04:30:43-0400.
Report generated on 2021-09-20 13:58:25 by CPU2017 PS formatter v6442.
Originally published on 2021-09-20.